Cata+List 2019

Design & Architectural collections

running from 1st September 2019

Rastislav Sabo - KELMAX

Košovská cesta 24
971 01 Prievidza

e-mail: kelmax@kelmax.sk www.kelmax.sk tel.: +421 944 919 288

Index

pag.		pag.		pag.		pag.	
14	Bic B02	50	Nelly	162	Pop P07 bi-color Ø6,0	75	Pop Petit
18	Bic B07	52	Nemo	163	Pop P07 bi-color Ø12,0	186	Pop Polifemo PF1 - PF2
19	Bic B12	55	Pop Bijou	164	Pop P07 Bulb	168	Pop PW7
20	Bic B16	72	Pop Bon Bon	170	Pop P07 Dynamic Ø12,5	110	Pop PX3 Ø10,0
21	Bic B25-B50-B60	219	Pop Brooklyn	160	Pop P07 mono-color Ø6,0 - Ø12,0	112	Pop PX3 NaNo Ø10,0
196	Binari 230V	59	Pop C'est Moi	171	Pop P07 Pull Ø12,5	167	Pop PX7 Ø11,2
197	Binari 48V	63	Pop C'est Toi	172	Pop P10	118	Pop PY3 Ø10,0
24	Box	69	Pop Chapeau	173	Pop P11	119	Pop PY3 NaNo Ø10,0
22	Brick	66	Pop Chérie	174	Pop P12 Ø3,0	122	Pop PY3 Ø10,0 Glass
27	Club C1 bi - color	205	Pop Host bi-color Ø32,0	176	Pop P12 L Ø3,0	123	Pop PY3 NaNo Ø10,0 Glass
26	Club C1 mono - color	206	Pop Host bi-color Ø80,0	175	Pop P12 T Ø3,0	127	Pop PZ3 Ø10,0
28	Club C2 mono - color	211	Pop Host L/M - T/N	117	Pop P12 K Ø3,0	226	Tim T01
29	Club C3 mono - color	201	Pop Host mono-color Ø32,0	178	Pop P12 Ø7,0	228	Tim T02
80	Easy Pop P00 Ø3,0	202	Pop Host mono-color Ø80,0	179	Pop P12 Ø12,5	229	Tim T03
81	Easy Pop P00 NaNo Ø3,0	208	Pop Host W Ø32,0 - Ø80,0	181	Pop P12 Cup Ø3,0	227	Tim T13
93	Easy Pop P01 Bulb	217	Pop P120 - P200	183	Pop P12 Cup Ø6,0	230	Tim T22
83	Easy Pop P01 Ø4,0	78	Pop P00 Ø3,0	185	Pop P12 Cup Ø12,0	231	Tim T32
88	Easy Pop P01 Ø5,5	79	Pop P00 NaNo Ø3,0	180	Pop P12 Ring Ø3,0	233	Tim T25 - T60 - T120
90	Easy Pop P01 NaNo Ø5,5	82	Pop P01 Ø4,0	182	Pop P12 Ring Ø6,0	235	Tim T124 - T196
99	Easy Pop P02 Ø5,5	92	Pop P01 Bulb	184	Pop P12 Ring Ø12,0	237	Wally W01D Dynamic Ø12,5
106	Easy Pop P03 Ø8,0	84	Pop P01 Ø5,5	150	Pop Ring Static Ø7,0	238	Wally Ring WR1D Dynamic Ø13,1
108	Easy Pop P03 NaNo Ø8,0	86	Pop P01 NaNo Ø5,5	151	Pop Ring Static Ø13,1	239	Wally Ring WR1P Pull Ø12,5
139	Easy Pop P04 Ø8,0	97	Pop P01 Dynamic Ø12,5	152-153	Pop Ring Dynamic Ø13,1	240	Wally W07 Pull Ø12,5
114	Easy Pop PX3 Ø10,0	94	Pop P01 Static Ø12,5	154	Pop Ring Pull Ø12,5	241	Wally W16 Pull Ø12,5
116	Easy Pop PX3 NaNo Ø10,0	98	Pop P02 Ø5,5	223	Pop Up 1	243	X - Running
120	Easy Pop PY3 Ø10,0	100	Pop P03 Ø6,0	224	Pop Up 207	244	Zip 60-90
121	Easy Pop PY3 NaNo Ø10,0	101	Pop P03 NaNo Ø6,0	188	Pop P13 Ø7,0		
124	Easy Pop PY3 Ø10,0 Glass	102	Pop P03 Ø8,0	189	Pop P13 Ø12,5		
125	Easy Pop PY3 NaNo Ø10,0 Glass	104	Pop P03 NaNo Ø8,0	190	Pop P14 Ø3,0		
129	Easy Pop PZ3 Ø10,0	130	Pop P03 Ø17,0	190	Pop P14 Ø7,0		
31	e-Pad	135	Pop P03 Look Ø17,0	191	Pop P14 Ø12,5		
32	J&B	132	Pop P03 Static Ø17,0	192	Pop P15 Ø3,0		
34	J&J	133	Pop P03 Wall Wash Ø17,0	192	Pop P15 Ø7,0		
36	Jo Fly	137	Pop P04 Ø8,0	193	Pop P15 Ø12,5		
39	Jumbo	140	Pop P04 Ø12,0	194	Pop P16 Pull	248-251	*Filo System (diagrams)*
23	micro - Box	142	Pop P04 Magic Ø3,0	199	Pop P30 Sun Pull		
45	MoMa bi-color Ø40,0 - Ø60,0	145	Pop P04K Magic Ø3,0	198	Pop P30 Sun Static	252-259	*Housings index*
49	MoMa L/M	146	Pop P05 Ø6,7 - Ø8,2 brickwork	213	Pop P40 Chandelier	267	*Installation instructions Bic housings*
43	MoMa mono-color Ø40,0 - Ø60,0	148	Pop P05 Ø6,7 - Ø8,2 plasterboard	214	Pop P50 Pinocchio	268-269	*Installation instructions Easy collection*
47	MoMa W Ø40,0 - Ø60,0	156	Pop P06 mono-color Ø6,0 - Ø12,0	215	Pop P55 Pinocchio	260-266	*Installation instructions Pop housings*
		158	Pop P06 bi-color Ø6,0				
		159	Pop P06 bi-color Ø12,0				

Recessed



Bic B02 5x5 *p.14*



Bic B02 8x8 *p.16*

Bic B07 7x7 *p.18*

Bic B12 12x12 *p.19*

Bic B16 16x16 *p.20*



Bic B25 - B50 - B60 *p.21*

Pop P00 Ø3,0 *p.78*

Pop P00 NaNo Ø3,0 *p.79*

Easy Pop P00 Ø3,0 *p.80*

Easy Pop P00 NaNo Ø3,0 *p.81*

Pop P01 Ø4,0 *p.82*

Easy Pop P01 Ø4,0 *p.83*



Pop P01 Ø5,5 *p.84*



Pop P01 NaNo Ø5,5 *p.86*

Easy Pop P01 Ø5,5 *p.88*

Easy Pop P01 NaNo Ø5,5 *p.90*

Pop P01 Bulb *p.92*

Easy Pop P01 Bulb *p.93*

Pop P01 Static Ø12,5 *p.94*

Pop P01 Dynamic Ø12,5 *p.97*

Pop P02 Ø5,5 *p.98*

Easy Pop P02 Ø5,5 *p.99*

Pop P03 Ø6,0 *p.100*

Pop P03 NaNo Ø6,0 *p.101*

Pop P03 Ø8,0 *p.102*

Pop P03 NaNo Ø8,0 *p.104*

Easy Pop P03 Ø8,0 *p.106*

Easy Pop P03 NaNo Ø8,0 *p.108*

Pop PX3 Ø10,0 *p.110*

Pop PX3 NaNo Ø10,0 *p.112*

Easy Pop PX3 Ø10,0 *p.114*

Easy Pop PX3 NaNo Ø10,0 *p.116*

Pop PY3 Ø10,0 *p.118*

Easy Pop PY3 Ø10,0 *p.120*

Pop PY3 Ø10,0 Glass *p.122*

Easy Pop PY3 Ø10,0 Glass *p.124*

Pop PZ3 Ø10,0 *p.127*

Easy Pop PZ3 Ø10,0 *p.129*

Pop P03 Ø17,0 *p.130*

Pop P03 Static Ø17,0 *p.132*

Pop P03 Wall Wash Ø17,0 *p.133*

Pop P03 Look Ø17,0 *p.135*

Pop P04 Ø8,0 *p.137*

Easy Pop P04 Ø8,0 *p.139*

Pop P04 Ø12,0 *p.140*

Pop P04 Magic Ø12,0 *p.142*

Pop P05 *p.146*

Pop Ring Static Ø7,0 *p.150*

Pop Ring Static Ø13,1 *p.151*

Pop Ring Dynamic Ø13,1 *p.152*

Pop Ring Dynamic Ø13,1 *p.153*

Pop Ring Pull Ø12,5 *p.154*

Recessed

Pop P10 *p.172*

Pop P11 *p.173*

Pop P12 Ø3,0 *p.174*

Pop P12 T Ø3,0 *p.175*

Pop P12L Ø3,0 *p.176*

Pop P12 Ø7,0 *p.178*

Pop P12 Ø12,5 *p.179*

Pop P12 Ring Ø3,0 *p.180*

Pop P12 Ring Ø6,0 *p.182*

Pop P12 Ring Ø12,0 *p.184*

Wally Dynamic Ø12,5 *p.237*

Wally Ring Dynamic Ø13,1 *p.238*

Wally Ring Pull Ø12,5 *p.239*

Zip 60 - 90 *p.244*

Housings index *p.252*

Installation housings Pop *p.260*



Installation housings Bic *p.267*

Installation Easy products *p.268*

Ceiling

MoMa W *p.47*

Pop P04K *p.145*

Pop P12K *p.117*

Pop P07 Ø7,0 - Ø12,0 *p.160*

Pop P07 Bulb *p.164*

Pop P07 bi-color Ø6,0 *p.162*

Pop PX7 Ø11,2 *p.167*

Pop P07 bi-color Ø12,0 *p.163*

Pop PW7 *p.168*

Pop P07D Dynamic Ø12,5 *p.170*

Pop P07P Pull Ø12,5 *p.171*

Pop P12 Cup Ø3,0 *p.181*

Pop P12 Cup Ø6,0 *p.183*

Pop P12 Cup Ø12,0 *p.185*

Pop P13 Ø7,0 - Ø12,5 *p.188*

Pop P30 Sun Static *p.198*

Pop P30 Sun Pull *p.199*

Pop Host Ø32,0 - Ø80,0 *p.208*

Tim T01 *p.226*

Tim T13 *p.227*

Tim T02 *p.228*



Tim T03 *p.229*

Tim T22 *p.230*

Tim T32 *p.231*

Wally W07P Pull *p.240*

Tim T25 - T60 - T120 *p.233*

Wall

Bric p.22

Micro Box 7/1 p.23

Micro Box 7/2 p.23

Box p.24

e-Pad Led p.31

MoMa W p.47

MoMa L/M p.49

Nelly p.50

Nemo p.52

Pop P07 Bulb p.164

Pop P12 Cup Ø3,0 p.181

Pop P12 Cup Ø6,0 p.183

Pop P12 Cup Ø12,0 p.185

Pop P13 Ø7,0 p.188

Pop P13 Ø12,5 p.189


Pop Host W p.208

Pop Host L/M/ - T/N p.211

Pop Up1 p.223

Projectors for track

Pop P14 Ø3,0 p.190

Pop P15 Ø3,0 p.192

Pop P14 Ø7,0 p.190

Pop P15 Ø7,0 p.192

Pop P14 Ø12,5 p.191

Pop P15 Ø12,5 p.193

Pop P16 Pull p.194

Wally W16 Pull p.241


Track 230V 3-CCT p.196


Led Track 48V p.197

Floor lamps

Pop Polifemo p.186

Pop P55 Pinocchio p.215

Pop Up 207 p.224

Table lamp

Pop P50 Pinocchio p.214

Suspension

Club C1 mono-color *p.26*



Club C1 bi-color *p.27*

Club C2 mono-color *p.28*

Club C3 mono-color *p.29*

J&B *p.32*

J&J *p.34*

Jo Fly *p.36*

Jumbo *p.39*

MoMa mono-color *p.43*

MoMa bi-color *p.45*

Filo system:

Pop Bijou *p.56*
C'est Moi *p.60*
C'est Toi *p.64*
Chérie *p.67*
Chapeau *p.70*
BonBon *p.73*
Petit *p.76*

Filo system: *example of installations from pag. 248 to pag. 251*

Pop Bijou *p.55*

Pop C'est Moi *p.59*

Pop C'est Toi *p.63*

Pop Chérie *p.66*

Pop Chapeau *p.69*

Pop BonBon *p.72*

Pop Petit *p.75*

Pop P06 Ø6,0- Ø12,0 *p.156*

Pop P06 bi-color Ø6,0 *p.158*

Pop P06 bi-color Ø12,0 *p.159*

Suspension

Pop Host mono-color Ø 32,0 *p.201*

Pop Host mono-color Ø80,0 *p.202*

Pop Host bi-color Ø 32,0 *p.205*

Pop Host bi-color Ø80,0 *p.206*

Pop P40 Chandelier *p.213*

Pop P120/P200 *p.217*

Pop Brooklyn *p.219*

Tim T124/T196 *p.235*

X-Running *p.243*

Bic 02 5x5 with trim *(for plasterboard and brickwork)*



For plasterboard

IP40	MC-E=3	CE
500m/A	LED 6W	CRI>90
3B02.2 ■ **S.**□	P = 2,0cm	€ **120,00**
4B02.2 ■ **S.**□ *With honeycomb*	P = 1,5cm	€ **125,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	22°
3 = 3000 °K	552	
4 = 4000 °K	594	

IP54	MC-E=3	CE
500m/A	LED 6W	CRI>90
3B02.2 ■ **S9.**□	P = 2,0cm	€ **125,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	22°
3 = 3000 °K	552	
4 = 4000 °K	594	

© (m-M)	Driver	
3KIT.500.15 (1-1)	on/off	€ **27,00**
3KIT.501.50 (1-7)	DALI - Push - 1...10V *Remote installation*	€ **105,00**
3KIT.502.20 (1-3)	DALI *Remote installation*	€ **59,00**
3KIT.503.20 (1-3)	Push - 1...10 *Remote installation*	€ **59,00**
3KIT.504.10 (1-1)	IGBT - TRIAC	€ **32,00**

□ *Frame*

02	●	Black	
06	○	White	
C	●	Copper	*15 Working Days*
S	●	Brass	*15 Working Days*

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.



For brickwork

IP40	MC-E=3	CE
500m/A	LED 6W	CRI>90
3B2M.2 ■ **S.**□	P = 2,0cm	€ **125,00**
4B2M.2 ■ **S.**□ *With honeycomb*	P = 1,5cm	€ **130,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	22°
3 = 3000 °K	552	
4 = 4000 °K	594	

IP54	MC-E=3	CE
500m/A	LED 6W	CRI>90
3B2M.2 ■ **S9.**□	P = 2,0cm	€ **130,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	22°
3 = 3000 °K	552	
4 = 4000 °K	594	

© (m-M)	Driver	
3KIT.500.15 (1-1)	on/off	€ **27,00**



Housing for brickwork

1M02.050.01	€ **34,00**

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Bic 02 8x8 with trim *(for plasterboard and brickwork)*



For plasterboard

IP40	MC-E=3	CE ▽
350m/A	LED 11W	CRI>90
3B02.3 ■◪.□	P = 2,6cm	€ 120,00
4B02.3 ■◪.□ *With honeycomb*	P = 2,1cm	€ 125,00

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	1195	S = 22°
3 = 3000 °K	1257	T = 15°
4 = 4000 °K	1313	

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour	€ 95,00
3KIT.900.03 (1-1)	3:00 hours	€ 137,00

□ *Frame*

02	Black	
06	White	
C	Copper	*15 Working Days*
S	Brass	*15 Working Days*

*(**m-M**) = min. Led unit - Max Led unit.*
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.



For brickwork

IP40	MC-E=3	CE ▽
350m/A	LED 11W	CRI>90
3B2M.3 ■◪.□	P = 2,6cm	€ 125,00
4B2M.3 ■◪.□ *With honeycomb*	P = 2,1cm	€ 130,00

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	1195	S = 22°
3 = 3000 °K	1257	T = 15°
4 = 4000 °K	1313	

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00



Housing for brickwork

1M02.080.01	€ 36,00

*(**m-M**) = min. Led unit - Max Led unit.*
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Bic 07 *7x7 trimless (only for plasterboard)*

IP20 — CE

220V ÷ 240V

3B07.210.☐	GU10 max 50W	€	50,00

IP20 — CE

12V

3B07.220.☐	GU5.3 max 50W	€	41,00
3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP40 — DimToWarm — CE

220V ÷ 240V	LED 6W	CRI 95
3B07.3W◪◪.☐	IGBT - TRIAC	€ 140,00

driver included

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K min. 1800°K	max 445 lm min. 10 lm	M = 30° S = 18°

IP40 — MC-E=3 — CE

350m/A	LED 11W	CRI>90
3B07.3■◪◪.☐		€ 120,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	1195	S = 22°
3 = 3000°K	1257	T = 12°
4 = 4000°K	1313	

	© (m-M)	Driver		
3KIT.350.1L	(1-1)	on/off	€	21,00
3KIT.351.40	(1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15	(1-1)	DALI	€	59,00
3KIT.353.15	(1-1)	Push - 1...10V	€	59,00
3KIT.354.18	(1-1)	IGBT - TRIAC	€	32,00

☐ *Frame*

02	●	Black
06	○	White

Code	P1	P
B07.210.☐	3,6	11,5
B07.220.☐	3,1	10,0
B07.3■◪◪.☐	3,8	13,1
B07.3W◪◪.☐	3,8	10,4

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01	(1-1)	1:00 hour	€	95,00
3KIT.900.03	(1-1)	3:00 hours	€	137,00

Housing for plasterboard

■	1Z07.070.01	Single	€	22,00
■■	1Z07.070.2L	Double	€	40,00
■■■	1Z07.070.3L	Triple	€	58,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Bic 12 *12x12 trimless (only for plasterboard)*

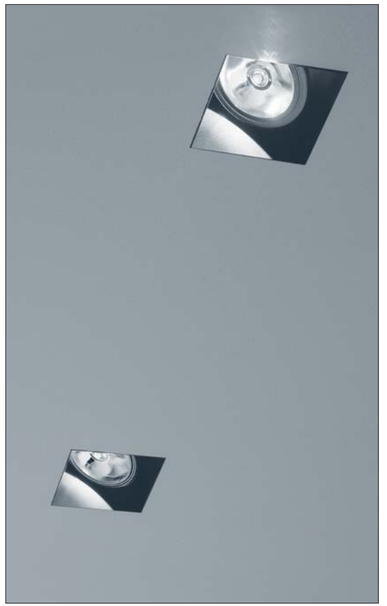



IP20 — CE

12V

3B12.530.☐	G53 max 50W	€	64,00
3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP20 — MC-E=3 — CE

350 - 500 m/A	LED	CRI>90
3B12.5■◪◪.☐		€ 135,00 ▼

	© (m-M)	LED 12,5W	350m/A		
3KIT.350.1L	(1-1)	on/off	€	21,00	
3KIT.351.40	(1-3)	DALI - Push - 1...10V	€	105,00	
3KIT.352.15	(1-1)	DALI	€	59,00	
3KIT.353.15	(1-1)	Push - 1...10V	€	59,00	
3KIT.354.18	(1-1)	IGBT - TRIAC	€	32,00	

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	1477	L = 60°
3 = 3000°K	1565	S = 24°
4 = 4000°K	1635	T = 12°

	© (m-M)	LED 18,4W	500m/A		
3KIT.500.1L	(1-1)	on/off	€	21,00	
3KIT.501.50	(1-3)	DALI - Push - 1...10V	€	105,00	
3KIT.502.20	(1-1)	DALI	€	59,00	
3KIT.503.20	(1-1)	Push - 1...10V	€	59,00	
3KIT.504.20	(1-1)	IGBT - Triac	€	32,00	

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	2020	L = 60°
3 = 3000°K	2140	S = 24°
4 = 4000°K	2236	T = 12°

☐ *Frame*

02	●	Black
06	○	White

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01	(1-1)	1:00 hour	€	95,00
3KIT.900.03	(1-1)	3:00 hours	€	137,00



Housing for plasterboard

■	1Z12.120.01	Single	€	39,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Bic 16 16x16 trimless (only for plasterboard) ROS

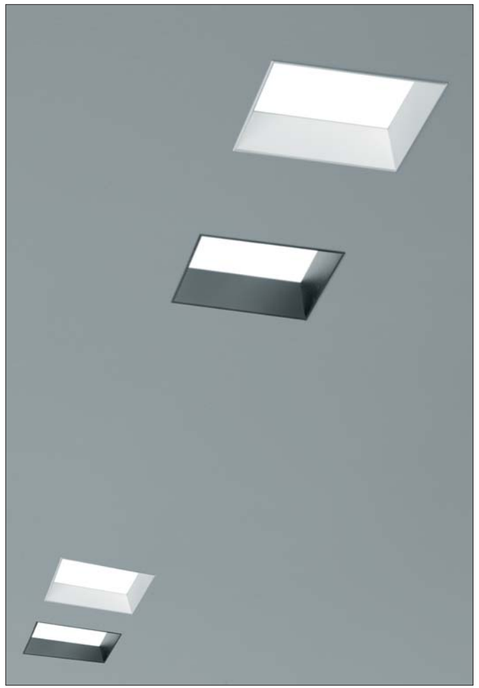



IP20 ©	MC-E=3	CE ▽
700m/A	LED 26,2W	CRI>90
3B16.6 ■ L.□		€ 130,00 ▼

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	3374	104°
3 = 3000 °K	3533	
4 = 4000 °K	3649	

© (m-M)	Driver	
3KIT.700.1L (1-1)	on/off	€ 24,00
3KIT.701.50 (1-1)	DALI - Push - 1...10V	€ 105,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour	€ 95,00
3KIT.900.03 (1-1)	3:00 hours	€ 137,00



Housing for plasterboard

■	**1ZOB.016.01**	Single	€ 49,00

□ Frame

02	●	Black
06	○	White

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Bic trimless (only for plasterboard) ROS



Bic 25

IP44 ©	MC-E=3	CE ▽
220V ÷ 240V	LED 17W	CRI>90
3BC2.6 ■ L.□	on/off	€ 220,00

■ Led color	Nominal lm	Beam spread
3 = 3000 °K	2030	104°

1ZOB.025.01	Single	€ 63,00

Housing for plasterboard

Bic 50

IP44 ©	MC-E=3	CE ▽
220V ÷ 240V	LED 25,6W	CRI>90
3BC5.6 ■ L.□	on/off	€ 268,00
3BC5.9 ■ L.□	with Emergency	€ 420,00

■ Led color	Nominal lm	Beam spread
3 = 3000 °K	3090	104°

1ZOB.050.01	Single	€ 72,00

Housing for plasterboard

Bic 60

IP44 ©	MC-E=3	CE ▽
220V ÷ 240V	LED 34,2W	CRI>90
3BC6.6 ■ L.□	on/off	€ 284,00
3BC6.9 ■ L.□	with Emergency	€ 430,00

■ Led color	Nominal lm	Beam spread
3 = 3000 °K	4120	104°

1ZOB.060.01	Single	€ 78,00

Housing for plasterboard

□ Frame

02	●	Black
06	○	White

Code	L1	L2	H
BC2.63L□	25,1	9,6	14,6
BC5.63L□	50,1	9,6	14,6
BC5.93L□	50,1	9,6	15,9
BC6.63L□	60,1	9,6	14,6
BC6.93L□	60,1	9,6	15,9

Bric

☐	*Frame*	
02	Black	
06	White	
C	Copper	*25 Working Days*
S	Brass	*25 Working Days*

Bric 20

IP20 © MC-E=3 CE ▽

220-240V	8,5W	CRI>90
3BR2.4 ■ L.02	dimm. IGBT - TRIAC	€ 210,00
3BR2.4 ■ L.06	dimm. IGBT - TRIAC	€ 210,00
3BR2.4 ■ L.C	dimm. IGBT - TRIAC	€ 260,00
3BR2.4 ■ L.S	dimm. IGBT - TRIAC	€ 260,00
3BR2F4 ■ L.02	DALI - Push	€ 260,00
3BR2F4 ■ L.06	DALI - Push	€ 260,00
3BR2F4 ■ L.C	DALI - Push	€ 300,00
3BR2F4 ■ L.S	DALI - Push	€ 300,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	1040	92°
3 = 3000 °K	1095	

Bric 34

IP20 © MC-E=3 CE ▽

220-240V	17W	CRI>90
3BR3.4 ■ L.02	on/off	€ 275,00
3BR3.4 ■ L.06	on/off	€ 275,00
3BR3.4 ■ L.C	on/off	€ 340,00
3BR3.4 ■ L.S	on/off	€ 340,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	2080	92°
3 = 3000 °K	2190	

Bric 62

IP20 © MC-E=3 CE ▽

220-240V	34W	CRI>90
3BR6.4 ■ L.02	on/off	€ 445,00
3BR6.4 ■ L.06	on/off	€ 445,00
3BR6.4 ■ L.C	on/off	€ 565,00
3BR6.4 ■ L.S	on/off	€ 565,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	4165	92°
3 = 3000 °K	4385	

micro Box

☐	*Frame*	
02	Black	
04	Brushed steel	
06	White	
08	Corten painted	70%
09	Polished steel	70%

micro Box 7.1

IP20 CE ▽

220-240V	GU10 1x50W	
3B71.210.02		€ 75,00
3B71.210.04		€ 85,00
3B71.210.06		€ 75,00
3B71.210.08		€ 80,00
3B71.210.09		€ 95,00

micro Box 7.1

IP20 © LED 1x8,7W CE ▽

220-240V	3000°K	660 lm	70°	CRI>90
3B71.33S.02	dimm. IGBT		€	134,00
3B71.33S.04	dimm. IGBT		€	145,00
3B71.33S.06	dimm. IGBT		€	134,00
3B71.33S.08	dimm. IGBT		€	134,00
3B71.33S.09	dimm. IGBT		€	161,00



micro Box 7.2

IP20 CE ▽

220-240V	GU10 2x50W	
3B72.210.02		€ 95,00
3B72.210.04		€ 108,00
3B72.210.06		€ 95,00
3B72.210.08		€ 100,00
3B72.210.09		€ 130,00

micro Box 7.2

IP20 © LED 2x8,7W CE ▽

220-240V	3000°K	2x660 lm	70°	CRI>90
3B72.33S.02	dimm. IGBT		€	215,00
3B72.33S.04	dimm. IGBT		€	235,00
3B72.33S.06	dimm. IGBT		€	215,00
3B72.33S.08	dimm. IGBT		€	215,00
3B72.33S.09	dimm. IGBT		€	255,00

Box

Frame

02	Black
04	Brushed steel
06	White
09	Polished steel

Code	L	H	P
BOX**23**	23,0	8,5	7,2
BOX**31**	31,0	8,5	7,2
BOX**50**	50,0	8,5	7,2
BOX**63**	63,0	8,5	7,2
BOX**120**	120,0	8,5	7,2

Box **23** cm

IP20

220-240V	R7S 74,9mm	1x80W
3B23.510.02		€ 132,00
3B23.510.04		€ 144,00
3B23.510.06		€ 132,00
3B23.510.09		€ 160,00

IP40

220-240V	G24Q-2 1x18W	Electronic ballast
3B23.100.02		€ 129,00
3B23.100.04		€ 145,00
3B23.100.06		€ 129,00
3B23.100.09		€ 161,00

IP40 ©

220-240V	MC-E=3	
	LED 2x6,8W	CRI>90
3B23.5■L.02	on/off	€ 200,00
3B23.5■L.04	on/off	€ 210,00
3B23.5■L.06	on/off	€ 200,00
3B23.5■L.09	on/off	€ 220,00

■ Led color	Nominal lm	Beam spread
3 = 3000 °K	2x826	90°

Box **31** cm

IP20

220-240V	R7S 74,9mm	1x120W
3B31.510.02		€ 135,00
3B31.510.04		€ 144,00
3B31.510.06		€ 135,00
3B31.510.09		€ 181,00

IP40

220-240V	G24Q-3 1x26W	Electronic ballast
3B31.100.02		€ 140,00
3B31.100.04		€ 150,00
3B31.100.06		€ 140,00
3B31.100.09		€ 183,00

IP40 ©

220-240V	MC-E=3	
	LED 2x9,0W	CRI>90
3B31.5■L.02	on/off	€ 220,00
3B31.5■L.04	on/off	€ 230,00
3B31.5■L.06	on/off	€ 220,00
3B31.5■L.09	on/off	€ 240,00

IP40 ©

220-240V	MC-E=3	
	LED 2x9,0W	CRI>90
3B31F5■L.02	DALI - Push	€ 260,00
3B31F5■L.04	DALI - Push	€ 270,00
3B31F5■L.06	DALI - Push	€ 260,00
3B31F5■L.09	DALI - Push	€ 280,00

IP40 ©

220-240V	MC-E=3	
	LED 2x9,0W	CRI>90
3B31G5■L.02	1...10V - Push	€ 260,00
3B31G5■L.04	1...10V - Push	€ 270,00
3B31G5■L.06	1...10V - Push	€ 260,00
3B31G5■L.09	1...10V - Push	€ 280,00

■ Led color	Nominal lm	Beam spread
3 = 3000 °K	2x1102	90°

Box **50** cm

IP20

220-240V	R7S 74,9mm	2x80W
3B50.510.02		€ 170,00
3B50.510.04		€ 186,00
3B50.510.06		€ 170,00
3B50.510.09		€ 238,00

IP40

220-240V	2G11 1x36W	Electronic ballast
3B50.100.02		€ 190,00
3B50.100.04		€ 206,00
3B50.100.06		€ 190,00
3B50.100.09		€ 234,00

IP40 ©

220-240V	MC-E=3	
	LED 2x13,5W	CRI>90
3B50.5■L.02	on/off	€ 300,00
3B50.5■L.04	on/off	€ 310,00
3B50.5■L.06	on/off	€ 300,00
3B50.5■L.09	on/off	€ 320,00

IP40 ©

220-240V	MC-E=3	
	LED 2x13,5W	CRI>90
3B50E5■L.02	DALI - Push - 1...10V	€ 350,00
3B50E5■L.04	DALI - Push - 1...10V	€ 360,00
3B50E5■L.06	DALI - Push - 1...10V	€ 350,00
3B50E5■L.09	DALI - Push - 1...10V	€ 370,00

IP40 ©

220-240V	MC-E=3	
	LED 2x13,5W	CRI>90
3B50.9■L.02	with Emergency	€ 450,00
3B50.9■L.04	with Emergency	€ 460,00
3B50.9■L.06	with Emergency	€ 450,00
3B50.9■L.09	with Emergency	€ 470,00

■ Led color	Nominal lm	Beam spread
3 = 3000 °K	2x1653	90°

Box **63** cm

IP20

220-240V	R7S 74,9mm	3x80W
3B63.510.02		€ 210,00
3B63.510.04		€ 241,00
3B63.510.06		€ 210,00
3B63.510.09		€ 289,00

IP40

220-240V	2G11 1x55W	Electronic ballast
3B63.100.02		€ 210,00
3B63.100.04		€ 240,00
3B63.100.06		€ 210,00
3B63.100.09		€ 262,00

IP40 ©

220-240V	MC-E=3	
	LED 2x18,2W	CRI>90
3B63.5■L.02	on/off	€ 330,00
3B63.5■L.04	on/off	€ 340,00
3B63.5■L.06	on/off	€ 330,00
3B63.5■L.09	on/off	€ 350,00

IP40 ©

220-240V	MC-E=3	
	LED 2x18,2W	CRI>90
3B63E5■L.02	DALI - Push - 1...10V	€ 410,00
3B63E5■L.04	DALI - Push - 1...10V	€ 420,00
3B63E5■L.06	DALI - Push - 1...10V	€ 410,00
3B63E5■L.09	DALI - Push - 1...10V	€ 420,00

IP40 ©

220-240V	MC-E=3	
	LED 2x18,2W	CRI>90
3B63.9■L.02	with Emergency	€ 470,00
3B63.9■L.04	with Emergency	€ 480,00
3B63.9■L.06	with Emergency	€ 470,00
3B63.9■L.09	with Emergency	€ 490,00

■ Led color	Nominal lm	Beam spread
3 = 3000 °K	2x2205	90°

Box **120** cm

IP20

220-240V	G5 2x54W	Electronic ballast
3B120.100.02		€ 400,00 ▼
3B120.100.04		€ 439,00 ▼
3B120.100.06		€ 400,00 ▼
3B120.100.09		€ 487,00 ▼

IP40 ©

220-240V	MC-E=3	
	LED 2x63,6W	CRI>90
3B120.4■L.02	on/off	€ 640,00 ▼
3B120.4■L.04	on/off	€ 670,00 ▼
3B120.4■L.06	on/off	€ 640,00 ▼
3B120.4■L.09	on/off	€ 735,00 ▼

■ Led color	Nominal lm	Beam spread
3 = 3000 °K	2x4740	90°

Club C1 mono-color



IP20 ©		CE ▽
220-240V	9W	CRI>90
3C1C.2 ■ L.□	on/off	€ 430,00
■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	1155	60°

□		*Frame*	*Canopy*
02	●	Black	Black
06	○	White	Black
B	●	Blue	Black
G	●	Green	Black
P	●	Rose	Black
R	●	Red	Black

Time delivery: 25 Working Days
Black coaxial power supply cable

Club C1 bi-color

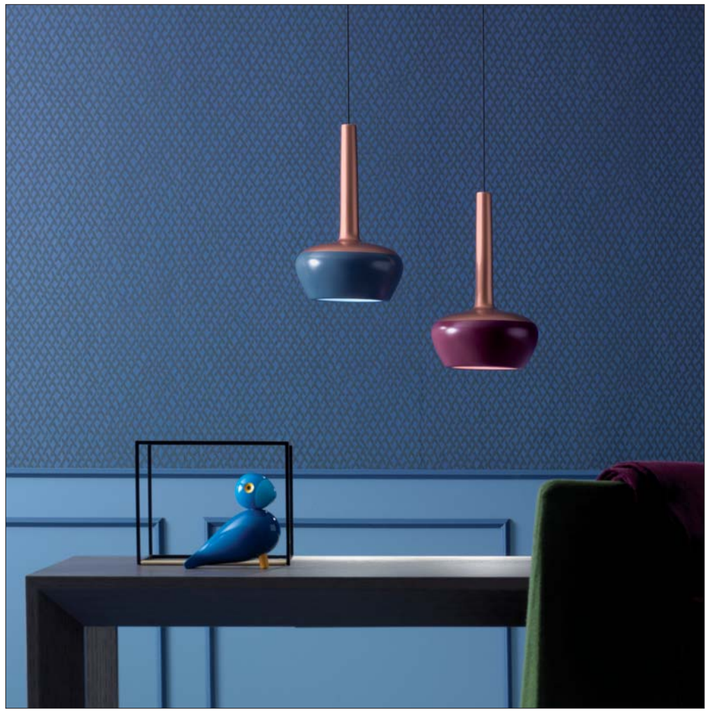



IP20 ©		CE ▽
220-240V	9W	CRI>90
3C1C.2 ■ L.□	on/off	€ 550,00
■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	1155	60°

□	*Up*	*Down*	*Diffuser color*	*Canopy*
CB	●	●	Copper/Blue	Black
CG	●	●	Copper/Green	Black
CP	●	●	Copper/Rose	Black
CR	●	●	Copper/Red	Black

Time delivery: 25 Working Days
Black coaxial power supply cable

Club C2 mono-color



IP20 ©

CE ▽

220-240V	9W	CRI>90
3C2C.2 ■ L.□	on/off	€ 430,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	1155	60°

□		Frame	Canopy
02	●	Black	Black
06	○	White	Black
B	●	Blue	Black
G	●	Green	Black
P	●	Rose	Black
R	●	Red	Black

Time delivery: 25 Working Days
Black coaxial power supply cable

Club C3 mono-color



IP20 ©

CE ▽

220-240V	9W	CRI>90
3C3C.2 ■ L.□	on/off	€ 430,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	1155	60°

□		Frame	Canopy
02	●	Black	Black
06	○	White	Black
B	●	Blue	Black
G	●	Green	Black
P	●	Rose	Black
R	●	Red	Black

Time delivery: 25 Working Days
Black coaxial power supply cable

e-PAD

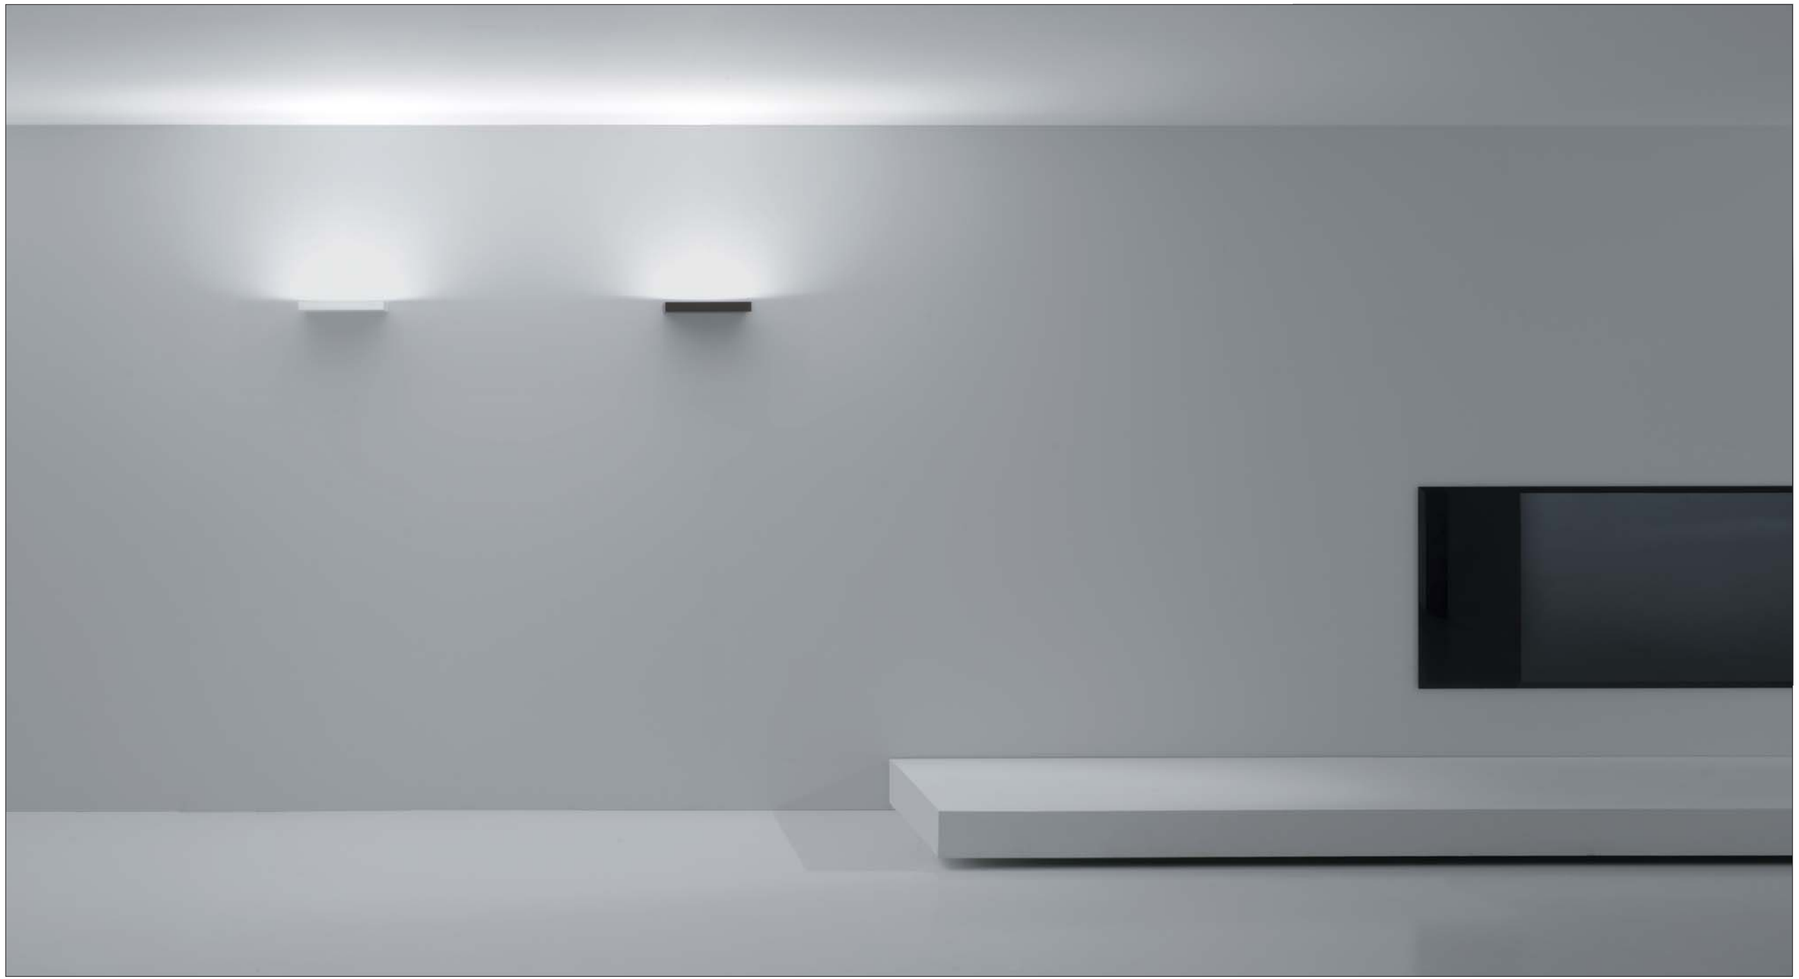



e - PAD 15

IP20 ©	MC-E=3	CE ▽
220-240V	LED 1x18W	CRI>90
3E15.5■L.□	dimm. IGBT - TRIAC	€ 231,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	2494	105°
3 = 3000 °K	2611	
4 = 4000 °K	2697	



e - PAD 30

IP20 ©	MC-E=3	CE ▽
220-240V	LED 2x18W	CRI>90
3E30.5■L.□	dimm. IGBT - TRIAC	€ 332,00
3E30.7■L.□	DALI - Push - 1...10V	€ 390,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	2x2494	105°
3 = 3000 °K	2x2611	
4 = 4000 °K	2x2697	

□ Frame	
02 ●	Black
06 ○	White

J & B



IP20 | CE

220-240V | e27 4W | CRI>80

3JB1.12L.☐ | dimm. IGBT - Triac | **€ 250,00**

Led color 2700 °K | *Nominal lm* 470 | *Beam spread* 360°

☐	*Canopy/Wire*	*Cylinder*	*Diffuser*
02	Black	Black	Black
KSK	Black	Brass Anodized	Black
06	White	White	White
WSW	White	Brass Anodized	White

Available from 15/10/2019



IP20 | CE

220-240V | e27 2x4W | CRI>80

3JB2.12L.☐ | dimm. IGBT - Triac | **€ 650,00**

Led color 2700 °K | *Nominal lm* 2x470 | *Beam spread* 360°

☐	*Canopy/Wire*	*Spacer*	*Cylinder*	*Diffuser*
02	Black	Brass	Black	Black
KSK	Black	Brass	Brass Anodized	Black
06	White	Brass	White	White
WSW	White	Brass	Brass Anodized	White

Available from 15/10/2019

J & J

IP20 | CE

220-240V	e27 4W	CRI>80
3JJ1.12L.□	dimm. IGBT - Triac	€ **320,00**

Led color	*Nominal lm*	*Beam spread*
2700 °K	470	360°

□	*Canopy/Wire*	*Cylinder*	*Glass*
KSF	Black	Brass Anodized	Fumé
WSH	White	Brass Anodized	Champagne

Available from 15/10/2019



IP20 | CE

220-240V	e27 2x4W	CRI>80
3JJ2.12L.□	dimm. IGBT - Triac	€ **830,00**

Led color	*Nominal lm*	*Beam spread*
2700 °K	2x470	360°



□	*Canopy/Wire*	*Spacer*	*Cylinder*	*Diffuser*
KSF	Black	Brass	Brass Anodized	Fumé
WSH	White	Brass	Brass Anodized	Champagne

Available from 15/10/2019

Jo Fly



IP20 Ⓛ		CE ▽
220-240V	e27 6W	CRI>90
3JF1.12L.02	dimm. IGBT - Triac	€ 310,00
3JF1.12L.06	dimm. IGBT - Triac	€ 310,00
Led color	*Nominal lm*	*Beam spread*
2700 °K	540	360°

☐	*Canopy/Wire*	*Diffuser*	*Bulb*
02	● Black	● Black	○ White porcelain
06	○ White	○ White	○ White porcelain

Available from 15/10/2019

Jumbo J07

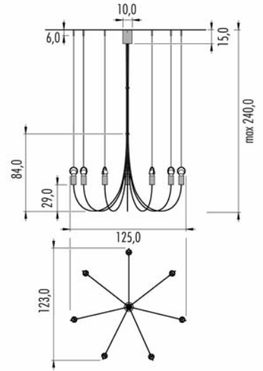

IP20 Ⓛ		CE ▽
220-240V	e27 7x4W	CRI>80
3J07.12L.□	dimm. IGBT - Triac	€ 1.200,00
Led color	*Nominal lm*	*Beam spread*
2700 °K	7x470	360°

□ *Wire*		*Cylinder for Bulb*
02	Black	Black
KS1	Black	Brass Anodized

Time delivery: 25 Working days
Available from 15/10/2019

Jumbo J14

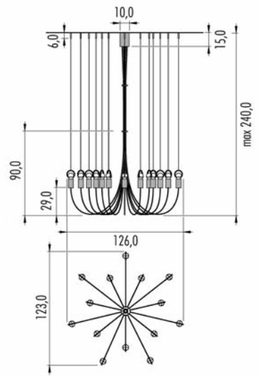

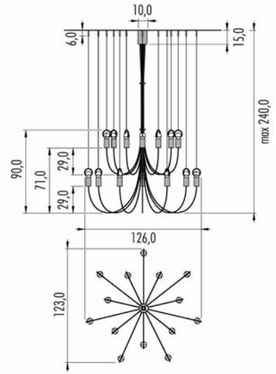

IP20 Ⓛ CE ▽

220-240V	e27 14x4W	CRI>80
3J14.12L.□	dimm. IGBT - Triac	€ 2.200,00
Led color	*Nominal lm*	*Beam spread*
2700 °K	14x470	360°

□ *Wire*		*Cylinder for Bulb*
02	Black	Black
KS1	Black	Brass Anodized

Time delivery: 25 Working days
Available from 15/10/2019

MoMa mono-color *New*



IP20 Ⓛ		CE ▽
220-240V e27	7W CRI>80	dimmable IGBT - Triac
3M40C.12L.06	Ø 40cm	€ **375,00**
3M60C.12L.06	Ø 60cm	€ **420,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	806	163°



IP20 Ⓛ	A+B=410cm	CE ▽
220-240V e27	7W CRI>80	dimmable IGBT - Triac
3M40D.12L.06	Ø 40cm	€ **400,00**
3M60D.12L.06	Ø 60cm	€ **445,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	806	163°

	Frame	*Bulb*	*CUP canopy*	*cable*
06	White	*Mirror Chrome*	White	White



Kit Cable for MoMa composition

1KIT.300.06	White	€ **36,00**

MoMa bi-color



IP20 | CE

220-240V e27	4W CRI>80	dimmable IGBT - Triac
3M40C.12L.□	Ø 40cm	€ **630,00**
3M60C.12L.□	Ø 60cm	€ **695,00**

Led color	*Nominal lm*	*Beam spread*
2700°K	470	163°



IP20 | A+B=410cm | CE

220-240V e27	4W CRI>80	dimmable IGBT - Triac
3M40D.12L.□	Ø 40cm	€ **715,00**
3M60D.12L.□	Ø 60cm	€ **780,00**

Led color	*Nominal lm*	*Beam spread*
2700°K	470	163°



Kit Cable for MoMa composition

1KIT.300.C Copper L. 300cm € **50,00**

□	*Out*	*In*		*CUP*	*cable*	*Bulb*
KC			Black/Copper	Black	Copper	Transparent
WC			White/Copper	White	Copper	Transparent
BC			Blue/Copper	Blue	Copper	Transparent
GC			Green/Copper	Green	Copper	Transparent
PC			Rose/Copper	Rose	Copper	Transparent
RC			Red/Copper	Red	Copper	Transparent

Time delivery: 25 Working Days

MoMa *W bi-color wall/ceiling*



IP20 Ⓛ		CE ▽
220-240V e27	4W CRI>80	dimmable IGBT - Triac
3M40W.12L.□	Ø 40cm	€ **480,00**
3M60W.12L.□	Ø 60cm	€ **540,00**

Led color	*Nominal lm*	*Beam spread*
2700°K	470	163°

□	*Out*	*In*		*Bulb*
KC			Black/Copper	Transparent
WC			White/Copper	Transparent
BC			Blue/Copper	Transparent
GC			Green/Copper	Transparent
PC			Rose/Copper	Transparent
RC			Red/Copper	Transparent

Time delivery: 25 working days

MoMa *L / M bi-color*





IP20 Ⓛ	A+B=300cm	CE ▽
220-240V e27	4W CRI>80	dimmable IGBT - Triac
3M40L.12L.☐	Ø 40cm	€ **910,00**
3M60L.12L.☐	Ø 60cm	€ **970,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	470	163°

IP20 Ⓛ	A=130cm	CE ▽
220-240V e27	4W CRI>80	dimmable IGBT - Triac
3M40M.12L.☐	Ø 40cm	€ **980,00**
3M60M.12L.☐	Ø 60cm	€ **1.040,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	470	163°

☐ *Out*	*In*		*Frame cable*		*Bulb*
KC		Black/Copper	Black	Copper	Transparent
WC		White/Copper	White	Copper	Transparent
BC		Blue/Copper	Blue	Copper	Transparent
GC		Green/Copper	Green	Copper	Transparent
PC		Rose/Copper	Rose	Copper	Transparent
RC		Red/Copper	Red	Copper	Transparent

Time delivery: 25 Working Days

Nelly

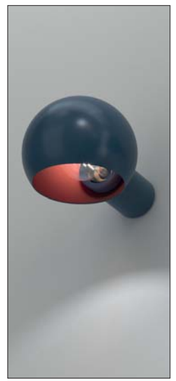
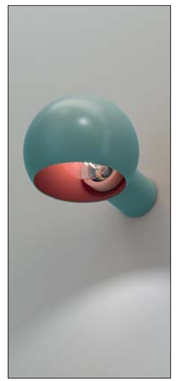
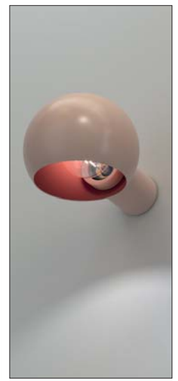



IP20 Ⓛ CE ▽

220-240V	e27 4W	CRI>80
3N01.12L.□	dimm. IGBT - Triac	€ **270,00**

Led color	*Nominal lm*	*Beam spread*
2700°K	470	360°

□	*Out*	*In*		*Bulb*
KC			Black/Copper	Transparent
WC			White/Copper	Transparent
BC			Blue/Copper	Transparent
GC			Green/Copper	Transparent
PC			Rose/Copper	Transparent
RC			Red/Copper	Transparent

Time delivery: 25 Working days
Available from 30/09/2019

Nemo

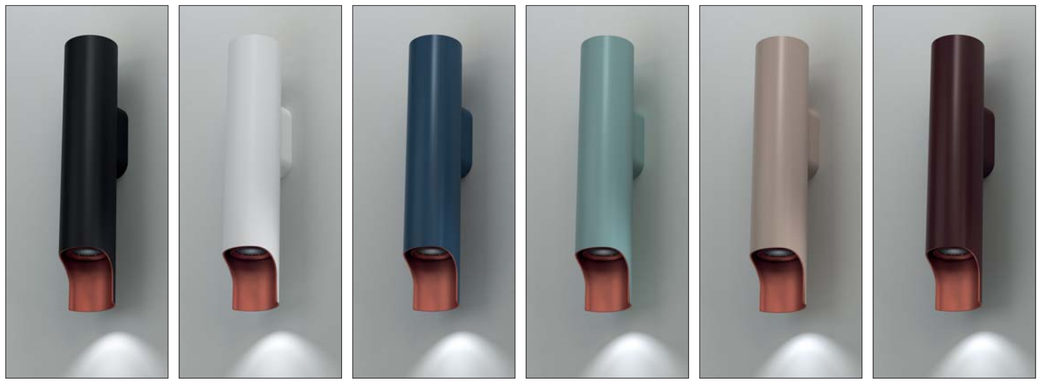



IP20	Flicker < 20%	CE ▽ MC-E=3
220-240V	9,5W CRI>90	dimm. IGBT - TRIAC
4N05.K2S.KC	*With honeycomb*	€ **230,00**
4N05.K2S.WC	*With honeycomb*	€ **230,00**
4N05.K2S.BC	*With honeycomb*	€ **290,00**
4N05.K2S.GC	*With honeycomb*	€ **290,00**
4N05.K2S.PC	*With honeycomb*	€ **290,00**
4N05.K2S.RC	*With honeycomb*	€ **290,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	710	24°

	Out	*In*	
KC			Black/Copper
WC			White/Copper
BC			Blue/Copper
GC			Green/Copper
PC			Rose/Copper
RC			Red/Copper

Time delivery: 25 Working days
Available from 30/09/2019

Pop Bijou *New*



IP40 © **ARC** CE

220-240V | 6W CRI>90 | dimmable IGBT - Triac

3BUA.2■S.□ **€ 350,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	25°
3 = 3000 °K	552	



IP40 © **CUP** CE

220-240V | 6W CRI>90 | on/off

3BUC.2■S.□ **€ 360,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	25°
3 = 3000 °K	552	

□	*Cylinder*	*ARC canopy*	*CUP canopy*
02	Black	White	Black
06	White	White	Black
C1	Copper Anodized	White	Black
S1	Brass Anodized	White	Black

Black coaxial power supply cable. Time delivery: 25 Working Days
Available from 30/09/2019
Collection 2018 available until run out of stock.

Filo System - Pop Bijou *New*

IP40 © CE ▽

500 m/A	6W	CRI>90	
3BU1.2■S.□	12m Cable	€	320,00
3BU2.2■S.□	22m Cable	€	400,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	25°
3 = 3000 °K	552	



ARC Canopy ©	for max 1 diffuser	White painted	
3FL5.ARC.06	IGBT - Triac	€	105,00



CUP Canopy ©	min. 3 max 12 diffusers	Black painted	
3FL5.029.02	on/off	€	360,00
3FL5.C29.02	0/1...10V	€	450,00
3FL5.F29.02	DALI - Push	€	450,00

CUP Canopy ©	for max 2 diffusers	Black painted	
3FL5.CUP.02	IGBT - Triac	€	200,00



CUP Canopy ©	min. 6 max 24 diffusers	Black painted	
3FL5.033.02	On/off	€	550,00
3FL5.E33.02	DALI - Push - 0/1...10V	€	650,00

CUP with Plug-in ©	for max 1 diffuser	Black painted	
3FL5.PIN.02	On/off	€	195,00

Wall - Ceiling Mounting			
1KIT.WM5.02	5 units Black	€	16,00
1KIT.WM8.02	8 units Black	€	25,00

*Example 1 (18+18 art. **Bijou**)= 2 Cup Ø cm. 33*

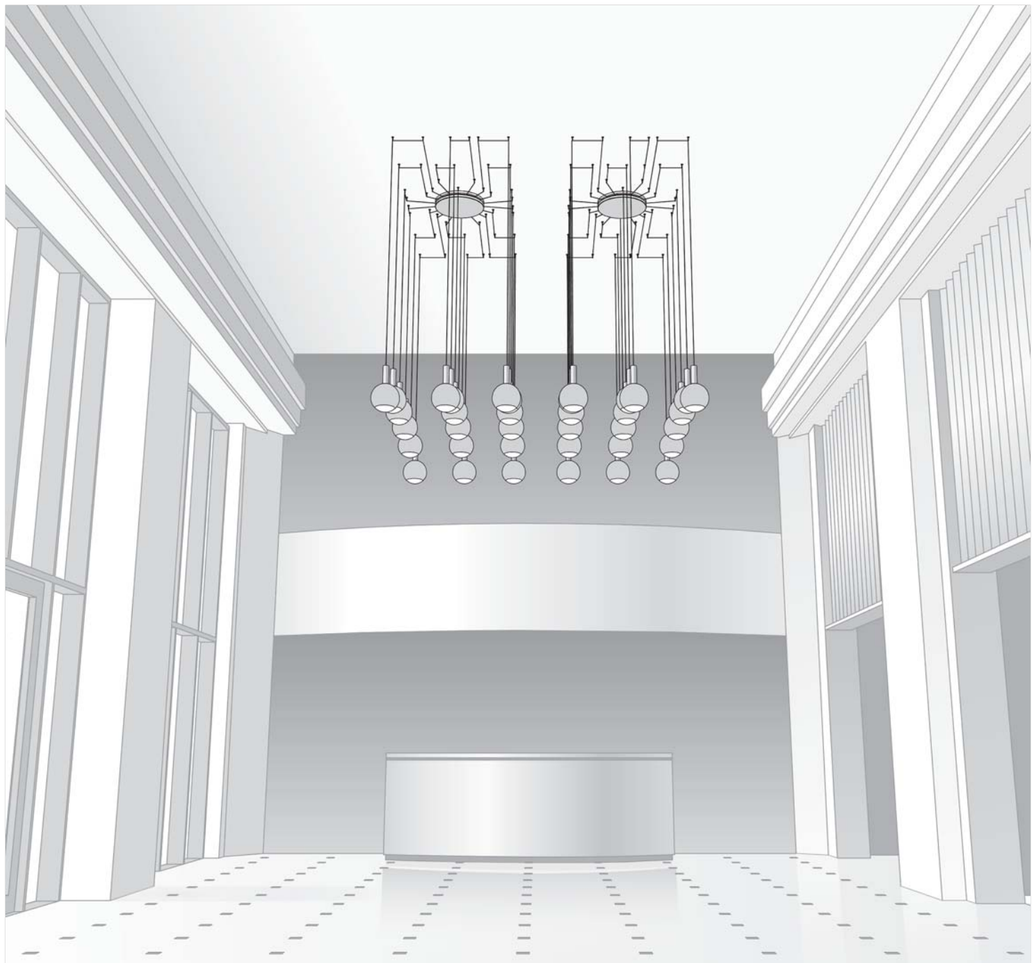

Pop C'est Moi



IP20 © **ARC** CE ▽

220-240V | 6W CRI>90 | dimmable IGBT - Triac

3CMA.2■S.□ **€ 325,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	20°
3 = 3000 °K	552	



IP20 © **CUP** CE ▽

220-240V | 6W CRI>90 | on/off

3CMC.2■S.□ **€ 325,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	20°
3 = 3000 °K	552	

□	*Diffuser color*	*ARC canopy*	*CUP canopy*
02	Black	White	Black
06	White	White	Black
B	Blue	White	Black
C	Copper	White	Black
G	Green	White	Black
P	Rose	White	Black
R	Red	White	Black

Black coaxial power supply cable. Time delivery: 25 Working Days

Filo System - Pop C'est Moi

IP20 ©		CE ▽
500 m/A	6W	CRI>90
3CM1.2■S.□	12m Cable	€ 295,00
3CM2.2■S.□	22m Cable	€ 387,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	528	20°
3 = 3000 °K	552	



ARC Canopy ©	for max 1 diffuser	White painted
3FL5.ARC.06	IGBT - Triac	€ 105,00



CUP Canopy ©	min. 3 max 12 diffusers	Black painted
3FL5.029.02	on/off	€ 360,00
3FL5.C29.02	0/1...10V	€ 450,00
3FL5.F29.02	DALI - Push	€ 450,00

CUP Canopy ©	for max 2 diffusers	Black painted
3FL5.CUP.02	IGBT - Triac	€ 200,00



CUP Canopy ©	min. 6 max 24 diffusers	Black painted
3FL5.033.02	On/off	€ 550,00
3FL5.E33.02	DALI - Push - 0/1...10V	€ 650,00

CUP with Plug-in ©	for max 1 diffuser	Black painted
3FL5.PIN.02	On/off	€ 195,00

Wall - Ceiling Mounting		
1KIT.WM5.02	5 units Black	€ 16,00
1KIT.WM8.02	8 units Black	€ 25,00

*Example 2 (6 art. **C'est Moi**)= Cup Ø cm. 29*

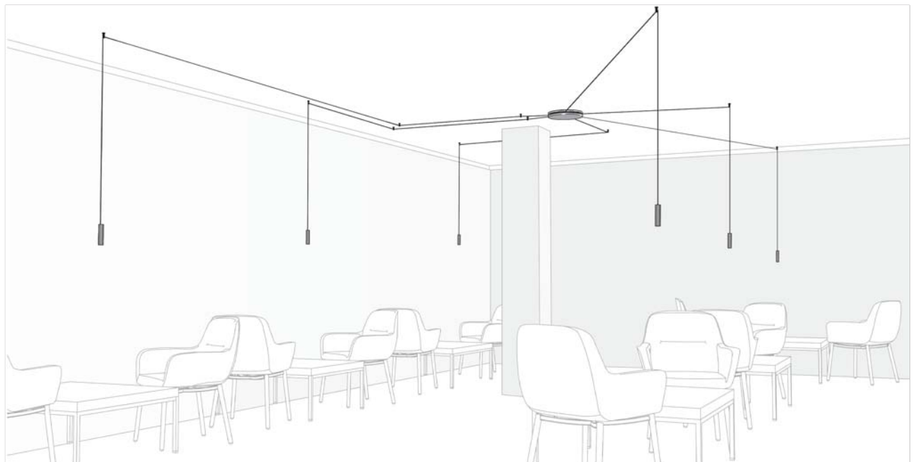

*Example 3 (9 art. **C'est Moi**)= Cup Ø cm. 29*

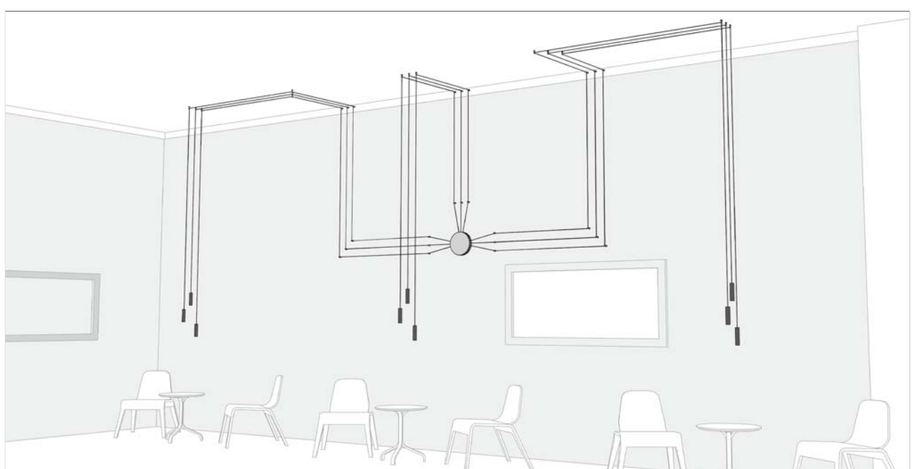

Pop C'est Toi



IP20 © **ARC** CE ▽

220-240V | 6W CRI>90 | dimmable IGBT - Triac

3CTA.2■S.□ — **€ 280,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	20°
3 = 3000 °K	552	



IP20 © **CUP** CE ▽

220-240V | 6W CRI>90 | on/off

3CTC.2■S.□ — **€ 290,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	20°
3 = 3000 °K	552	

□	*Diffuser color*	*ARC canopy*	*CUP canopy*
02	Black	White	Black
06	White	White	Black
C1	Copper Anodized	White	Black
S1	Brass Anodized	White	Black

Black coaxial power supply cable. Time delivery: 25 Working Days
Available from 30/09/2019
Collection 2018 available until run out of stock.

Filo System - Pop C'est Toi

IP20		CE
500 m/A	6W	CRI>90
3CT1.2■S.□	12m Cable	€ 260,00
3CT2.2■S.□	22m Cable	€ 350,00
■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	20°
3 = 3000 °K	552	



ARC Canopy ©	for max 1 diffuser	White painted
3FL5.ARC.06	IGBT - Triac	€ 105,00



CUP Canopy ©	min. 3 max 12 diffusers	Black painted
3FL5.029.02	on/off	€ 360,00
3FL5.C29.02	0/1...10V	€ 450,00
3FL5.F29.02	DALI - Push	€ 450,00

CUP Canopy ©	for max 2 diffusers	Black painted
3FL5.CUP.02	IGBT - Triac	€ 200,00



CUP Canopy ©	min. 6 max 24 diffusers	Black painted
3FL5.033.02	On/off	€ 550,00
3FL5.E33.02	DALI - Push - 0/1...10V	€ 650,00

CUP with Plug-in ©	for max 1 diffuser	Black painted
3FL5.PIN.02	On/off	€ 195,00

Wall - Ceiling Mounting		
1KIT.WM5.02	5 units Black	€ 16,00
1KIT.WM8.02	8 units Black	€ 25,00

*Example 4 (8 art. **C'est Toi**)= Cup Ø cm. 29*

Pop Chérie *New*



IP20 © **ARC** CE ▽

220-240V | 6W CRI>90 | dimmable IGBT - Triac

3CEA.2■S.□ € **300,00**

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	528	20°
3 = 3000 °K	552	



IP20 © **CUP** CE ▽

220-240V | 6W CRI>90 | on/off

3CEC.2■S.□ € **320,00**

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	528	20°
3 = 3000 °K	552	

□	Diffuser color	ARC canopy	CUP canopy
02	Black	White	Black
06	White	White	Black
B	Blue	White	Black
C	Copper	White	Black
G	Green	White	Black
P	Rose	White	Black
R	Red	White	Black

Black coaxial power supply cable. Time delivery: 25 Working Days
Available from 30/09/2019
Collection 2018 available until run out of stock.

Filo System - Pop Chérie *New*

IP40 © CE ▽

500 m/A	6W	CRI>90
3CE1.2■S.□	12m Cable	€ **300,00**
3CE2.2■S.□	22m Cable	€ **390,00**

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	528	20°
3 = 3000 °K	552	



ARC Canopy © for max 1 diffuser White painted

3FL5.ARC.06 IGBT - Triac € **105,00**

CUP Canopy © for max 2 diffusers Black painted

3FL5.CUP.02 IGBT - Triac € **200,00**

CUP with Plug-in © for max 1 diffuser Black painted

3FL5.PIN.02 On/off € **195,00**



CUP Canopy © min. 3 max 12 diffusers Black painted

3FL5.029.02	on/off	€	**360,00**
3FL5.C29.02	0/1...10V	€	**450,00**
3FL5.F29.02	DALI - Push	€	**450,00**



CUP Canopy © min. 6 max 24 diffusers Black painted

3FL5.033.02	On/off	€	**550,00**
3FL5.E33.02	DALI - Push - 0/1...10V	€	**650,00**

Wall - Ceiling Mounting

1KIT.WM5.02	5 units	Black	€	**16,00**
1KIT.WM8.02	8 units	Black	€	**25,00**

Pop Chapeau *New*



IP20 © **ARC** CE ▽

220-240V | 6W CRI>90 | dimmable IGBT - Triac

3CHA.2■S.□ **€ 340,00**

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	528	20°
3 = 3000 °K	552	



IP20 © **CUP** CE ▽

220-240V | 6W CRI>90 | on/off

3CHC.2■S.□ **€ 350,00**

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	528	20°
3 = 3000 °K	552	

□	Up	Down		ARC canopy	CUP canopy
02	●	●	Black/Black	White	Black
06	○	○	White/White	White	Black
C1K	◐	●	Copper Anodized/Black	White	Black
C1W	◐	○	Copper Anodized/White	White	Black
S1K	◐	●	Brass Anodized/Black	White	Black
S1W	◐	○	Brass Anodized/White	White	Black

Black coaxial power supply cable. Time delivery: 25 Working Days
Available from 30/09/2019
Collection 2018 available until run out of stock.

Filo System - Pop Chapeau *New*



IP20		CE
500 m/A	6W	CRI>90
3CH1.2■S.□	12m Cable	€ 320,00
3CH2.2■S.□	22m Cable	€ 400,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	20°
3 = 3000 °K	552	



ARC Canopy ©	for max 1 diffuser	White painted
3FL5.ARC.06	IGBT - Triac	€ 105,00



CUP Canopy ©	min. 3 max 12 diffusers	Black painted
3FL5.029.02	on/off	€ 360,00
3FL5.C29.02	0/1...10V	€ 450,00
3FL5.F29.02	DALI - Push	€ 450,00

CUP Canopy ©	for max 2 diffusers	Black painted
3FL5.CUP.02	IGBT - Triac	€ 200,00



CUP Canopy ©	min. 6 max 24 diffusers	Black painted
3FL5.033.02	On/off	€ 550,00
3FL5.E33.02	DALI - Push - 0/1...10V	€ 650,00

CUP with Plug-in ©	for max 1 diffuser	Black painted
3FL5.PIN.02	On/off	€ 195,00

Wall - Ceiling Mounting		
1KIT.WM5.02	5 units Black	€ 16,00
1KIT.WM8.02	8 units Black	€ 25,00

*Example 5 (6 art. **Chapeau**)= Cup Ø cm. 29*

Pop BonBon



IP20 ©	ARC	CE
220-240V	8W CRI>90	on/off
3BBA.2 ■ S.02		€ 380,00
3BBA.2 ■ S.06		€ 380,00
3BBA.2 ■ S.BC		€ 425,00
3BBA.2 ■ S.GC		€ 425,00
3BBA.2 ■ S.PC		€ 425,00
3BBA.2 ■ S.CR		€ 425,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	893	22°
3 = 3000 °K	939	

IP20 ©	CUP	CE
220-240V	8W CRI>90	on/off
3BBC.2 ■ S.02		€ 380,00
3BBC.2 ■ S.06		€ 380,00
3BBC.2 ■ S.BC		€ 425,00
3BBC.2 ■ S.GC		€ 425,00
3BBC.2 ■ S.PC		€ 425,00
3BBC.2 ■ S.CR		€ 425,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	893	22°
3 = 3000 °K	939	

□	Up	Down	ARC canopy	CUP canopy
02	●	●	White	Black
06	○	○	White	Black
BC	●	●	White	Black
GC	●	●	White	Black
PC	●	●	White	Black
CR	●	●	White	Black

Black coaxial power supply cable. Time delivery: 25 Working Days

Filo System - Pop BonBon

IP20 ©		CE
250 m/A	8W	CRI>90
3BB1.2 ■ S.02	12m Cable	€ 350,00
3BB1.2 ■ S.06	12m Cable	€ 350,00
3BB1.2 ■ S.BC	12m Cable	€ 396,00
3BB1.2 ■ S.GC	12m Cable	€ 396,00
3BB1.2 ■ S.PC	12m Cable	€ 396,00
3BB1.2 ■ S.CR	12m Cable	€ 396,00
3BB2.2 ■ S.02	22m Cable	€ 436,00
3BB2.2 ■ S.06	22m Cable	€ 436,00
3BB2.2 ■ S.BC	22m Cable	€ 486,00
3BB2.2 ■ S.GC	22m Cable	€ 486,00
3BB2.2 ■ S.PC	22m Cable	€ 486,00
3BB2.2 ■ S.CR	22m Cable	€ 486,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	893	22°
3 = 3000 °K	939	



ARC Canopy ©	for max 1 diffuser	White painted
3FL2.ARC.06	On/off	€ 105,00

CUP Canopy ©	for max 2 diffusers	Black painted
3FL2.CUP.02	On/off	€ 200,00

CUP Canopy ©	for max 1 diffuser	Black painted
3FL2.PIN.02	On/off	€ 195,00

Wall - Ceiling Mounting		
1KIT.WM5.02	5 units Black	€ 16,00
1KIT.WM8.02	8 units Black	€ 25,00



CUP Canopy ©	min. 3 max 3 diffusers	Black painted
3FL2.029.02	On/off	€ 380,00
3FL2.F29.02	DALI - Push	€ 450,00



CUP Canopy ©	min. 6 max 6 diffusers	Black painted
3FL2.033.02	On/off	€ 550,00

CUP Canopy ©	min. 3 max 9 diffusers	Black painted
3FL2.E33.02	DALI - Push - 0/1...10V	€ 650,00

Pop Petit



IP54 © **ARC** CE ▽

220-240V 2,3W CRI>90 on/off

3PTA.2■L.□ **€ 330,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	237	60°
3 = 3000 °K	256	

IP20 © **CUP** CE ▽

220-240V 2,3W CRI>90 on/off

3PTC.2■L.□ **€ 330,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	237	60°
3 = 3000 °K	256	

□	*Diffuser color*	*ARC canopy*	*CUP canopy*
02	Black	White	Black
06	White	White	Black
B	Blue	White	Black
C	Copper	White	Black
G	Green	White	Black
P	Rose	White	Black
R	Red	White	Black

Black coaxial power supply cable. Time delivery: 25 Working Days

Filo System - Pop Petit

IP40 ©		CE ▽
700 m/A	6W	CRI>90
3PT1.2■L.□	12m Cable	€ 300,00
3PT2.2■L.□	22m Cable	€ 380,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	60°
3 = 3000 °K	552	



ARC Canopy ©	for max 1 diffuser	White painted
3FL7.ARC.06	IGBT - Triac	€ 105,00



CUP Canopy ©	min. 3 max 12 diffusers	Black painted
3FL7.029.02	on/off	€ 360,00
3FL7.F29.02	DALI - Push	€ 450,00

CUP Canopy ©	for max 2 diffusers	Black painted
3FL7.CUP.02	IGBT - Triac	€ 200,00



CUP Canopy ©	min. 6 max 24 diffusers	Black painted
3FL7.033.02	On/off	€ 550,00

CUP Canopy ©	min. 3 max 24 diffusers	Black painted
3FL7.E33.02	DALI - Push - 0/1...10V	€ 650,00

CUP with Plug-in ©	for max 1 diffuser	Black painted
3FL7.PIN.02	On/off	€ 195,00

Wall - Ceiling Mounting		
1KIT.WM5.02	5 units Black	€ 16,00
1KIT.WM8.02	8 units Black	€ 25,00

*Example 6 (24 art. **Petit**)= Cup Ø cm. 33*

Pop 00 Ø 3,0 trimless *(for plasterboard and brickwork)*

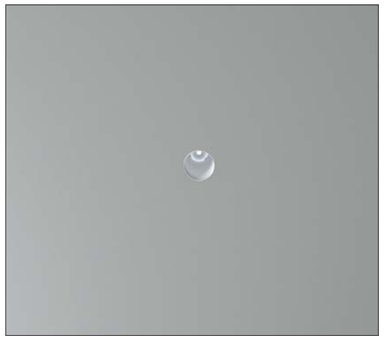

IP40 — MC-E=3 — CE

500m/A — LED 6W — CRI>90

3P00.3 ■ M. □ — € 125,00

IP54 — MC-E=3 — CE

500m/A — LED 6W — CRI>90

3P00.3 ■ M9. □ — € 135,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	17°
3 = 3000 °K	552	

© (m-M)	*Driver ONLY in remote installation*	
3KIT.500.15 (1-1)	on/off	€ 27,00
3KIT.501.50 (1-7)	DALI - Push - 1...10V	€ 105,00
3KIT.502.20 (1-3)	DALI	€ 59,00
3KIT.503.20 (1-3)	Push - 1...10	€ 59,00
3KIT.504.10 (1-1)	IGBT - TRIAC	€ 32,00

Housing for plasterboard

- **1Z00.030.01** — Ø 4,0cm — € 20,00

Housing for brickwork

- **1M00.030.01** — € 54,00

□ *Frame*

02	●	Black
06	○	White
C1	◐	Copper Anodized
S1	◐	Brass Anodized

Finishes C1 and S1 are available from 30/09/2019

*(**m-M**) = min. Led unit - Max Led unit.*
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 00 **NaNo** Ø 3,0 trimless *(only for plasterboard)*

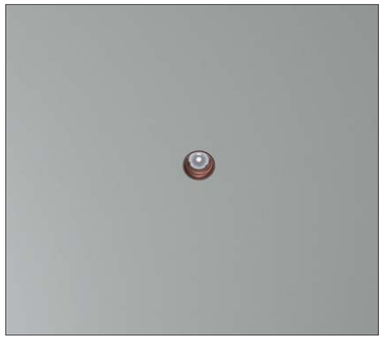

IP40 — MC-E=3 — CE

500m/A — LED 6W — CRI>90

3N00.3 ■ M. □ — € 80,00

IP54 — MC-E=3 — CE

500m/A — LED 6W — CRI>90

3N00.3 ■ M9. □ — € 90,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	25°
3 = 3000 °K	552	

© (m-M)	*Driver ONLY in remote installation*	
3KIT.500.15 (1-1)	on/off	€ 27,00
3KIT.501.50 (1-7)	DALI - Push - 1...10V	€ 105,00
3KIT.502.20 (1-3)	DALI	€ 59,00
3KIT.503.20 (1-3)	Push - 1...10	€ 59,00
3KIT.504.10 (1-1)	IGBT - TRIAC	€ 32,00

Pop N00 **NaNo**: housing for plasterboard

- **1N00.030.01** — Ø 4,0cm — € 20,00

□ *Frame*

02	●	Black
06	○	White
C1	◐	Copper Anodized
S1	◐	Brass Anodized

Available from 30/09/2019

*(**m-M**) = min. Led unit - Max Led unit.*
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop 00 Ø 3,0 with trim (for plasterboard and brickwork)

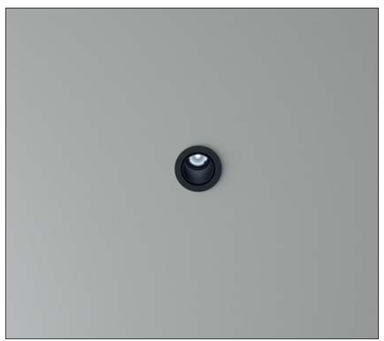



IP40 | MC-E=3 | CE

500m/A | LED 6W | CRI>90

3E00.3 M.□ € 120,00



IP54 | MC-E=3 | CE

500m/A | LED 6W | CRI>90

3E00.3 M9.□ € 130,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	17°
3 = 3000 °K	552	

© (m-M) — *Driver ONLY in remote installation*

3KIT.500.15 (1-1)	on/off	€	27,00
3KIT.501.50 (1-7)	DALI - Push - 1...10V	€	105,00
3KIT.502.20 (1-3)	DALI	€	59,00
3KIT.503.20 (1-3)	Push - 1...10	€	59,00
3KIT.504.10 (1-1)	IGBT - TRIAC	€	32,00



Housing for brickwork

● **1E00.030.01** € 19,00

□ *Frame*

- **02** Black
- **06** White
- **C1** Copper Anodized
- **S1** Brass Anodized

Available from 30/09/2019

*(**m-M**) = min. Led unit - Max Led unit.*
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop 00 NaNo Ø 3,0 with trim (for plasterboard and brickwork)



IP40 | MC-E=3 | CE

500m/A | LED 6W | CRI>90

3F00.3 M.□ € 95,00

IP54 | MC-E=3 | CE

500m/A | LED 6W | CRI>90

3F00.3 M9.□ € 105,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	528	25°
3 = 3000 °K	552	

© (m-M) — *Driver ONLY in remote installation*

3KIT.500.15 (1-1)	on/off	€	27,00
3KIT.501.50 (1-7)	DALI - Push - 1...10V	€	105,00
3KIT.502.20 (1-3)	DALI	€	59,00
3KIT.503.20 (1-3)	Push - 1...10	€	59,00
3KIT.504.10 (1-1)	IGBT - TRIAC	€	32,00



Housing for brickwork

● **1E00.030.01** € 19,00

□ *Frame*

- **02** Black
- **06** White
- **C1** Copper Anodized
- **S1** Brass Anodized

Available from 30/09/2019

*(**m-M**) = min. Led unit - Max Led unit.*
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 01 Ø 4,0 trimless *(only for plasterboard)*

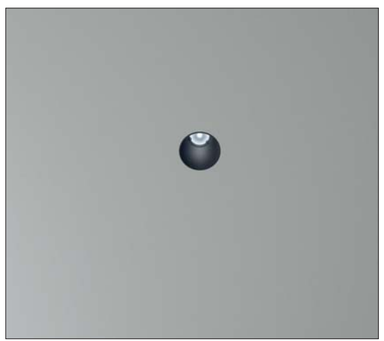

IP40 — 12V

3P01.200.☐	GU4 max 35W	€	35,00
3KIT.201.050 *Dimmable gear: IGBT*	*max 50VA*	€	32,00

IP40 — MC-E=3

500m/A	LED 6W	CRI>90	
3P01.2■S.☐		€	102,00

IP54 — MC-E=3

500m/A	LED 6W	CRI>90	
3P01.2■S9.☐		€	135,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700°K	528	22°
3 = 3000°K	552	

	© (m-M)	Driver		
3KIT.500.15	(1-1)	on/off	€	27,00
3KIT.501.50	(1-7)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.502.20	(1-3)	DALI *Remote installation*	€	59,00
3KIT.503.20	(1-3)	Push - 1...10 *Remote installation*	€	59,00
3KIT.504.10	(1-1)	IGBT - TRIAC *Remote installation*	€	32,00

☐	*Frame*
02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Finishes C1 and S1 are available from 30/09/2019

	Pop P01	P	P1
3P01.200.☐	led IP40	9,1	3,9
3P01.2■S.☐	led IP40	13,2	3,9
3P01.2■S9.☐	led IP54	14,0	3,9

Housing for plasterboard

●	1Z00.040.01	Ø 5,1cm	€	17,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop 01 Ø 4,0 with trim *(for plasterboard and brickwork)*

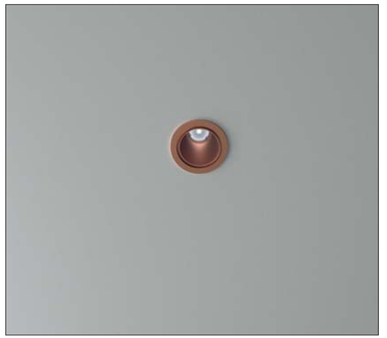



IP40 — 12V

3E01.200.☐	GU4 max 35W	€	50,00
3KIT.201.050 *Dimmable gear: IGBT*	*max 50VA*	€	32,00

IP40 — MC-E=3

500m/A	LED 6W	CRI>90	
3E01.2■S.☐		€	100,00

IP54 — MC-E=3

500m/A	LED 6W	CRI>90	
3E01.2■S9.☐		€	130,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700°K	528	22°
3 = 3000°K	552	

	© (m-M)	Driver		
3KIT.500.15	(1-1)	on/off	€	27,00
3KIT.501.50	(1-7)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.502.20	(1-3)	DALI *Remote installation*	€	59,00
3KIT.503.20	(1-3)	Push - 1...10 *Remote installation*	€	59,00
3KIT.504.10	(1-1)	IGBT - TRIAC *Remote installation*	€	32,00

☐	*Frame*
02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

	Pop E01	P	P1
3E01.200.☐	led IP40	9,1	3,9
3E01.2■S.☐	led IP40	13,2	3,9
3E01.2■S9.☐	led IP54	14,0	3,9



Housing for brickwork

●	1E00.040.01		€	20,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 01 *Ø 5,5 trimless (for plasterboard and brickwork)*

	Pop P01	P	P1
3P01.210.☐	GU10	13,2	4,4
3P01.211.☐	GU10 led	—	4,4
4P01.211.☐	GU10 led + honeycomb	—	4,4
3P01.220.☐	GU5.3	11,6	4,4
4P01.220.☐	GU5.3 led + honeycomb	—	4,4
3P01.2209.☐	GU5.3 IP44	13,0	3,4
4P01.2209.☐	GU5.3 IP44 led + honeycomb	—	3,4
3P01.K■S.☐	led 9,5W IP40	13,8	4,4
4P01.K■S.☐	led 9,5W IP40 + honeycomb	14,3	4,4

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Finishes C1 and S1 are available from 30/09/2019

IP20 Ø — CE

220V ÷ 240V

3P01.210.☐	GU10 max 50W	€	46,50
3P01.211.☐	GU10 led	€	46,50
4P01.211.☐	GU10 led	€	52,50

With honeycomb

IP20 Ø — CE

12V

3P01.220.☐	GU5.3 max 50W	€	36,00
4P01.220.☐	GU5.3 led	€	42,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP44 Ø — CE

12V

3P01.2209.☐	GU5.3 max 35W	€	67,00
4P01.2209.☐	GU5.3 led	€	73,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP40 Flicker < 20% — CE

220V ÷ 240V — LED 9,5W — CRI>90

3P01.K■S.☐	dimm IGBT - TRIAC	€	69,00
4P01.K■S.☐	dimm IGBT - TRIAC	€	75,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	710	24°
3 = 3000°K	760	

Housing for plasterboard Ø 6,5cm

●	1Z00.055.01	Single	€	18,00
●●	1Z00.055.2L	Double	€	33,00
●●●	1Z00.055.3L	Triple	€	49,00

Housing for brickwork

●	1M00.055.01		€	90,00

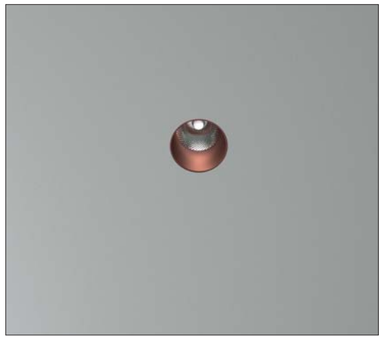

	Pop P01	P	P1
3P01.3■◤◥.☐	led IP40	13,8	4,4
4P01.3■◤◥.☐	led IP40 + honeycomb	14,3	4,4
3P01.3■◤◥9.☐	led IP54	15,2	3,4
4P01.3■◤◥9.☐	led IP54 + honeycomb	15,7	3,4
3P01.3W◤◥.☐	led IP40	10,7	4,4
4P01.3W◤◥.☐	led IP40 + honeycomb	11,2	4,4
3P01.3W◤◥9.☐	led IP54	11,3	3,4
4P01.3W◤◥9.☐	led IP54 + honeycomb	11,8	3,4

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

IP40 © — DimToWarm — CE

220V ÷ 240V — LED 6W — CRI 95 — *Driver included*

3P01.3W◤◥.☐	dimm IGBT - TRIAC	€	140,00
4P01.3W◤◥.☐	dimm IGBT - TRIAC	€	146,00

With honeycomb

IP54 © — DimToWarm — CE

220V ÷ 240V — LED 6W — CRI 95 — *Driver included*

3P01.3W◤◥9.☐	dimm IGBT - TRIAC	€	155,00
4P01.3W◤◥9.☐	dimm IGBT - TRIAC	€	161,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K min. 1800°K	max 445 lm min. 10 lm	M = 30° S = 18°

IP40 © — MC-E=3 — CE

350m/A — LED 11W — CRI>90

3P01.3■◤◥.☐		€	120,00
4P01.3■◤◥.☐		€	126,00

With honeycomb

IP54 © — MC-E=3 — CE

350m/A — LED 11W — CRI>90

3P01.3■◤◥9.☐		€	135,00
4P01.3■◤◥9.☐		€	141,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	1195	S = 22°
3 = 3000°K	1257	T = 12°
4 = 4000°K	1313	

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour	€	95,00
3KIT.900.03 (1-1)	3:00 hours	€	137,00

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Finishes C1 and S1 are available from 30/09/2019

Housing for plasterboard Ø 6,5cm

●	1Z00.055.01	Single	€	18,00
●●	1Z00.055.2L	Double	€	33,00
●●●	1Z00.055.3L	Triple	€	49,00

Housing for brickwork

●	1M00.055.01		€	90,00

Pop 01 **NaNo** Ø 5,5 *(for plasterboard and brickwork)*

	Pop N01	P	P1
3N01.210.☐	GU10	9,5	0,7
3N01.211.☐	GU10 led	—	0,7
4N01.211.☐	GU10 led + honeycomb	—	0,7
3N01.220.☐	GU5.3	7,9	0,7
4N01.220.☐	GU5.3 led + honeycomb	—	0,7
3N01.2209.☐	GU5.3 IP44	8,8	0,7
4N01.2209.☐	GU5.3 IP44 led + honeycomb	—	0,7
3N01.K■S.☐	led 9,5W IP40	10,5	0,7
4N01.K■S.☐	led 9,5W IP40 + honeycomb	11,0	0,7

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

IP20 CE

220V ÷ 240V

3N01.210.☐	GU10 max 50W	€	44,00
3N01.211.☐	GU10 led	€	44,00
4N01.211.☐	GU10 led	€	50,00

With honeycomb

IP20 CE

12V

3N01.220.☐	GU5.3 max 50W	€	36,00
4N01.220.☐	GU5.3 led	€	42,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP44 CE

12V

3N01.2209.☐	GU5.3 max 35W	€	58,00
4N01.2209.☐	GU5.3 led	€	64,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP40 Flicker < 20% CE

220V ÷ 240V — LED 9,5W — CRI>90

3N01.K■S.☐	dimm IGBT - TRIAC	€	69,00
4N01.K■S.☐	dimm IGBT - TRIAC	€	75,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	710	24°
3 = 3000 °K	760	

Housing for plasterboard Ø 6,5cm

●	1Z00.055.01	Single	€	18,00
●●	1Z00.055.2L	Double	€	33,00
●●●	1Z00.055.3L	Triple	€	49,00

Housing for brickwork

●	1M00.055.01		€	90,00

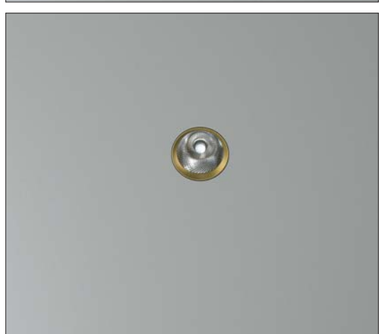

IP40 © DimToWarm CE — 220V ÷ 240V — LED 6W — CRI 95 — *Driver included*

3N01.3W◪◹.☐	dimm IGBT - TRIAC	€	120,00
4N01.3W◪◹.☐	dimm IGBT - TRIAC	€	126,00

With honeycomb

IP54 © DimToWarm CE — 220V ÷ 240V — LED 6W — CRI 95 — *Driver included*

3N01.3W◪◹9.☐	dimm IGBT - TRIAC	€	145,00
4N01.3W◪◹9.☐	dimm IGBT - TRIAC	€	151,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K min. 1800°K	max 445 lm min. 10 lm	M = 30° S = 18°

IP40 © MC-E=3 CE — 250m/A — LED 8W — CRI>90

3N01.3■◪◹.☐		€	100,00
4N01.3■◪◹.☐		€	106,00

With honeycomb

IP54 © MC-E=3 CE — 250m/A — LED 8W — CRI>90

3N01.3■◪◹9.☐		€	115,00
4N01.3■◪◹9.☐		€	121,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	779	M = 38°
3 = 3000 °K	819	S = 22°
4 = 4000 °K	855	T = 12°

© (m-M) Driver

3KIT.250.1L	(1-1)	on/off	€	21,00
3KIT.251.28	(1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.252.12	(1-1)	DALI	€	59,00
3KIT.253.13	(1-1)	Push - 1...10V	€	59,00
3KIT.254.12	(1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01	(1-1)	1:00 hour	€	95,00
3KIT.900.03	(1-1)	3:00 hours	€	137,00

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

	Pop N01	P	P1
3N01.3■◪◹.☐	led IP40	7,1	0,7
4N01.3■◪◹.☐	led IP40 + honeycomb	7,6	0,7
3N01.3■◪◹9.☐	led IP54	8,0	0,7
4N01.3■◪◹9.☐	led IP54 + honeycomb	8,5	0,7
3N01.3W◪◹.☐	led IP40	6,9	0,7
4N01.3W◪◹.☐	led IP40 + honeycomb	7,4	0,7
3N01.3W◪◹9.☐	led IP54	7,8	0,7
4N01.3W◪◹9.☐	led IP54 + honeycomb	8,3	0,7

Housing for plasterboard Ø 6,5cm

●	1Z00.055.01	Single	€	18,00
●●	1Z00.055.2L	Double	€	33,00
●●●	1Z00.055.3L	Triple	€	49,00

Housing for brickwork

●	1M00.055.01		€	90,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop 01 Ø 5,5 with trim *(for plasterboard and brickwork)*

	Pop E01	P	P1
3E01.210.☐	GU10	13,2	4,4
3E01.211.☐	GU10 led	—	4,4
4E01.211.☐	GU10 led + honeycomb	—	4,4
3E01.220.☐	GU5.3	11,6	4,4
4E01.220.☐	GU5.3 led + honeycomb	—	4,4
3E01.2209.☐	GU5.3 IP44	13,0	3,4
4E01.2209.☐	GU5.3 IP44 led + honeycomb	—	3,4
3E01.K■S.☐	led 9,5W IP40	13,8	4,4
4E01.K■S.☐	led 9,5W IP40 + honeycomb	14,3	4,4

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019



IP20 Ⓔ CE ▽ ▢

220V ÷ 240V

3E01.210.☐	GU10 max 50W	€	60,00
3E01.211.☐	GU10 led	€	60,00
4E01.211.☐	GU10 led	€	66,00

With honeycomb

IP20 Ⓔ Ⓩ CE ▽

12V

3E01.220.☐	GU5.3 max 50W	€	52,00
4E01.220.☐	GU5.3 led	€	58,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP44 Ⓔ Ⓩ CE ▽

12V

3E01.2209.☐	GU5.3 max 35W	€	75,00
4E01.2209.☐	GU5.3 led	€	83,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP40 Flicker < 20% CE ▽ ▢

220V ÷ 240V LED 9,5W CRI>90

3E01.K■S.☐	dimm IGBT - TRIAC	€	82,00
4E01.K■S.☐	dimm IGBT - TRIAC	€	88,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	710	24°
3 = 3000 °K	760	



Housing for brickwork

●	1E00.055.01	€	20,00

	Pop E01	P	P1
3E01.3■◤◥.☐	led IP40	13,8	4,4
4E01.3■◤◥.☐	led IP40 + honeycomb	14,3	4,4
3E01.3■◤◥9.☐	led IP54	15,2	3,4
4E01.3■◤◥9.☐	led IP54 + honeycomb	15,7	3,4
3E01.3W◤◥.☐	led IP40	10,7	4,4
4E01.3W◤◥.☐	led IP40 + honeycomb	11,2	4,4
3E01.3W◤◥9.☐	led IP54	11,3	3,4
4E01.3W◤◥9.☐	led IP54 + honeycomb	11,8	3,4

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

IP40 Ⓒ DimToWarm CE ▽

220V ÷ 240V LED 6W CRI 95 *Driver included*

3E01.3W◤◥.☐	dimm IGBT - TRIAC	€	145,00
4E01.3W◤◥.☐	dimm IGBT - TRIAC	€	151,00

With honeycomb

IP54 Ⓒ DimToWarm CE ▽

220V ÷ 240V LED 6W CRI 95 *Driver included*

3E01.3W◤◥9.☐	dimm IGBT - TRIAC	€	161,00
4E01.3W◤◥9.☐	dimm IGBT - TRIAC	€	167,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K	max 445 lm	M = 30°
min. 1800°K	min. 10 lm	S = 18°

IP40 Ⓒ MC-E=3 CE ▽

350m/A LED 11W CRI>90

3E01.3■◤◥.☐		€	90,00
4E01.3■◤◥.☐		€	96,00

With honeycomb

IP54 Ⓒ MC-E=3 CE ▽

350m/A LED 11W CRI>90

3E01.3■◤◥9.☐		€	105,00
4E01.3■◤◥9.☐		€	111,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1195	S = 22°
3 = 3000 °K	1257	T = 12°
4 = 4000 °K	1313	

Ⓒ (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour	€	95,00
3KIT.900.03 (1-1)	3:00 hours	€	137,00

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019





Housing for brickwork

●	1E00.055.01	€	20,00

easy Pop 01 **NaNo** Ø 5,5 with trim *(for plasterboard and brickwork)*

	Pop F01	P	P1
3F01.210.☐	GU10	9,5	0,7
3F01.211.☐	GU10 led	—	0,7
4F01.211.☐	GU10 led + honeycomb	—	0,7
3F01.220.☐	GU5.3	7,9	0,7
4F01.220.☐	GU5.3 led + honeycomb	—	0,7
3F01.2209.☐	GU5.3 IP44	8,8	0,7
4F01.2209.☐	GU5.3 IP44 led + honeycomb	—	0,7
3F01.K■S.☐	led 9,5W IP40	10,5	0,7
4F01.K■S.☐	led 9,5W IP40 + honeycomb	11,0	0,7

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019



IP20 Ⓔ CE ▽ ▢

220V ÷ 240V

3F01.210.☐	GU10 max 50W	€	60,00
3F01.211.☐	GU10 led	€	60,00
4F01.211.☐	GU10 led	€	66,00

With honeycomb

IP20 Ⓔ Ⓩ CE ▽ ◈

12V

3F01.220.☐	GU5.3 max 50W	€	52,00
4F01.220.☐	GU5.3 led	€	58,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP44 Ⓔ Ⓩ CE ▽ ◈

12V

3F01.2209.☐	GU5.3 max 35W	€	75,00
4F01.2209.☐	GU5.3 led	€	83,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP40 Flicker < 20% CE ▽ ▢

220V ÷ 240V — LED 9,5W — CRI>90

3F01.K■S.☐	dimm IGBT - TRIAC	€	82,00
4F01.K■S.☐	dimm IGBT - TRIAC	€	88,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	710	24°
3 = 3000 °K	760	



Housing for brickwork

●	1E00.055.01	€	20,00

	Pop F01	P	P1
3F01.■■.☐	led IP40	7,1	0,7
4F01.■■.☐	led IP40 + honeycomb	7,6	0,7
3F01.■■9.☐	led IP54	8,0	0,7
4F01.■■9.☐	led IP54 + honeycomb	8,5	0,7
3F01.3W■■.☐	led IP40	6,9	0,7
4F01.3W■■.☐	led IP40 + honeycomb	7,4	0,7
3F01.3W■■9.☐	led IP54	7,8	0,7
4F01.3W■■9.☐	led IP54 + honeycomb	8,3	0,7

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

IP40 Ⓒ DimToWarm CE ▽ ◈

220V ÷ 240V — LED 6W — CRI 95 — *Driver included*

3F01.3W■■.☐	dimm IGBT - TRIAC	€	140,00
4F01.3W■■.☐	dimm IGBT - TRIAC	€	146,00

With honeycomb

IP54 Ⓒ DimToWarm CE ▽ ◈

220V ÷ 240V — LED 6W — CRI 95 — *Driver included*

3F01.3W■■9.☐	dimm IGBT - TRIAC	€	161,00
4F01.3W■■9.☐	dimm IGBT - TRIAC	€	167,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K min. 1800°K	max 445 lm min. 10 lm	M = 30° S = 18°

IP40 Ⓔ MC-E=3 CE ▽ ◈

250m/A — LED 8W — CRI>90

3F01.3■■.☐		€	85,00
4F01.3■■.☐		€	91,00

With honeycomb

IP54 Ⓔ MC-E=3 CE ▽ ◈

250m/A — LED 8W — CRI>90

3F01.3■■9.☐		€	105,00
4F01.3■■9.☐		€	111,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	779	M = 38°
3 = 3000 °K	819	S = 22°
4 = 4000 °K	855	T = 12°

	Ⓒ (m-M)	Driver		
3KIT.250.1L	(1-1)	on/off	€	21,00
3KIT.251.28	(1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.252.12	(1-1)	DALI	€	59,00
3KIT.253.13	(1-1)	Push - 1...10V	€	59,00
3KIT.254.12	(1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01	(1-1)	1:00 hour	€	95,00
3KIT.900.03	(1-1)	3:00 hours	€	137,00

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019





Housing for brickwork

●	1E00.055.01	€	20,00

Pop 01 **small Bulb** *trimless* *(for plasterboard and brickwork)*



IP20 Ⓛ CE ▽ ▣

220V ÷ 240V	e27 led 4W	CRI>80
3P01.A2L.□	dimm IGBT - TRIAC	€ 73,00
Led color	*Nominal lm*	*Beam spread*
2700 °K	470	360°

Pop 01 **big Bulb** *trimless* *(for plasterboard and brickwork)*



IP20 Ⓛ CE ▽ ▣

220V ÷ 240V	e27 led 4W	CRI>80
3P01.B2L.□	dimm IGBT - TRIAC	€ 78,00
Led color	*Nominal lm*	*Beam spread*
2700 °K	470	360°

□ *Frame*

02 Black
06 White
C1 Copper Anodized
S1 Brass Anodized

Available from 30/09/2019

Housing for plasterboard Ø 6,5cm

●	1Z00.055.01	Single	€ 18,00
●●	1Z00.055.2L	Double	€ 33,00
●●●	1Z00.055.3L	Triple	€ 49,00

Housing for brickwork

●	1M00.055.01	€ 90,00

easy Pop 01 **small Bulb** *with trim* *(for plasterboard and brickwork)*



IP20 Ⓛ CE ▽ ▣

220V ÷ 240V	e27 led 4W	CRI>80
3E01.A2L.□	dimm IGBT - TRIAC	€ 90,00
Led color	*Nominal lm*	*Beam spread*
2700 °K	470	360°

easy Pop 01 **big Bulb** *with trim* *(for plasterboard and brickwork)*



IP20 Ⓛ CE ▽ ▣

220V ÷ 240V	e27 led 4W	CRI>80
3E01.B2L.□	dimm IGBT - TRIAC	€ 95,00
Led color	*Nominal lm*	*Beam spread*
2700 °K	470	360°

□ *Frame*

02 Black
06 White
C1 Copper Anodized
S1 Brass Anodized

Available from 30/09/2019



Housing for brickwork

●	1E00.055.01	€ 20,00

Pop 01 Static Ø 12,5 trimless (for plasterboard and brickwork)



IP20 — 12V

3P01.530.□	G53 max 50W	€	118,00
3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

□ *Frame*

02 ● Black
06 ○ White

	P
3P01.530.□	4,4
3P01.6■◪◺.□	4,0
3P01.6■◪◺9.□	4,2

Housing for plasterboard Ø 14,0cm

●	1Z00.125.01	Single	€	40,00
●●	1Z00.125.2L	Double	€	75,00
●●●	1Z00.125.3L	Triple 20G	€	106,00

Housing for brickwork

●	1M00.125.01	€	139,00

IP40 — MC-E=3 — 350 - 500 - 700 m/A — CRI>90

3P01.6■◪◺.□		€	180,00 ▼

IP54 — MC-E=3 — 350 - 500 - 700 m/A — CRI>90

3P01.6■◪◺9.□		€	190,00 ▼

© (m-M)	LED 12,5W	350m/A	
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	1477	L = 60°
3 = 3000 °K	1565	S = 24°
4 = 4000 °K	1635	T = 12°

© (m-M)	LED 18,4W	500m/A	
3KIT.500.1L (1-1)	on/off	€	21,00
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€	105,00
3KIT.502.20 (1-1)	DALI	€	59,00
3KIT.503.20 (1-1)	Push - 1...10V	€	59,00
3KIT.504.20 (1-1)	IGBT - TRIAC	€	32,00

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

© (m-M)	LED 27W	700m/A	
3KIT.700.1L (1-1)	on/off	€	24,00
3KIT.701.50 (1-1)	DALI - Push - 1...10V	€	105,00

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	2683	L = 60°
3 = 3000 °K	2842	S = 24°
4 = 4000 °K	2963	T = 12°

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour	€	95,00
3KIT.900.03 (1-1)	3:00 hours	€	137,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 01 Dynamic Ø 12,5 trimless *(for plasterboard and brickwork)*



	Frame
02 ●	Black
06 ○	White

Housing for plasterboard Ø 14,0cm

●	1Z00.125.01	Single	€ 40,00
●●	1Z00.125.2L	Double	€ 75,00
●●●	1Z00.125.3L	Triple NEW	€ 106,00

Housing for brickwork

●	1M00.125.01	€ 139,00

IP20 — CE

12V

3P01D.530.□	GU5.3 max 50W	€ 182,00
3KIT.201.050	*max 50VA*	€ 32,00

Dimmable gear: IGBT

IP40 — MC-E=3 — CE

350 - 500 m/A — CRI>90

3P01D.6■◪.□ € 240,00 ▼

© (m-M) LED 12,5W 350m/A

3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1477	L = 60°
3 = 3000 °K	1565	S = 24°
4 = 4000 °K	1635	T = 12°

© (m-M) LED 18,4W 500m/A

3KIT.500.1L (1-1)	on/off	€ 21,00
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€ 105,00
3KIT.502.20 (1-1)	DALI	€ 59,00
3KIT.503.20 (1-1)	Push - 1...10V	€ 59,00
3KIT.504.20 (1-1)	IGBT - TRIAC	€ 32,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 02 Ø 5,5 trimless *(for plasterboard and brickwork)*

□	Frame
02	Black
06	White

IP20 — CE

220V ÷ 240V

3P02.210.□	GU10 max 50W	€	55,00
3P02.211.□	GU10 led	€	55,00
4P02.211.□	GU10 led	€	56,00
With honeycomb			

IP20 — CE

12V

3P02.220.□	GU5.3 max 50W	€	50,00
4P02.220.□	GU5.3 led	€	56,00
With honeycomb			
3KIT.201.050	*max 50VA*	€	32,00
Dimmable gear: IGBT			

IP40 — MC-E=3 — CE

350m/A	LED 11W	CRI>90	
3P02.3■◪.□		€	110,00 ▼
4P02.3■◪.□		€	116,00
With honeycomb			

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	1195	S = 22°
3 = 3000 °K	1257	T = 12°
4 = 4000 °K	1313	

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

IP40 — DimToWarm — CE

220V ÷ 240V — LED 6W — CRI 95

3P02.3W◪.□	dimm IGBT - TRIAC	€	150,00
4P02.3W◪.□	dimm IGBT - TRIAC	€	156,00
With honeycomb			

■ *Led color*	*Nominal lm*	◪ *Beam spread*
W= max 3000°K	max 445 lm	M = 30°
min. 1800°K	min. 10 lm	S = 18°

	Pop P02	P
3P02.210.□	GU10	4,7
3P02.211.□	GU10 led	—
4P02.211.□	GU10 led + honeycomb	—
3P02.220.□	GU5.3	4,7
4P02.220.□	GU5.3 led + honeycomb	—
3P02.3■◪.□	led IP40	4,7
4P02.3■◪.□	led IP40 + honeycomb	4,7
3P02.3W◪.□	led IP40	4,7
4P02.3W◪.□	led IP40 + honeycomb	4,7

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Housing for plasterboard Ø 6,5cm

●	1Z00.055.01	Single	€	18,00
●●	1Z00.055.2L	Double	€	33,00
●●●	1Z00.055.3L	Triple	€	49,00

Housing for brickwork

●	1M00.055.01	Single	€	90,00

easy Pop 02 Ø 5,5 with trim *(for plasterboard and brickwork)*

□	Frame
02	Black
06	White

Available from 30/09/2019



IP20 — CE

220V ÷ 240V

3E02.210.□	GU10 max 50W	€	75,00
3E02.211.□	GU10 led	€	75,00
4E02.211.□	GU10 led	€	81,00
With honeycomb			

IP20 — CE

12V

3E02.220.□	GU5.3 max 50W	€	70,00
4E02.220.□	GU5.3 led	€	76,00
With honeycomb			
3KIT.201.050	*max 50VA*	€	32,00
Dimmable gear: IGBT			

IP40 — MC-E=3 — CE

350m/A	LED 11W	CRI>90	
3E02.3■◪.□		€	110,00
4E02.3■◪.□		€	116,00
With honeycomb			

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	1195	S = 22°
3 = 3000 °K	1257	T = 12°
4 = 4000 °K	1313	

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

IP40 — DimToWarm — CE

220V ÷ 240V — LED 6W — CRI 95

3E02.3W◪.□	dimm IGBT - TRIAC	€	165,00
4E02.3W◪.□	dimm IGBT - TRIAC	€	171,00
With honeycomb			

■ *Led color*	*Nominal lm*	◪ *Beam spread*
W= max 3000°K	max 445 lm	M = 30°
min. 1800°K	min. 10 lm	S = 18°

	easy Pop E02	P
3E02.210.□	GU10	4,7
3E02.211.□	GU10 led	—
4E02.211.□	GU10 led + honeycomb	—
3E02.220.□	GU5.3	4,7
4E02.220.□	GU5.3 led + honeycomb	—
3E02.3■◪.□	led IP40	4,7
4E02.3■◪.□	led IP40 + honeycomb	4,7
3E02.3W◪.□	led IP40	4,7
4E02.3W◪.□	led IP40 + honeycomb	4,7

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.



Housing for brickwork

●	1E00.055.01		€	20,00

Pop 03 Ø 6,0 trimless *(only for plasterboard)*



IP20 — CE

12V

3P03.200.□	GU4 max 35W	€	54,00
3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP40 — CE

350m/A	LED 11W	CRI>90
3P03.2■S.□		€ 113,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	1195	22°
3 = 3000 °K	1257	
4 = 4000 °K	1313	

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.350.25 (2-2)	on/off	€	35,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour	€	95,00
3KIT.900.03 (1-1)	3:00 hours *Remote installation*	€	137,00

Housing for plasterboard Ø 7,6cm

● 1Z00.060.01		€	29,00

□ *Frame*

02	●	Black
06	○	White
C1	◐	Copper Anodized
S1	◐	Brass Anodized

Finishes C1 and S1 are available from 30/09/2019

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 03 *NaNo* Ø 6,0 trimless *(only for plasterboard)*

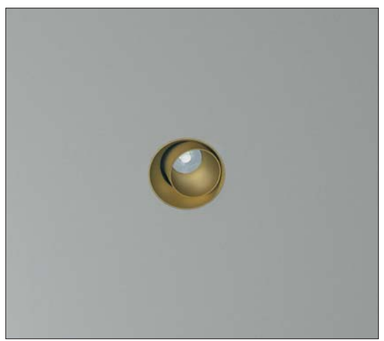



IP40 — CE

250m/A	LED 8W	CRI>90
3N03.2■S.□		€ 95,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	779	22°
3 = 3000 °K	819	
4 = 4000 °K	855	

© (m-M)	Driver		
3KIT.250.1L (1-1)	on/off	€	21,00
3KIT.251.28 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.252.12 (1-1)	DALI	€	59,00
3KIT.253.13 (1-1)	Push - 1...10V	€	59,00
3KIT.254.12 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour	€	95,00
3KIT.900.03 (1-1)	3:00 hours *Remote installation*	€	137,00

Housing for plasterboard Ø 7,6cm

● 1Z00.060.01		€	29,00

□ *Frame*

02	●	Black
06	○	White
C1	◐	Copper Anodized
S1	◐	Brass Anodized

Available from 30/09/2019

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 03 ø 8,0 trimless *(for plasterboard and brickwork)*



IP20 — CE

220V ÷ 240V

3P03.210.☐	GU10 max 50W	€	70,00
3P03.211.☐	GU10 led	€	70,00
4P03.211.☐	GU10 led	€	76,00

With honeycomb

IP20 — CE

12V

3P03.220.☐	GU5.3 max 50W	€	60,00
4P03.220.☐	GU5.3 led	€	66,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP40 — Flicker < 20% — CE

220V ÷ 240V	LED 9,5W	CRI>90		
3P03.K▩S.☐	dimm IGBT - TRIAC	€	99,00
4P03.K▩S.☐	dimm IGBT - TRIAC	€	105,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	710	24°
3 = 3000 °K	760	

☐ *Frame*

- 02 Black
- 06 White
- C1 Copper Anodized
- S1 Brass Anodized

Finishes C1 and S1 are available from 30/09/2019

	Pop P03	P	P1
3P03.210.☐	GU10	11,0	2,5
3P03.211.☐	GU10 led	—	2,5
4P03.211.☐	GU10 led + honeycomb	—	2,5
3P03.220.☐	GU5.3	9,4	2,5
4P03.220.☐	GU5.3 led + honeycomb	—	2,5
3P03.K▩S.☐	led 9,5W IP40	11,4	2,5
4P03.K▩S.☐	led 9,5W IP40 + honeycomb	11,9	2,5

Housing for plasterboard ø 9,5cm

●	1Z00.080.01	Single	€	33,00
●●	1Z00.080.2L	Double	€	61,00
●●●	1Z00.080.3L	Triple	€	89,00

Housing for brickwork

●	1M00.080.01		€	96,00



☐ *Frame*

- 02 Black
- 06 White
- C1 Copper Anodized
- S1 Brass Anodized

Finishes C1 and S1 are available from 30/09/2019

	Pop P03	P	P1
3P03.3▩M.☐	led IP40	10,5	0,5
3P03.3▩S.☐	led IP40	11,4	2,5
3P03.3▩T.☐	led IP40	9,4	0,5
4P03.3▩M.☐	led IP40 + honeycomb	11,0	0,5
4P03.3▩S.☐	led IP40 + honeycomb	11,9	2,5
4P03.3▩T.☐	led IP40 + honeycomb	9,9	0,5
3P03.3WM.☐	led IP40	6,8	0,5
3P03.3WS.☐	led IP40	8,8	2,5
3P03.3WT.☐	led IP40	6,8	0,5
4P03.3WM.☐	led IP40 + honeycomb	7,3	0,5
4P03.3WS.☐	led IP40 + honeycomb	9,3	2,5
4P03.3WT.☐	led IP40 + honeycomb	7,3	0,5

IP40 — MC-E=3 — CE

350m/A	LED 11W	CRI>90	
3P03.3▩◩.☐		€	135,00
4P03.3▩◩.☐		€	141,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1195	M = 38°
3 = 3000 °K	1257	S = 22°
4 = 4000 °K	1313	T = 10°

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

IP40 — DimToWarm — CE

220V ÷ 240V	LED 6W CRI 95	*Driver included*	
3P03.3W◩.☐	dimm IGBT - TRIAC	€	160,00
4P03.3W◩.☐	dimm IGBT - TRIAC	€	166,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K	max 445 lm	M = 30°
min. 1800°K	min. 10 lm	S = 18°

Housing for plasterboard ø 9,5cm

●	1Z00.080.01	Single	€	33,00
●●	1Z00.080.2L	Double	€	61,00
●●●	1Z00.080.3L	Triple	€	89,00

Housing for brickwork

●	1M00.080.01		€	96,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 03 **NaNo** Ø 8,0 trimless *(for plasterboard and brickwork)*



IP20			
220V ÷ 240V			
3N03.210.☐	GU10 max 50W	€	70,00
3N03.211.☐	GU10 led	€	70,00
4N03.211.☐	GU10 led	€	76,00
With honeycomb			

IP20			
12V			
3N03.220.☐	GU5.3 max 50W	€	60,00
4N03.220.☐	GU5.3 led	€	66,00
With honeycomb			
3KIT.201.050	*max 50VA*	€	32,00
Dimmable gear: IGBT			

IP40	Flicker < 20%		
220V ÷ 240V	LED 9,5W	CRI>90	
3N03.K■**S.**☐	dimm IGBT - TRIAC	€	99,00
4N03.K■**S.**☐	dimm IGBT - TRIAC	€	105,00
With honeycomb			

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	710	24°
3 = 3000 °K	760	

☐	*Frame*
02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Finishes C1 and S1 are available from 30/09/2019

	Pop NaNo NO3	P	P1
3N03.210.☐	GU10	9,1	0,5
3N03.211.☐	GU10 led	—	0,5
4N03.211.☐	GU10 led + honeycomb	—	0,5
3N03.220.☐	GU5.3	7,5	0,5
4N03.220.☐	GU5.3 led + honeycomb	—	0,5
3N03.K■S.☐	led 9,5W IP40	10,0	0,5
4N03.K■S.☐	led 9,5W IP40 + honeycomb	10,5	0,5

Housing for plasterboard ⌓ Ø 9,5cm			
● **1Z00.080.01**	Single	€	33,00
●● **1Z00.080.2L**	Double	€	61,00
●●● **1Z00.080.3L**	Triple	€	89,00
Housing for brickwork			
● **1M00.080.01**		€	96,00

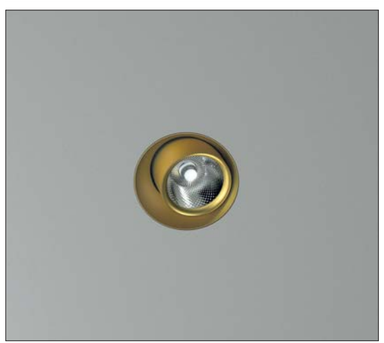



IP40	MC-E=3		
250m/A	LED 8W	CRI>90	
3N03.3■◩.☐		€	100,00
4N03.3■◩.☐		€	106,00
With honeycomb			

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700 °K	779	M = 38°
3 = 3000 °K	819	S = 22°
4 = 4000 °K	855	T = 10°

© (m-M)	Driver		
3KIT.250.1L (1-1)	on/off	€	21,00
3KIT.251.28 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.252.12 (1-1)	DALI	€	59,00
3KIT.253.13 (1-1)	Push - 1...10V	€	59,00
3KIT.254.12 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

☐	*Frame*
02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

	Pop NaNo NO3	P	P1
3N03.3■M.☐	led IP40	7,8	0,5
3N03.3■S.☐	led IP40	6,8	0,5
3N03.3■T.☐	led IP40	6,8	0,5
4N03.3■M.☐	led IP40 + honeycomb	8,3	0,5
4N03.3■S.☐	led IP40 + honeycomb	7,3	0,5
4N03.3■T.☐	led IP40 + honeycomb	7,3	0,5

Housing for plasterboard ⌓ Ø 9,5cm			
● **1Z00.080.01**	Single	€	33,00
●● **1Z00.080.2L**	Double	€	61,00
●●● **1Z00.080.3L**	Triple	€	89,00
Housing for brickwork			
● **1M00.080.01**		€	96,00

*(**m-M**) = min. Led unit - Max Led unit.*
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop 03 ø 8,0 with trim *(for plasterboard and brickwork)*



IP20 — CE

220V ÷ 240V

3E03.210.☐	GU10 max 50W	€	99,00
3E03.211.☐	GU10 led	€	99,00
4E03.211.☐	GU10 led	€	105,00

With honeycomb

IP20 — CE

12V

3E03.220.☐	GU5.3 max 50W	€	95,00
4E03.220.☐	GU5.3 led	€	101,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP40 — Flicker < 20% — CE

220V ÷ 240V — LED 9,5W — CRI>90

3E03.K■S.☐	dimm IGBT - TRIAC	€	130,00
4E03.K■S.☐	dimm IGBT - TRIAC	€	136,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	710	24°
3 = 3000 °K	760	



Housing for brickwork

● 1E00.080.01		€	25,00

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

	easy Pop E03	P	P1
3E03.210.☐	GU10	11,0	2,5
3E03.211.☐	GU10 led	—	2,5
4E03.211.☐	GU10 led + honeycomb	—	2,5
3E03.220.☐	GU5.3	9,4	2,5
4E03.220.☐	GU5.3 led + honeycomb	—	2,5
3E03.K■S.☐	led 9,5W IP40	11,4	2,5
4E03.K■S.☐	led 9,5W IP40 + honeycomb	11,9	2,5



IP40 — MC-E=3 — CE

350m/A — LED 11W — CRI>90

3E03.3■■.☐		€	130,00
4E03.3■■.☐		€	136,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1195	M = 38°
3 = 3000 °K	1257	S = 22°
4 = 4000 °K	1313	T = 10°

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

IP40 — © — DimToWarm — CE

220V ÷ 240V — LED 6W CRI 95 — *Driver included*

3E03.3W■■.☐	dimm IGBT - TRIAC	€	180,00
4E03.3W■■.☐	dimm IGBT - TRIAC	€	186,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K min. 1800°K	max 445 lm min. 10 lm	M = 30° S = 18°

Housing for brickwork

● 1E00.080.01		€	25,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

	easy Pop E03	P	P1
3E03.3■M.☐	led IP40	10,5	0,5
3E03.3■S.☐	led IP40	11,4	2,5
3E03.3■T.☐	led IP40	9,4	0,5
4E03.3■M.☐	led IP40 + honeycomb	11,0	0,5
4E03.3■S.☐	led IP40 + honeycomb	11,9	2,5
4E03.3■T.☐	led IP40 + honeycomb	9,9	0,5
3E03.3WM.☐	led IP40	6,8	0,5
3E03.3WS.☐	led IP40	8,8	2,5
3E03.3WT.☐	led IP40	6,8	0,5
4E03.3WM.☐	led IP40 + honeycomb	7,3	0,5
4E03.3WS.☐	led IP40 + honeycomb	9,3	2,5
4E03.3WT.☐	led IP40 + honeycomb	7,3	0,5

easy Pop 03 **NaNo** Ø 8,0 with trim *(for plasterboard and brickwork)*



IP20 — CE

220V ÷ 240V

3F03.210.☐	GU10 max 50W	€	99,00
3F03.211.☐	GU10 led	€	99,00
4F03.211.☐	GU10 led	€	105,00

With honeycomb

IP20 — CE

12V

3F03.220.☐	GU5.3 max 50W	€	95,00
4F03.220.☐	GU5.3 led	€	101,00

With honeycomb

3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP40 — Flicker < 20% — CE

220V ÷ 240V — LED 9,5W — CRI>90

3F03.K■S.☐	dimm IGBT - TRIAC	€	130,00
4F03.K■S.☐	dimm IGBT - TRIAC	€	136,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	710	24°
3 = 3000 °K	760	



Housing for brickwork

● 1E00.080.01 € 25,00

☐ *Frame*

- 02 Black
- 06 White
- C1 Copper Anodized
- S1 Brass Anodized

Available from 30/09/2019

	easy NaNo Pop F03	P	P1
3F03.210.☐	GU10	9,1	0,5
3F03.211.☐	GU10 led	—	0,5
4F03.211.☐	GU10 led + honeycomb	—	0,5
3F03.220.☐	GU5.3	7,5	0,5
4F03.220.☐	GU5.3 led + honeycomb	—	0,5
3F03.K■S.☐	led 9,5W IP40	10,0	0,5
4F03.K■S.☐	led 9,5W IP40 + honeycomb	10,5	0,5



IP40 — MC-E=3 — CE

250m/A — LED 8W — CRI>90

3F03.3■■.☐		€	130,00
4F03.3■■.☐		€	136,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	779	M = 38°
3 = 3000 °K	819	S = 22°
4 = 4000 °K	855	T = 10°

© (m-M)	Driver		
3KIT.250.1L (1-1)	on/off	€	21,00
3KIT.251.28 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.252.12 (1-1)	DALI	€	59,00
3KIT.253.13 (1-1)	Push - 1...10V	€	59,00
3KIT.254.12 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00



Housing for brickwork

● 1E00.080.01 € 25,00

☐ *Frame*

- 02 Black
- 06 White
- C1 Copper Anodized
- S1 Brass Anodized

Available from 30/09/2019

	easy NaNo Pop F03	P	P1
3F03.3■M.☐	led IP40	7,8	0,5
3F03.3■S.☐	led IP40	6,8	0,5
3F03.3■T.☐	led IP40	6,8	0,5
4F03.3■M.☐	led IP40 + honeycomb	8,3	0,5
4F03.3■S.☐	led IP40 + honeycomb	7,3	0,5
4F03.3■T.☐	led IP40 + honeycomb	7,3	0,5

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop X3 ø 10,0 trimless *(only for plasterboard)*



	Pop PX3	P	P1
3PX3.210.☐	GU10	10,9	2,5
3PX3.211.☐	GU10 led	—	2,5
4PX3.211.☐	GU10 led + honeycomb	—	2,5
3PX3.K■S.☐	led 9,5W IP40	11,4	2,5
4PX3.K■S.☐	led 9,5W IP40 + honeycomb	11,9	2,5

IP20 ⓔ — CE ▽ ▣

220V ÷ 240V

3PX3.210.☐	GU10 max 50W	€	75,00
3PX3.211.☐	GU10 led	€	75,00
4PX3.211.☐	GU10 led	€	81,00

With honeycomb

IP40 — Flicker < 20% — CE ▽ ▣

220V ÷ 240V	LED 9,5W	CRI>90		
3PX3.K■S.☐	dimm IGBT - TRIAC	€	105,00
4PX3.K■S.☐	dimm IGBT - TRIAC	€	111,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	710	24°
3 = 3000°K	760	

☐ *Frame*

- 02 Black
- 06 White
- C1 Copper Anodized
- S1 Brass Anodized

Available from 30/09/2019

Housing for plasterboard

● 1Z00.100.01 — Ø 11,4cm — € 45,00

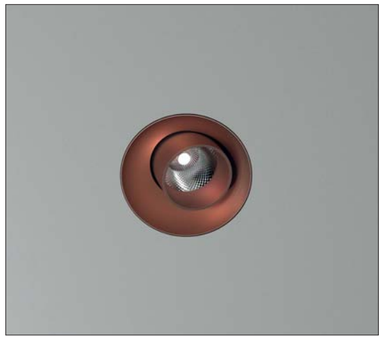

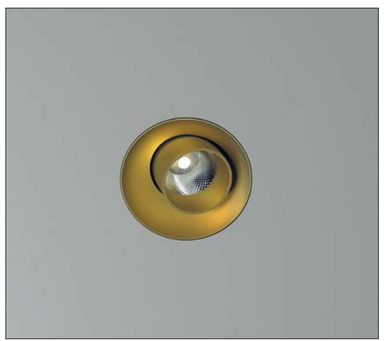



	Pop PX3	P	P1
3PX3.3■M.☐	led IP40	10,5	0,5
3PX3.3■S.☐	led IP40	11,4	2,5
3PX3.3■T.☐	led IP40	9,4	0,5
4PX3.3■M.☐	led IP40 + honeycomb	11,0	0,5
4PX3.3■S.☐	led IP40 + honeycomb	11,9	2,5
4PX3.3■T.☐	led IP40 + honeycomb	9,9	0,5
3PX3.3WM.☐	led IP40	6,8	0,5
3PX3.3WS.☐	led IP40	8,8	2,5
3PX3.3WT.☐	led IP40	6,8	0,5
4PX3.3WM.☐	led IP40 + honeycomb	7,3	0,5
4PX3.3WS.☐	led IP40 + honeycomb	9,3	2,5
4PX3.3WT.☐	led IP40 + honeycomb	7,3	0,5

☐ *Frame*

- 02 Black
- 06 White
- C1 Copper Anodized
- S1 Brass Anodized

Available from 30/09/2019

IP40 ⓒ — MC-E=3 — CE ▽ ◈

350m/A	LED 11W	CRI>90	
3PX3.3■◪.☐		€	135,00
4PX3.3■◪.☐		€	141,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	1195	M = 38°
3 = 3000°K	1257	S = 22°
4 = 4000°K	1313	T = 10°

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

IP40 ⓒ — DimToWarm — CE ▽ ◈

220V ÷ 240V	LED 6W CRI 95	*Driver included*	
3PX3.3W◪.☐	dimm IGBT - TRIAC	€	160,00
4PX3.3W◪.☐	dimm IGBT - TRIAC	€	166,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K	max 445 lm	M = 30°
min. 1800°K	min. 10 lm	S = 18°

Housing for plasterboard

● 1Z00.100.01 — Ø 11,4cm — € 45,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop X3 **NaNo** Ø 10,0 trimless *(only for plasterboard)*



IP20		
220V ÷ 240V		
3NX3.210.☐	GU10 max 50W	€ 75,00
3NX3.211.☐	GU10 led	€ 75,00
4NX3.211.☐	GU10 led	€ 81,00
With honeycomb		

IP40	Flicker < 20%	
220V ÷ 240V	LED 9,5W	CRI>90
3NX3.K■S.☐	dimm IGBT - TRIAC	€ 105,00
4NX3.K■S.☐	dimm IGBT - TRIAC	€ 111,00
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	710	24°
3 = 3000 °K	760	

☐	*Frame*
02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

	Pop NaNo NX3	P	P1
3NX3.210.☐	GU10	9,1	0,5
3NX3.211.☐	GU10 led	—	0,5
4NX3.211.☐	GU10 led + honeycomb	—	0,5
3NX3.K■S.☐	led 9,5W IP40	10,0	0,5
4NX3.K■S.☐	led 9,5W IP40 + honeycomb	10,5	0,5

Housing for plasterboard

● 1Z00.100.01 Ø 11,4cm € 45,00



IP40	MC-E=3	
250m/A	LED 8W	CRI>90
3NX3.3■■.☐		€ 120,00
4NX3.3■■.☐		€ 126,00
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	779	M = 38°
3 = 3000 °K	819	S = 22°
4 = 4000 °K	855	T = 10°

© (m-M)	Driver	
3KIT.250.1L (1-1)	on/off	€ 21,00
3KIT.251.28 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.252.12 (1-1)	DALI	€ 59,00
3KIT.253.13 (1-1)	Push - 1...10V	€ 59,00
3KIT.254.12 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

☐	*Frame*
02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

	Pop NaNo NX3	P	P1
3NX3.3■M.☐	led IP40	7,8	0,5
3NX3.3■S.☐	led IP40	6,8	0,5
3NX3.3■T.☐	led IP40	6,8	0,5
4NX3.3■M.☐	led IP40 + honeycomb	8,3	0,5
4NX3.3■S.☐	led IP40 + honeycomb	7,3	0,5
4NX3.3■T.☐	led IP40 + honeycomb	7,3	0,5

Housing for plasterboard

● 1Z00.100.01 Ø 11,4cm € 45,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop X3 ø 10,0 with trim (for plasterboard and brickwork)



	easy Pop EX3	P	P1
3EX3.210.☐	GU10	10,9	2,5
3EX3.211.☐	GU10 led	—	2,5
4EX3.211.☐	GU10 led + honeycomb	—	2,5
3EX3.K■S.☐	led 9,5W IP40	11,4	2,5
4EX3.K■S.☐	led 9,5W IP40 + honeycomb	11,9	2,5

☐ *Frame*

- 02 Block
- 06 White
- C1 Copper Anodized
- S1 Brass Anodized

Available from 30/09/2019

IP20 — CE

220V ÷ 240V

3EX3.210.☐	GU10 max 50W	€ 120,00
3EX3.211.☐	GU10 led	€ 120,00
4EX3.211.☐	GU10 led	€ 126,00

With honeycomb

IP40 — Flicker < 20% — CE

220V ÷ 240V	LED 9,5W	CRI>90	
3EX3.K■S.☐	dimm IGBT - TRIAC		€ 145,00
4EX3.K■S.☐	dimm IGBT - TRIAC		€ 151,00

With honeycomb

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	710	24°
3 = 3000 °K	760	



Housing for brickwork

- 1E00.100.01 € 25,00



	easy Pop EX3	P	P1
3EX3.■M.☐	led IP40	10,5	0,5
3EX3.■S.☐	led IP40	11,4	2,5
3EX3.■T.☐	led IP40	9,4	0,5
4EX3.■M.☐	led IP40 + honeycomb	11,0	0,5
4EX3.■S.☐	led IP40 + honeycomb	11,9	2,5
4EX3.■T.☐	led IP40 + honeycomb	9,9	0,5
3EX3.3WM.☐	led IP40	6,8	0,5
3EX3.3WS.☐	led IP40	8,8	2,5
3EX3.3WT.☐	led IP40	6,8	0,5
4EX3.3WM.☐	led IP40 + honeycomb	7,3	0,5
4EX3.3WS.☐	led IP40 + honeycomb	9,3	2,5
4EX3.3WT.☐	led IP40 + honeycomb	7,3	0,5

☐ *Frame*

- 02 Block
- 06 White
- C1 Copper Anodized
- S1 Brass Anodized

Available from 30/09/2019

IP40 — MC-E=3 — CE

350m/A	LED 11W	CRI>90	
3EX3.■■.☐			€ 145,00
4EX3.■■.☐			€ 151,00

With honeycomb

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	1195	M = 38°
3 = 3000 °K	1257	S = 22°
4 = 4000 °K	1313	T = 10°

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

IP40 — DimToWarm — CE

220V ÷ 240V	LED 6W CRI 95	*Driver included*	
3EX3.3W■.☐	dimm IGBT - TRIAC		€ 200,00
4EX3.3W■.☐	dimm IGBT - TRIAC		€ 206,00

With honeycomb

■ *Led color*	*Nominal lm*	*Beam spread*
W= max 3000°K	max 445 lm	M = 30°
min. 1800°K	min. 10 lm	S = 18°



Housing for brickwork

- 1E00.100.01 € 25,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop X3 **NaNo** *Ø 10,0 with trim (for plasterboard and brickwork)*



IP20 — 220V ÷ 240V

3FX3.210.☐	GU10 max 50W	€	120,00
3FX3.211.☐	GU10 led	€	120,00
4FX3.211.☐	GU10 led	€	126,00

With honeycomb

IP40 — Flicker < 20%

220V ÷ 240V — LED 9,5W — CRI>90

3FX3.K■S.☐	dimm IGBT - TRIAC	€	145,00
4FX3.K■S.☐	dimm IGBT - TRIAC	€	151,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	710	24°
3 = 3000 °K	760	

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019



Housing for brickwork

● 1E00.100.01		€	25,00

	easy NaNo Pop FX3	P	P1
3FX3.210.☐	GU10	9,1	0,5
3FX3.211.☐	GU10 led	—	0,5
4FX3.211.☐	GU10 led + honeycomb	—	0,5
3FX3.K■S.☐	led 9,5W IP40	10,0	0,5
4FX3.K■S.☐	led 9,5W IP40 + honeycomb	10,5	0,5



IP40 — MC-E=3

250m/A	LED 8W	CRI>90
3FX3.3■■.☐		€ 145,00
4FX3.3■■.☐		€ 151,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	779	M = 38°
3 = 3000 °K	819	S = 22°
4 = 4000 °K	855	T = 10°

© (m-M)	Driver		
3KIT.250.1L (1-1)	on/off	€	21,00
3KIT.251.28 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.252.12 (1-1)	DALI	€	59,00
3KIT.253.13 (1-1)	Push - 1...10V	€	59,00
3KIT.254.12 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019



Housing for brickwork

● 1E00.100.01		€	25,00

	easy NaNo Pop FX3	P	P1
3FX3.3■M.☐	led IP40	7,8	0,5
3FX3.3■S.☐	led IP40	6,8	0,5
3FX3.3■T.☐	led IP40	6,8	0,5
4FX3.3■M.☐	led IP40 + honeycomb	8,3	0,5
4FX3.3■S.☐	led IP40 + honeycomb	7,3	0,5
4FX3.3■T.☐	led IP40 + honeycomb	7,3	0,5

*(**m-M**) = min. Led unit - Max Led unit.*
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop Y3 ø 10,0 trimless *(only for plasterboard)*

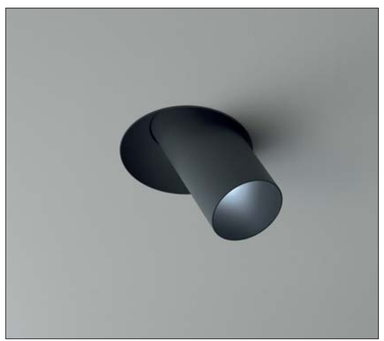



	Pop PY3	P
3PY3.210.□	GU10	9,1
3PY3.211.□	GU10 led	—
4PY3.211.□	GU10 led + honeycomb	—
3PY3.3■◪◥.□	led IP40	9,4
4PY3.3■◪◥.□	led IP40 + honeycomb	9,9
3PY3.3W◪◥.□	led IP40	6,1
4PY3.3W◪◥.□	led IP40 + honeycomb	6,6

□ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

IP20 — CE

220V ÷ 240V

3PY3.210.□	GU10 max 50W	€ 95,00
3PY3.211.□	GU10 led	€ 95,00
4PY3.211.□	GU10 led	€ 101,00

With honeycomb

IP40 — MC-E=3 — CE

350m/A — LED 11W — CRI>90

3PY3.3■S.□		€ 130,00
4PY3.3■S.□		€ 136,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	1195	20°
3 = 3000°K	1257	
4 = 4000°K	1313	

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

IP40 — DimToWarm — CE

220V ÷ 240V — LED 6W CRI 95 — *Driver included*

3PY3.3WS.□	dimm IGBT - TRIAC	€ 170,00
4PY3.3WS.□	dimm IGBT - TRIAC	€ 176,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K min. 1800°K	max 445 lm min. 10 lm	20°

Housing for plasterboard

● 1Z00.100.01	Ø 11,4cm	€ 45,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop Y3 NaNo ø 10,0 trimless *(only for plasterboard)*

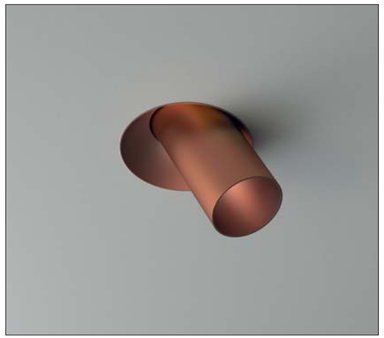

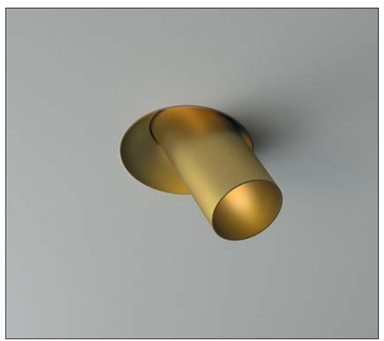



	Pop NY3	P
3NY3.3■◪◥.□	led IP40	6,8
4NY3.3■◪◥.□	led IP40 + honeycomb	7,3

□ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

IP40 — MC-E=3 — CE

250m/A — LED 8W — CRI>90

3NY3.3■S.□		€ 120,00
4NY3.3■S.□		€ 126,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	779	20°
3 = 3000°K	819	
4 = 4000°K	855	

© (m-M)	Driver	
3KIT.250.1L (1-1)	on/off	€ 21,00
3KIT.251.28 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.252.12 (1-1)	DALI	€ 59,00
3KIT.253.13 (1-1)	Push - 1...10V	€ 59,00
3KIT.254.12 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

Housing for plasterboard

● 1Z00.100.01	Ø 11,4cm	€ 45,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop Y3 ø 10,0 with trim (for plasterboard and brickwork)

IP20 — 220V ÷ 240V

3EY3.210.☐	GU10 max 50W	€	140,00
3EY3.211.☐	GU10 led	€	140,00
4EY3.211.☐	GU10 led	€	146,00

With honeycomb

IP40 — DimToWarm — 220V ÷ 240V — LED 6W CRI 95 — *Driver included*

3EY3.3WS.☐	dimm IGBT - TRIAC	€	220,00
4EY3.3WS.☐	dimm IGBT - TRIAC	€	226,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K min. 1800°K	max 445 lm min. 10 lm	20°

IP40 — MC-E=3 — 350m/A — LED 11W — CRI>90

3EY3.3■S.☐		€	165,00
4EY3.3■S.☐		€	171,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1195	20°
3 = 3000 °K	1257	
4 = 4000 °K	1313	

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

	easy Pop EY3	P
3EY3.210.☐	GU10	9,1
3EY3.211.☐	GU10 led	—
4EY3.211.☐	GU10 led + honeycomb	—
3EY3.3■◪.☐	led IP40	9,4
4EY3.3■◪.☐	led IP40 + honeycomb	9,9
3EY3.3W◪.☐	led IP40	6,1
4EY3.3W◪.☐	led IP40 + honeycomb	6,6





Housing for brickwork

● 1E00.100.01 € 25,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop Y3 NaNo ø 10,0 with trim (for plasterboard and brickwork)

IP40 — MC-E=3 — 250m/A — LED 8W — CRI>90

3FY3.3■S.☐		€	165,00
4FY3.3■S.☐		€	171,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	779	20°
3 = 3000 °K	879	
4 = 4000 °K	855	

© (m-M)	Driver		
3KIT.250.1L (1-1)	on/off	€	21,00
3KIT.251.28 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.252.12 (1-1)	DALI	€	59,00
3KIT.253.13 (1-1)	Push - 1...10V	€	59,00
3KIT.254.12 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

☐ *Frame*

02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

	easy Pop NaNo FY3	P
3FY3.3■◪.☐	led IP40	6,8
4FY3.3■◪.☐	led IP40 + honeycomb	7,3





Housing for brickwork

● 1E00.100.01 € 25,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop Y3 Ø 10,0 trimless, Glass (only for plasterboard)



	Pop PY3	P
3PY3.210.☐	GU10	12,0
3PY3.211.☐	GU10 led	—
4PY3.211.☐	GU10 led + honeycomb	—
3PY3.220.☐	GU5.3	10,4
4PY3.220.☐	GU5.3 led + honeycomb	—
3PY3.3■◪.☐	led IP40	12,6
4PY3.3■◪.☐	led IP40 + honeycomb	13,1
3PY3.3W◪.☐	led IP40	6,1
4PY3.3W◪.☐	led IP40 + honeycomb	6,6

☐	Frame	Glass
02F	Black	Fumé
06T	White	Transparent
C1F	Copper Anodized	Fumé
S1C	Brass Anodized	Champagne

Available from 30/09/2019

IP20 — CE

220V ÷ 240V

3PY3.211.☐	GU10 led ONLY	€ 120,00
4PY3.211.☐	GU10 led ONLY	€ 126,00

With honeycomb

IP40 — MC-E=3 — CE

350m/A — LED 11W — CRI>90

3PY3.3■◪.☐	€ 145,00
4PY3.3■◪.☐	€ 151,00

With honeycomb

■ Led color	Nominal lm	◪ Beam spread
2 = 2700°K	1195	S = 22°
3 = 3000°K	1257	T = 12°
4 = 4000°K	1313	

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

IP40 — DimToWarm — CE

220V ÷ 240V — LED 6W CRI 95 — *Driver incluso*

3PY3.3W◪.☐	dimm IGBT - TRIAC	€ 190,00
4PY3.3W◪.☐	dimm IGBT - TRIAC	€ 196,00

With honeycomb

■ Led color	Nominal lm	◪ Beam spread
W= max 3000°K min. 1800°K	max 445 lm min. 10 lm	M = 30° S = 18°

Housing for plasterboard

● 1Z00.100.01	Ø 11,4cm	€ 45,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop Y3 NaNo Ø 10,0 trimless, Glass (only for plasterboard)



	Pop NaNo NY3	P
3NY3.3■◪.☐	led IP40	9,7
4NY3.3■◪.☐	led IP40 + honeycomb	10,2

☐	Frame	Glass
02F	Black	Fumé
06T	White	Transparent
C1F	Copper Anodized	Fumé
S1C	Brass Anodized	Champagne

Available from 30/09/2019

IP40 — MC-E=3 — CE

250m/A — LED 8W — CRI>90

3NY3.3■◪.☐	€ 140,00
4NY3.3■◪.☐	€ 146,00

With honeycomb

■ Led color	Nominal lm	◪ Beam spread
2 = 2700°K	779	S = 22°
3 = 3000°K	879	T = 12°
4 = 4000°K	855	

© (m-M)	Driver	
3KIT.250.1L (1-1)	on/off	€ 21,00
3KIT.251.28 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.252.12 (1-1)	DALI	€ 59,00
3KIT.253.13 (1-1)	Push - 1...10V	€ 59,00
3KIT.254.12 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

Housing for plasterboard

● 1Z00.100.01	Ø 11,4cm	€ 45,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop Y3 Ø 10,0 with trim, Glass (for plasterboard and brickwork)

IP20 — CE

220V ÷ 240V

3EY3.211.☐	GU10 led ONLY	€ 160,00
4EY3.211.☐	GU10 led ONLY	€ 166,00

With honeycomb

IP40 — DimToWarm — CE

220V ÷ 240V — LED 6W — CRI 95 — *Driver incluso*

3EY3.3W◪◹.☐	dimm IGBT - TRIAC	€ 235,00
4EY3.3W◪◹.☐	dimm IGBT - TRIAC	€ 241,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
W= max 3000°K	max 445 lm	M = 30°
min. 1800°K	min. 10 lm	S = 18°

IP40 — MC-E=3 — CE

350m/A — LED 11W — CRI>90

3EY3.3◪◹.☐	€ 185,00
4EY3.3◪◹.☐	€ 191,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	1195	S = 22°
3 = 3000°K	1257	T = 12°
4 = 4000°K	1313	

© (m-M) — Driver

3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

☐	*Frame*	*Glass*
02F	Black	Fumé
06T	White	Transparent
C1F	Copper Anodized	Fumé
S1C	Brass Anodized	Champagne

Available from 30/09/2019

	easy Pop EY3	P
3EY3.210.☐	GU10	9,1
3EY3.211.☐	GU10 led	—
4EY3.211.☐	GU10 led + honeycomb	—
3EY3.3◪◹.☐	led IP40	9,4
4EY3.3◪◹.☐	led IP40 + honeycomb	9,9
3EY3.3W◪◹.☐	led IP40	6,1
4EY3.3W◪◹.☐	led IP40 + honeycomb	6,6





Housing for brickwork

● 1E00.100.01 € 25,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop Y3 NaNo Ø 10,0 with trim, Glass (for plasterboard and brickwork)

IP40 — MC-E=3 — CE

250m/A — LED 8W — CRI>90

3FY3.3◪◹.☐	€ 185,00
4FY3.3◪◹.☐	€ 191,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	779	S = 22°
3 = 3000°K	879	T = 12°
4 = 4000°K	855	

© (m-M) — Driver

3KIT.250.1L (1-1)	on/off	€ 21,00
3KIT.251.28 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.252.12 (1-1)	DALI	€ 59,00
3KIT.253.13 (1-1)	Push - 1...10V	€ 59,00
3KIT.254.12 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

☐	*Frame*	*Glass*
02F	Black	Fumé
06T	White	Transparent
C1F	Copper Anodized	Fumé
S1C	Brass Anodized	Champagne

Available from 30/09/2019

	easy Pop NaNo FY3	P
3FY3.3◪◹.☐	led IP40	9,7
4FY3.3◪◹.☐	led IP40 + honeycomb	10,2





Housing for brickwork

● 1E00.100.01 € 25,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop Z3 Ø 10,0 trimless (only for plasterboard)

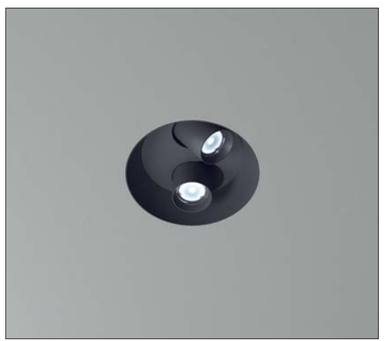
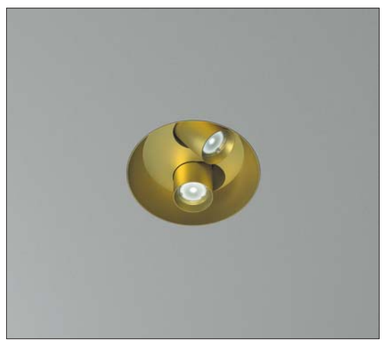

□	*Frame*
02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019



IP40 ©	MC-E=3	CE ▽
500m/A	LED 2x6W	CRI>90
3PZ3.2 ■ M. □		€ **230,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	2x528	25°
3 = 3000 °K	2x552	

© (to order)	Driver	
3KIT.500.15 (n° 2)	on/off	€ **27,00**
3KIT.501.50 (n° 1)	DALI - Push - 1...10V	€ **105,00**
3KIT.502.20 (n° 1)	DALI	€ **59,00**
3KIT.503.20 (n° 1)	Push - 1...10	€ **59,00**
3KIT.504.10 (n° 2)	IGBT - TRIAC	€ **32,00**

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ **95,00**
3KIT.900.03 (1-1)	3:00 hours/ore	€ **137,00**

Housing for plasterboard

●	**1Z00.100.01**	Ø 11,4cm	€ **45,00**

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

easy Pop Z3 *ø 10,0 with trim* *(for plasterboard and brickwork)*

	Frame
02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019



IP40	MC-E=3	CE
500m/A	LED 2x6W	CRI>90
3EZ3.2 ■ M. □		€ **280,00**

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2x528	25°
3 = 3000 °K	2x552	

© (to order)	Driver	
3KIT.500.15 (n° 2)	on/off	€ **27,00**
3KIT.501.50 (n° 1)	DALI - Push - 1...10V	€ **105,00**
3KIT.502.20 (n° 1)	DALI	€ **59,00**
3KIT.503.20 (n° 1)	Push - 1...10	€ **59,00**
3KIT.504.10 (n° 2)	IGBT - TRIAC	€ **32,00**

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ **95,00**
3KIT.900.03 (1-1)	3:00 hours/ore	€ **137,00**



Housing for brickwork

●	**1E00.100.01**	€ **25,00**

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 03 *ø 17,0 trimless* *(for plasterboard and brickwork)*

	Frame
02	Black
06	White

IP20 — 12V

3P03.530.□	G53 max 50W	€	164,00
3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

Housing for plasterboard ø 19,0 cm

●	1Z00.170.01	Single	€	57,00
●●	1Z00.170.2L	Double	€	111,00
●●●	1Z00.170.3L	Triple ROS	€	161,00

Housing for brickwork

●	1M00.170.01		€	148,00



IP20 — MC-E=3 — 350 - 500 - 700 m/A — CRI>90

3P03.6■◪.□		€	273,00

© (m-M)	LED 12,5W	350m/A		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1477	L = 60°
3 = 3000 °K	1565	S = 24°
4 = 4000 °K	1635	T = 12°

© (m-M)	LED 18,4W	500m/A		
3KIT.500.1L (1-1)	on/off	€	21,00
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€	105,00
3KIT.502.20 (1-1)	DALI	€	59,00
3KIT.503.20 (1-1)	Push - 1...10V	€	59,00
3KIT.504.20 (1-1)	IGBT - TRIAC	€	32,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

© (m-M)	LED 27W	700m/A		
3KIT.700.1L (1-1)	on/off	€	24,00
3KIT.701.50 (1-1)	DALI - Push - 1...10V	€	105,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2683	L = 60°
3 = 3000 °K	2842	S = 24°
4 = 4000 °K	2963	T = 12°

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 03 Static Ø 17,0 trimless (for plasterboard and brickwork)



IP40	MC-E=3	CE
700m/A	LED 26W	CRI>90
3P03S.6 ■ L.□		€ 241,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	3374	80°
3 = 3000 °K	3533	
4 = 4000 °K	3649	

© (m-M)	Driver 700m/A	
3KIT.700.1L (1-1)	on/off	€ 24,00
3KIT.701.50 (1-1)	DALI - Push - 1...10V	€ 105,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

□ *Frame*

02 ● Black
06 ○ White

Housing for plasterboard Ø 19,0 cm

● 1Z00.170.01	Single	€ 57,00

Housing for brickwork

● 1M00.170.01	€ 148,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 03 Wall Wash Ø 17,0 cm ROS



IP40	MC-E=3	CE
700m/A	LED 26W	CRI>90
3P03S.6 ■ W.□		€ 210,00 ▼

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	3374	W = wall wash
3 = 3000 °K	3533	
4 = 4000 °K	3649	

© (m-M)	Driver 700m/A	
3KIT.700.1L (1-1)	on/off	€ 24,00
3KIT.701.50 (1-1)	DALI - Push - 1...10V	€ 105,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

□ *Frame*

02 ● Black
06 ○ White

Housing for plasterboard Ø 19,0 cm

● 1Z00.170.01	Single	€ 57,00

Housing for brickwork

● 1M00.170.01	€ 148,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 03 Look Ø 17,0 trimless *(only for plasterboard)*

	Frame
02	Black
06	White







Look x1

IP40	MC-E=3	CE ▽
350m/A	LED 1x13,4W	CRI>90
3PL31.2 M.		€ 193,00
4PL31.2 M.		€ 199,00
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1650	37°
3 = 3000 °K	1727	
4 = 4000 °K	1786	

©	Driver	
3KIT.350.1L (n° 1)	on/off	€ 21,00
3KIT.352.15 (n° 1)	DALI	€ 59,00
3KIT.353.15 (n° 1)	Push - 1...10V	€ 59,00
3KIT.354.18 (n° 1)	IGBT - TRIAC	€ 32,00

Look x2

IP40	MC-E=3	CE ▽
350m/A	LED 2x13,4W	CRI>90
3PL32.2 M.		€ 289,00
4PL32.2 M.		€ 301,00
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2x1650	37°
3 = 3000 °K	2x1727	
4 = 4000 °K	2x1786	

©	Driver	
3KIT.350.1L (n° 2)	on/off	€ 21,00
3KIT.351.40 (n° 1)	DALI - Push - 1...10V	€ 105,00
3KIT.354.18 (n° 2)	IGBT - Triac	€ 32,00

Housing for plasterboard

●	**1K00.170.01**	Ø 19,0 cm	€ 64,00

Look x3

IP40	MC-E=3	CE ▽
350m/A	LED 3x13,4W	CRI>90
3PL33.2 M.		€ 386,00
4PL33.2 M.		€ 404,00
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	3x1650	37°
3 = 3000 °K	3x1727	
4 = 4000 °K	3x1786	

©	Driver	
3KIT.350.1L (n° 3)	on/off	€ 21,00
3KIT.352.15 (n° 3)	DALI	€ 59,00
3KIT.353.15 (n° 3)	Push - 1...10V	€ 59,00
3KIT.354.18 (n° 3)	IGBT - Triac	€ 32,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 04 ø 8,0 trimless (for plasterboard and brickwork)

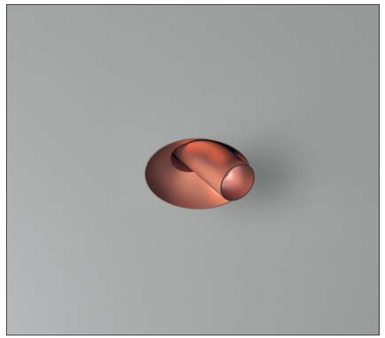

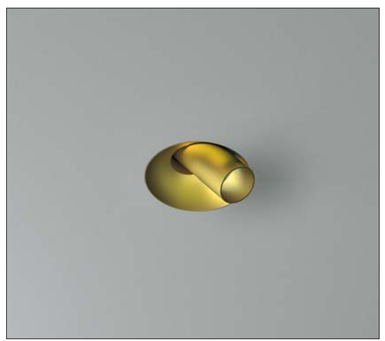

□	*Frame*
02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Finishes C1 and S1 are available from 30/09/2019



IP40 ©

350m/A	LED 13,4W	CRI>90
3P04.2 ■ S. □		€ 118,00
4P04.2 ■ S. □		€ 124,00
With honeycomb		

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	1650	25°
3 = 3000 °K	1727	
4 = 4000 °K	1786	

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-2)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

Housing for plasterboard ø 9,5cm

●	1Z00.080.01	Single	€ 33,00
●●	1Z00.080.2L	Double	€ 61,00
●●●	1Z00.080.3L	Triple	€ 89,00

easy Pop 04 Ø 8,0 with trim (for plasterboard and brickwork)

	Frame
02	Black
06	White
C1	Copper Anodized
S1	Brass Anodized

Finishes C1 and S1 are available from 30/09/2019



IP40		CE
350m/A	LED 13,4W	CRI>90
3E04.2 S.		€ 145,00
4E04.2 S.		€ 151,00
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1650	25°
3 = 3000 °K	1727	
4 = 4000 °K	1786	

(m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-2)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00



Housing for brickwork

1E00.080.01	€ 25,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 04 ø 12,0 trimless *(for plasterboard and brickwork)*



IP20 — CE

220V ÷ 240V

3P04.210.☐	GU10 max 50W	€	98,00
3P04.211.☐	GU10 led	€	98,00
4P04.211.☐	GU10 led	€	104,00
With honeycomb			

IP20 — CE

12V

3P04.220.☐	GU5.3 max 50W	€	90,00
4P04.220.☐	GU5.3 led	€	96,00
With honeycomb			
3KIT.201.050	*max 50VA*	€	32,00

Housing for plasterboard — ø 14,0cm

●	1Z00.120.01	Single	€	46,00
●●	1Z00.120.2L	Double	€	88,00
●●●	1Z00.120.3L	Triple ROS	€	125,00

Housing for brickwork

●	1M00.120.01		€	111,00

☐ *Frame*

02	●	Black
06	○	White

	Pop P04	P
3P04.210.☐	GU10	8,4
3P04.211.☐	GU10 led	—
4P04.211.☐	GU10 led + honeycomb	—
3P04.220.☐	GU5.3	6,8
4P04.220.☐	GU5.3 led + honeycomb	—



IP40 — MC-E=3 — CE

350m/A	LED 11W	CRI>90	
3P04.3■◪.☐		€	185,00
4P04.3■◪.☐		€	191,00
With honeycomb			

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700°K	1195	M = 38°
3 = 3000°K	1257	S = 22°
4 = 4000°K	1313	T = 12°

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/are	€	137,00

Housing for plasterboard — ø 14,0cm

●	1Z00.120.01	Single	€	46,00
●●	1Z00.120.2L	Double	€	88,00
●●●	1Z00.120.3L	Triple ROS	€	125,00

Housing for brickwork

●	1M00.120.01		€	111,00

	Pop P04	P	P1
3P04.3■M.☐	led IP40	6,8	2,5
3P04.3■S.☐	led IP40	6,8	5,5
3P04.3■T.☐	led IP40	6,8	2,5
4P04.3■M.☐	led IP40 + honeycomb	6,8	2,5
4P04.3■S.☐	led IP40 + honeycomb	7,4	5,5
4P04.3■T.☐	led IP40 + honeycomb	6,8	2,5

Pop 04A *Magic Ø 3,0 (only for plasterboard)*



IP40

350m/A	LED 13,4W	CRI>85
3P04A.2 M.		€ **225,00**
4P04A.2 M.		€ **231,00**
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	1650	35°
3 = 3000°K	1727	
4 = 4000°K	1786	

	© (m-M)	Driver	
3KIT.350.1L	(1-1)	on/off	€ **21,00**
3KIT.351.40	(1-2)	DALI - Push - 1...10V *Remote installation*	€ **105,00**
3KIT.352.15	(1-1)	DALI	€ **59,00**
3KIT.353.15	(1-1)	Push - 1...10V	€ **59,00**
3KIT.354.18	(1-1)	IGBT - TRIAC	€ **32,00**

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01	(1-1)	1:00 hour/ora	€ **95,00**
3KIT.900.03	(1-1)	3:00 hours/ore	€ **137,00**

☐ *Frame*

02 ● Black
06 ○ White

Housing for plasterboard

● **1W00.085.01** € **107,00**

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 04B *Magic Ø 3,0 (only for plasterboard)*

☐ *Frame*

02 ● Black
06 ○ White



IP40

350m/A	LED 13,4W	CRI>85
3P04B.2 M.		€ **231,00**
4P04B.2 M.		€ **237,00**
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	1650	35°
3 = 3000°K	1727	
4 = 4000°K	1786	

	© (m-M)	Driver	
3KIT.350.1L	(1-1)	on/off	€ **21,00**
3KIT.351.40	(1-2)	DALI - Push - 1...10V *Remote installation*	€ **105,00**
3KIT.352.15	(1-1)	DALI	€ **59,00**
3KIT.353.15	(1-1)	Push - 1...10V	€ **59,00**
3KIT.354.18	(1-1)	IGBT - TRIAC	€ **32,00**

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01	(1-1)	1:00 hour/ora	€ **95,00**
3KIT.900.03	(1-1)	3:00 hours/ore	€ **137,00**

Housing for plasterboard

● **1W00.085.01** € **107,00**

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 04C *Magic Ø 3,0 (only for plasterboard)*

IP40 ©		CE ▽
350m/A	LED 13,4W	CRI>85
3P04C.2■M.□		€ **386,00**
4P04C.2■M.□		€ **392,00**
With honeycomb		

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700°K	1650	35°
3 = 3000°K	1727	
4 = 4000°K	1786	

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ **21,00**
3KIT.351.40 (1-2)	DALI - Push - 1...10V *Remote installation*	€ **105,00**
3KIT.352.15 (1-1)	DALI	€ **59,00**
3KIT.353.15 (1-1)	Push - 1...10V	€ **59,00**
3KIT.354.18 (1-1)	IGBT - TRIAC	€ **32,00**

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour	€ **95,00**
3KIT.900.03 (1-1)	3:00 hours	€ **137,00**

Housing for plasterboard

●	**1W00.125.01**	€ **134,00**

□ *Frame*

02 ● Black
06 ○ White



(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 04K *Magic Ø 3,0 ceiling*

IP40 ©		CE ▽
220-240V	LED 13,4W	CRI>90
3P04K . 2■M.□	dimm. IGBT - TRIAC	€ **550,00**
4P04K . 2■M.□	dimm. IGBT - TRIAC	€ **556,00**
With honeycomb		
3P04KA2■M.□	DALI	€ **566,00**
4P04KA2■M.□	DALI	€ **572,00**
With honeycomb		
3P04KG2■M.□	Push - 1...10V	€ **566,00**
4P04KG2■M.□	Push - 1...10V	€ **572,00**
With honeycomb		

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700°K	1650	35°
3 = 3000°K	1727	
4 = 4000°K	1786	

□ *Frame*

02 ● Black
06 ○ White



(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 05 Ø 6,7 *(only for brickwork)* ROS

	Pop P05	P	P1
3P05.200.☐	GU4	8,5	2,5
3P05.2■S.☐	led	11,6	3,7

☐ *Frame*

02 ● Black
06 ○ White



IP20 — CE

12V

3P05.200.☐	GU4 max 35W	€ 49,00
3KIT.201.050	*max 50VA*	€ 32,00

Dimmable gear: IGBT

IP40 — CE

350m/A — LED 11W — CRI>90

3P05.2■S.☐ € 97,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	1195	22°
3 = 3000 °K	1257	
4 = 4000 °K	1313	

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

Housing for brickwork

● 1M00.067.01 € 10,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 05 Ø 8,2 *(only for brickwork)* ROS

	Pop P05	P	P1
3P05.210.☐	GU10	11,0	2,5
3P05.211.☐	GU10 led	—	2,5
3P05.220.☐	GU5.3	9,4	2,5
3P05.3■M.☐	led IP40	10,5	0,5
3P05.3■S.☐	led IP40	11,4	2,5
3P05.3■T.☐	led IP40	9,4	0,5
4P05.3■M.☐	led IP40 + honeycomb	11,0	0,5
4P05.3■S.☐	led IP40 + honeycomb	11,9	2,5
4P05.3■T.☐	led IP40 + honeycomb	9,9	0,5
3P05.3WM.☐	led IP40	6,8	0,5
3P05.3WS.☐	led IP40	8,8	2,5
4P05.3WM.☐	led IP40 + honeycomb	7,3	0,5
4P05.3WS.☐	led IP40 + honeycomb	9,3	2,5

☐ *Frame*

02 ● Black
06 ○ White



IP40 © — DimToWarm — CE

220V ÷ 240V — LED 6W CRI 95 — *Driver incluso*

3P05.3W◪◹.☐	dimm IGBT - TRIAC	€ 160,00
4P05.3W◪◹.☐	dimm IGBT - TRIAC	€ 166,00

With honeycomb

■ *Led color*	*Nominal lm*	*Beam spread*
W= max 3000°K min. 1800°K	max 445 lm min. 10 lm	M = 30° S = 18°

IP20 — CE

220V ÷ 240V

3P05.210.☐	GU10 max 50W	€ 59,00
3P05.211.☐	GU10 led	€ 59,00
4P05.211.☐	GU10 led	€ 65,00

With honeycomb

IP20 — CE

12V

3P05.220.☐	GU5.3 max 50W	€ 58,00
4P05.220.☐	GU5.3 led	€ 64,00

With honeycomb

3KIT.201.050	*max 50VA*	€ 32,00

Dimmable gear: IGBT

IP40 © — MC-E=3 — CE

350m/A — LED 11W — CRI>90

3P05.3■◪◹.☐	€ 107,00
4P05.3■◪◹.☐	€ 113,00

With honeycomb

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	1195	M = 38°
3 = 3000 °K	1257	S = 22°
4 = 4000 °K	1313	T = 10°

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

Housing for brickwork

● 1M00.082.01 € 10,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 05 Wing Ø 6,7 *(only for plasterboard)* ROS



	Pop PW05	P	P1
3PW05.200.☐	GU4	8,5	2,5
3PW05.201.☐	GU4 led	—	2,5
3PW05.3■S.☐	led	11,6	3,7

☐ *Frame*

02 ● Black
06 ○ White

IP20 ⓚ Ⓕ CE ▽ ⟐

12V

3PW05.200.☐	GU4 max 35W	€ 53,00
3KIT.201.050	*max 50VA*	€ 32,00

Dimmable gear: IGBT

IP40 ©

350m/A	LED 11W	CRI>90
3PW05.2■S.☐		€ 107,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700°K	1195	22°
3 = 3000°K	1257	
4 = 4000°K	1313	

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 05 Wing Ø 8,2 *(only for plasterboard)* ROS



	Pop PW05	P	P1
3PW05.210.☐	GU10	11,0	2,5
3PW05.211.☐	GU10 led	—	2,5
3PW05.220.☐	GU5.3	9,4	2,5
3PW05.3■M.☐	led IP40	10,5	0,5
3PW05.3■S.☐	led IP40	11,4	2,5
3PW05.3■T.☐	led IP40	9,4	0,5
4PW05.3■M.☐	led IP40 + honeycomb	11,0	0,5
4PW05.3■S.☐	led IP40 + honeycomb	11,9	2,5
4PW05.3■T.☐	led IP40 + honeycomb	9,9	0,5
3PW05.3WM.☐	led IP40	7,3	0,5
3PW05.3WS.☐	led IP40	9,3	2,5
4PW05.3WM.☐	led IP40 + honeycomb	7,3	0,5
4PW05.3WS.☐	led IP40 + honeycomb	9,3	2,5

☐ *Frame*

02 ● Black
06 ○ White

IP20 ⓚ CE ▽ ▣

220V ÷ 240V

3PW05.210.☐	GU10 max 50W	€ 65,00
3PW05.211.☐	GU10 led	€ 65,00
4PW05.211.☐	GU10 led	€ 71,00

With honeycomb

IP20 ⓚ Ⓕ CE ▽ ⟐

12V

3PW05.220.☐	GU5.3 max 50W	€ 64,00
4PW05.220.☐	GU5.3 led	€ 70,00

With honeycomb

3KIT.201.050	*max 50VA*	€ 32,00

Dimmable gear: IGBT

IP40 © MC-E=3 CE ▽ ⟐

350m/A	LED 11W	CRI>90
3PW05.3■◩◹.☐		€ 117,00
4PW05.3■◩◹.☐		€ 123,00

With honeycomb

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700°K	1195	M = 38°
3 = 3000°K	1257	S = 22°
4 = 4000°K	1313	T = 10°

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

IP40 © DimToWarm CE ▽ ⟐

220V ÷ 240V LED 6W CRI 95 *Driver incluso*

3PW05.3W◩◹.☐	dimm IGBT - TRIAC	€ 175,00
4PW05.3W◩◹.☐	dimm IGBT - TRIAC	€ 181,00

With honeycomb

■ *Led color*	*Nominal lm*	*Beam spread*
W= max 3000°K	max 445 lm	M = 30°
min. 1800°K	min. 10 lm	S = 18°

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop Ring *Dynamic Ø 13,1 (only for plasterboard)*



IP20 — 12V

3PR1D.530.□	G53 max 50W	€ 135,00 ▼
3KIT.201.050	*max 50VA*	€ 32,00

Dimmable gear: IGBT

IP20 — MC-E=3 — CRI>90 — 350 - 500 m/A

3PR1D.5■◩.□	€ 200,00 ▼

© (m-M)	LED 12,5W	350m/A	
3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700 °K	1477	L = 60°
3 = 3000 °K	1565	S = 24°
4 = 4000 °K	1635	T = 12°

© (m-M)	LED 18,4W	500m/A	
3KIT.500.1L (1-1)	on/off	€	21,00
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€	105,00
3KIT.502.20 (1-1)	DALI	€	59,00
3KIT.503.20 (1-1)	Push - 1...10V	€	59,00
3KIT.504.20 (1-1)	IGBT - TRIAC	€	32,00

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

□ *Frame*	
02 ●	Black
06 ○	White

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop Ring *Dynamic Ø 13,1 (only for plasterboard)*



IP40 — MC-E=3 — CRI>90 — 500 - 700 m/A

3PR1D.6■◩.□	€ 246,00

© (m-M)	LED 18,4W	500m/A	
3KIT.500.1L (1-1)	on/off	€	21,00
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€	105,00
3KIT.502.20 (1-1)	DALI	€	59,00
3KIT.503.20 (1-1)	Push - 1...10V	€	59,00
3KIT.504.20 (1-1)	IGBT - TRIAC	€	32,00

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700 °K	2020	M = 54°
3 = 3000 °K	2140	S = 26°
4 = 4000 °K	2236	T = 17°

© (m-M)	LED 27W	700m/A	
3KIT.700.1L (1-1)	on/off	€	24,00
3KIT.701.50 (1-1)	DALI - Push - 1...10V	€	105,00

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700 °K	2683	M = 54°
3 = 3000 °K	2842	S = 26°
4 = 4000 °K	2963	T = 17°

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

□ *Frame*	
02 ●	Black
06 ○	White

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop Ring *Dynamic Ø 13,1 (only for plasterboard)*



IP20 — 12V

3PR1D.530.□	GU5.3 max 50W	€	135,00 ▼
3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP20 — MC-E=3 — CRI>90

350 - 500 m/A

3PR1D.5■◩.□		€	200,00 ▼

© (m-M) — LED 12,5W — 350m/A

3KIT.350.1L (1-1)	on/off	€	21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€	105,00
3KIT.352.15 (1-1)	DALI	€	59,00
3KIT.353.15 (1-1)	Push - 1...10V	€	59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€	32,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1477	L = 60°
3 = 3000 °K	1565	S = 24°
4 = 4000 °K	1635	T = 12°

© (m-M) — LED 18,4W — 500m/A

3KIT.500.1L (1-1)	on/off	€	21,00
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€	105,00
3KIT.502.20 (1-1)	DALI	€	59,00
3KIT.503.20 (1-1)	Push - 1...10V	€	59,00
3KIT.504.20 (1-1)	IGBT - TRIAC	€	32,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

□ *Frame*

02	●	Black
06	○	White

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop Ring *Dynamic Ø 13,1 (only for plasterboard)*



IP40 — MC-E=3 — CRI>90

500 - 700 m/A

3PR1D.6■◩.□		€	246,00

© (m-M) — LED 18,4W — 500m/A

3KIT.500.1L (1-1)	on/off	€	21,00
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€	105,00
3KIT.502.20 (1-1)	DALI	€	59,00
3KIT.503.20 (1-1)	Push - 1...10V	€	59,00
3KIT.504.20 (1-1)	IGBT - TRIAC	€	32,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2020	L = 54°
3 = 3000 °K	2140	S = 26°
4 = 4000 °K	2236	T = 17°

© (m-M) — LED 27W — 700m/A

3KIT.700.1L (1-1)	on/off	€	24,00
3KIT.701.50 (1-1)	DALI - Push - 1...10V	€	105,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2683	L = 54°
3 = 3000 °K	2842	S = 26°
4 = 4000 °K	2963	T = 17°

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€	137,00

□ *Frame*

02	●	Black
06	○	White

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop Ring *Pull Ø 12,5 (only for plasterboard)*



IP20	MC-E=3	CE
350 m/A		CRI>90
3PR1P.5		€ 280,00 ▼

© (m-M)	LED 12,5W	350m/A
3KIT.350.1L (1-1)	on/off	€ 21,00
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€ 105,00
3KIT.352.15 (1-1)	DALI	€ 59,00
3KIT.353.15 (1-1)	Push - 1...10V	€ 59,00
3KIT.354.18 (1-1)	IGBT - TRIAC	€ 32,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	1477	L = 60°
3 = 3000 °K	1565	S = 24°
4 = 4000 °K	1635	T = 12°

	Frame
02 ●	Black
06 ○	White



IP20	MC-E=3	CE
500 m/A - 600 m/A		CRI>90
3PR1P.6		€ 325,00

© (m-M)	LED 18,4W	500m/A
3KIT.500.1L (1-1)	on/off	€ 21,00
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€ 105,00
3KIT.502.20 (1-1)	DALI	€ 59,00
3KIT.503.20 (1-1)	Push - 1...10V	€ 59,00
3KIT.504.20 (1-1)	IGBT - TRIAC	€ 32,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

© (m-M)	LED 23W	600m/A
3KIT.600.1L (1-1)	on/off	€ 24,00
3KIT.601.50 (1-1)	DALI - Push - 1...10V	€ 105,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	2228	L = 60°
3 = 3000 °K	2357	S = 24°
4 = 4000 °K	2455	T = 12°

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ 95,00
3KIT.900.03 (1-1)	3:00 hours/ore	€ 137,00

IP20		CE
12V		
3PR1P.530.	G53 max 50W	€ 199,00 ▼
3KIT.201.050	max 50VA	€ 32,00

Dimmable gear: IGBT

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 06 ø 6,0



IP20 ARC CE

220-240V

3P06A.210.☐ GU10 1x50W € **220,00**

IP20 Flicker < 20% CE MC-E=3

220-240V 9,5W CRI>90

3P06A.K■**S.**☐ dimm. IGBT - TRIAC € **270,00** ▼

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	710	24°
3 = 3000 °K	760	



IP20 CUP CE

220-240V

3P06.210.☐ GU10 1x50W € **220,00**

IP20 Flicker < 20% CE MC-E=3

220-240V 9,5W CRI>90

3P06.K■**S.**☐ dimm. IGBT - TRIAC € **270,00** ▼

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	710	24°
3 = 3000 °K	760	

☐ *Frame*

02 ● Black
06 ○ White

Pop 06 ø 12,0 ROS



IP54 ARC CE MC-E=3

220-240V 18,5W CRI>90

3P06A.5■**S.**☐ dimm. IGBT - TRIAC € **450,00** ▼

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	2683	24°
3 = 3000 °K	2842	
4 = 4000 °K	2963	



IP54 CUP CE MC-E=3

220-240V 18,5W CRI>90

3P06.5■**S.**☐ dimm. IGBT - TRIAC € **455,00** ▼

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	2683	24°
3 = 3000 °K	2842	
4 = 4000 °K	2963	

☐ *Frame*

02 ● Black
06 ○ White

Pop 06 Ø 6,0 bi-color

ARC: recessed canopy for plasterboard or wood ceiling - CUP: external canopy



IP20 ARC	Flicker < 20%	CE ▽ MC-E=3
220-240V	9,5W CRI>90	dimm. IGBT - TRIAC
3P06A.K■S.KS		€ 350,00
3P06A.K■S.WS		€ 350,00
3P06A.K■S.BS		€ 370,00
3P06A.K■S.GS		€ 370,00
3P06A.K■S.PS		€ 370,00
3P06A.K■S.RS		€ 370,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	710	24°
3 = 3000 °K	760	



IP20 CUP	Flicker < 20%	CE ▽ MC-E=3
220-240V	9,5W CRI>90	dimm. IGBT - TRIAC
3P06C.K■S.KS		€ 350,00
3P06C.K■S.WS		€ 350,00
3P06C.K■S.BS		€ 370,00 ▼
3P06C.K■S.GS		€ 370,00 ▼
3P06C.K■S.PS		€ 370,00 ▼
3P06C.K■S.RS		€ 370,00 ▼

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	710	24°
3 = 3000 °K	760	

☐	Up	Down		ARC	CUP	cable
KS	●	◐	Black/Brass	White	Black	Brass
WS	○	◐	White/Brass	White	White	Brass
BS	●	◐	Blue/Brass	White	Blue	Brass
GS	●	◐	Green/Brass	White	Green	Brass
PS	●	◐	Rose/Brass	White	Rose	Brass
RS	●	◐	Red/Brass	White	Red	Brass

Time delivery: 25 Working Days

Pop 06 Ø 12,0 bi-color

ARC: recessed canopy for plasterboard or wood ceiling - CUP: external canopy



IP20 © ARC	CE ▽ MC-E=3
220-240V 18,5W CRI>90	dimm. IGBT - TRIAC
3P06A.5■S.KS	€ 575,00
3P06A.5■S.WS	€ 575,00
3P06A.5■S.BS	€ 620,00
3P06A.5■S.GS	€ 620,00
3P06A.5■S.PS	€ 620,00
3P06A.5■S.RS	€ 620,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	2176	24°
3 = 3000 °K	2301	
4 = 4000 °K	2400	



IP20 © CUP	CE ▽ MC-E=3
220-240V 18,5W CRI>90	dimm. IGBT - TRIAC
3P06C.5■S.KS	€ 575,00
3P06C.5■S.WS	€ 575,00
3P06C.5■S.BS	€ 650,00
3P06C.5■S.GS	€ 650,00
3P06C.5■S.PS	€ 650,00
3P06C.5■S.RS	€ 650,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	2176	24°
3 = 3000 °K	2301	
4 = 4000 °K	2400	

☐	Up	Down		ARC	CUP	cable
KS	●	◐	Black/Brass	White	Black	Brass
WS	○	◐	White/Brass	White	White	Brass
BS	●	◐	Blue/Brass	White	Blue	Brass
GS	●	◐	Green/Brass	White	Green	Brass
PS	●	◐	Rose/Brass	White	Rose	Brass
RS	●	◐	Red/Brass	White	Red	Brass

Time delivery: 25 Working Days

Pop 07 Ø 6,0

IP20 ⓔ CE ▽

220-240V

3P07.210.□ GU10 1x50W € **94,00**

IP20 Flicker < 20% CE ▽ MC-E-3

220-240V 9,5W CRI>90

3P07.K■S.□ dimm. IGBT - TRIAC € **170,00** ▼

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	710	24°
3 = 3000 °K	760	

□	Frame
02	● Black
06	○ White

Pop 07 Ø 12,0 ROS

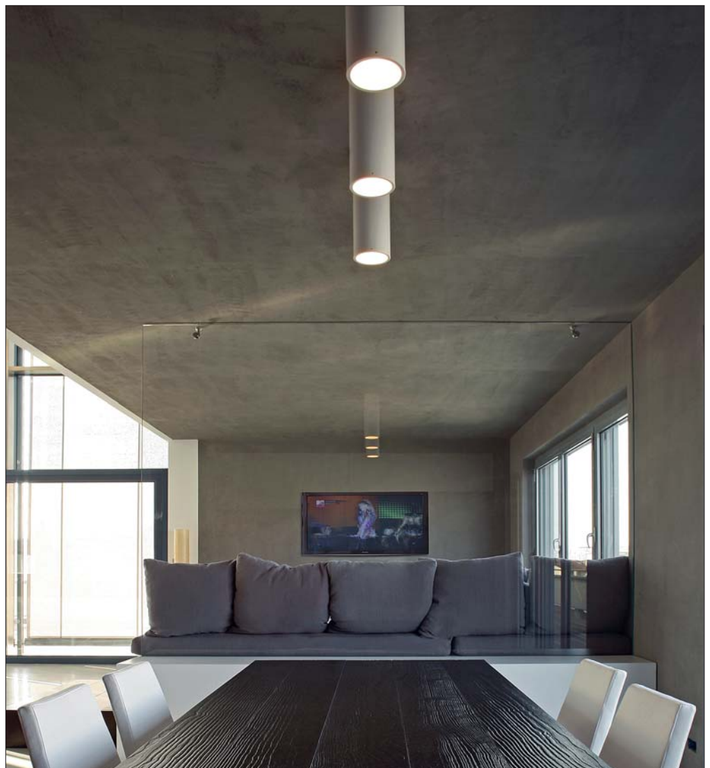

IP54 © CE ▽ MC-E-3

220-240V 18,5W CRI>90 dimm. IGBT - TRIAC

3P07.5■S.□ € **375,00**

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	2176	24°
3 = 3000 °K	2301	
4 = 4000 °K	2400	



□	Frame
02	● Black
06	○ White

Pop 07 Ø 6,0 bi-color



IP20	Flicker < 20%	CE ▽ MC-E=3
220-240V	9,5W CRI>90	dimm. IGBT - TRIAC
3P07.K S.KS		€ 175,00 ▼
3P07.K S.WS		€ 175,00 ▼
3P07.K S.BS		€ 190,00 ▼
3P07.K S.GS		€ 190,00 ▼
3P07.K S.PS		€ 190,00 ▼
3P07.K S.RS		€ 190,00 ▼

Led color	Nominal lm	Beam spread
2 = 2700 °K	710	24°
3 = 3000 °K	760	

☐ Up Down

KS	●	Black/Brass
WS	○	White/Brass
BS	●	Blue/Brass
GS	●	Green/Brass
PS	●	Rose/Brass
RS	●	Red/Brass

Time delivery: 25 Working Days

Pop 07 Ø 12,0 bi-color



IP20 ©		CE ▽ MC-E=3
220-240V	18,5W CRI>90	dimm. IGBT - TRIAC
3P07.5 S.KS		€ 415,00
3P07.5 S.WS		€ 415,00
3P07.5 S.BS		€ 450,00
3P07.5 S.GS		€ 450,00
3P07.5 S.PS		€ 450,00
3P07.5 S.RS		€ 450,00

IP20 ©		CE ▽ MC-E=3
220-240V	18,5W CRI>90	dimm. DALI
3P07A5 S.KS		€ 440,00
3P07A5 S.WS		€ 440,00
3P07A5 S.BS		€ 470,00
3P07A5 S.GS		€ 470,00
3P07A5 S.PS		€ 470,00
3P07A5 S.RS		€ 470,00

IP20 ©		CE ▽ MC-E=3
220-240V	18,5W CRI>90	dimm. Push
3P07B5 S.KS		€ 440,00
3P07B5 S.WS		€ 440,00
3P07B5 S.BS		€ 470,00
3P07B5 S.GS		€ 470,00
3P07B5 S.PS		€ 470,00
3P07B5 S.RS		€ 470,00

IP20 ©		CE ▽ MC-E=3
220-240V	18,5W CRI>90	dimm. 1...10V
3P07C5 S.KS		€ 440,00
3P07C5 S.WS		€ 440,00
3P07C5 S.BS		€ 470,00
3P07C5 S.GS		€ 470,00
3P07C5 S.PS		€ 470,00
3P07C5 S.RS		€ 470,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	2176	24°
3 = 3000 °K	2301	
4 = 4000 °K	2400	

☐ Up Down

KS	●	Black/Brass
WS	○	White/Brass
BS	●	Blue/Brass
GS	●	Green/Brass
PS	●	Rose/Brass
RS	●	Red/Brass

Time delivery: 25 Working Days

Pop 07 **small Bulb** *Ceiling*



IP20 | CE

220V ÷ 240V	e27 4W	CRI>80
3P07.A2L.☐	dimm. IGBT - TRIAC	€ **75,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	470	360°

☐	*Frame*	*Bulb*
02	Black	Transparent
06	White	Transparent
C1	Copper Anodized	Transparent
S1	Brass Anodized	Transparent

Available from 30/09/2019

Pop 07 **small Bulb** *ceiling/wall*

IP20 | CE

220V ÷ 240V	e27 7W	CRI>80
3P07.A2L.☐	dimm. IGBT - TRIAC	€ **80,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	806	180°

☐	*Frame*	*Bulb*
02M	Black	Mirror Chrome
06M	White	Mirror Chrome
C1C	Copper Anodized	Mirror Copper
S1S	Brass Anodized	Mirror Brass

Available from 30/09/2019

Pop 07 **big Bulb** *Ceiling*



IP20 | CE

220V ÷ 240V	e27 4W	CRI>80
3P07.B2L.☐	dimm. IGBT - TRIAC	€ **85,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	470	360°

☐	*Frame*	*Bulb*
02	Black	Transparent
06	White	Transparent
C1	Copper Anodized	Transparent
S1	Brass Anodized	Transparent

Available from 30/09/2019

Pop 07 **big Bulb** *ceiling/wall*

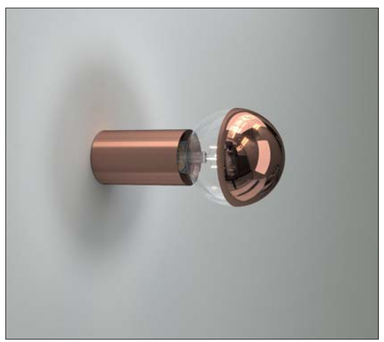



IP20 | CE

220V ÷ 240V	e27 7W	CRI>80
3P07.B2L.☐	dimm. IGBT - TRIAC	€ **90,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	806	180°

☐	*Frame*	*Bulb*
02M	Black	Mirror Chrome
06M	White	Mirror Chrome
C1C	Copper Anodized	Mirror Copper
S1S	Brass Anodized	Mirror Brass

Available from 30/09/2019

Pop X7 *Ø 11,2*



IP20 ⚿ CE ▽

220V ÷ 240V

3PX7.211.□	GU10 led	€ **180,00**
4PX7.211.□	GU10 led	€ **186,00**

With honeycomb

IP40 CE ▽ MC-E=3

220-240V 9,5W CRI>90 dimm. IGBT - TRIAC

3PX7.K■◪◥.□		€ **215,00**
4PX7.K■◪◥.□		€ **221,00**

With honeycomb

■ Led color	*Nominal lm*	*◪ Beam spread*
2 = 2700 °K	834	M = 36°
3 = 3000 °K	877	S = 24°

□ Frame	
02	Block
06	White
C1	Copper Anodized
S1	Brass Anodized

Available from 30/09/2019

Time delivery: 25 Working Days

Pop W7



IP20		CE
220-240V		
3PW7.211.□	GU10 led	€ 375,00
4PW7.211.□	GU10 led	€ 387,00
With honeycomb		

IP20		CE MC-E=3
2220-240V	2x9,5W CRI>90	dimm. IGBT - TRIAC
3PW7.K■◢.□		€ 410,00
4PW7.K■◢.□		€ 426,00
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2 = 2700°K	834	M = 36°
3 = 3000°K	877	S = 24°

□	*Out*	*In*
02	Black	Black
KC1	Black	Copper Anodized
KS1	Black	Brass Anodized
06	White	White
WC1	White	Copper Anodized
WS1	White	Brass Anodized

Available from 30/09/2019

Time delivery: 25 Working Days

Pop 07 *Dynamic Ø 12,5* ROS



IP20 ©		CE ▽ MC-E=3
220-240V	18,5W	CRI>90
3P07D . 5■◪.□	IGBT Triac	€ **330,00** ▼
3P07D A5■◪.□	DALI	€ **420,00**
3P07D G5■◪.□	Push - 1...10V	€ **420,00**

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

□ *Frame*

02	●	Black
06	○	White

Pop 07 *Pull Ø 12,5*

□ *Frame*

02	●	Black
06	○	White

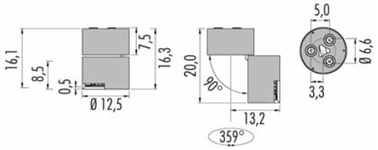

IP20 ©		CE ▽ MC-E=3
220-240V	18,4W	CRI>90
3P07P . 5■◪.□	IGBT Triac	€ **375,00** ▼
3P07P A5■◪.□	DALI	€ **440,00**
3P07P G5■◪.□	Push - 1...10V	€ **440,00**

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	2176	L = 60°
3 = 3000 °K	2301	S = 24°
4 = 4000 °K	2400	T = 12°

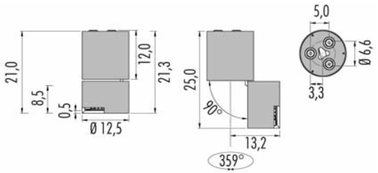

IP20 ©		CE ▽ MC-E=3
220-240V	23W	CRI>90
3P07P . 6■◪.□	on/off	€ **399,00** ▼
3P07P A6■◪.□	DALI	€ **440,00**
3P07P G6■◪.□	Push - 1...10V	€ **440,00**

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	2228	L = 60°
3 = 3000 °K	2357	S = 24°
4 = 4000 °K	2455	T = 12°

IP20 Ⓣ Ⓓ		CE ▽
220-240V	G53 1x50W	
3P07P.530.□		€ **290,00** ▼

Pop 10 *trimless (for plasterboard and brickwork)*



Code		P
3P10.210.□	GU10	9,2
3P10.211.□	GU10 Led	—
3P10.220.□	GU5.3	8,4
3P10.3■S.□	350m/A led	12,6

□ *Frame*

02 ● Black
06 ○ White

IP20 — CE

220V ÷ 240V

3P10.210.□	GU10 max 50W	€	64,00
3P10.211.□	GU10 led	€	64,00

IP20 — CE

12V

3P10.220.□	GU5.3 max 50W	€	59,00
3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

ONLY in the plasterboard ceiling to obtain wall - washed effects

IP20 — CE

350m/A	LED 11W	CRI>90
3P10.3■S.□		€ 120,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700°K	1195	24°
3 = 3000°K	1257	
4 = 4000°K	1313	

©	(m-M)	Driver		
3KIT.350.1L	(1-1)	on/off	€	21,00
3KIT.351.40	(1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15	(1-1)	DALI	€	59,00
3KIT.353.15	(1-1)	Push - 1...10V	€	59,00
3KIT.354.18	(1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01	(1-1)	1:00 hour/ora	€	95,00
3KIT.900.03	(1-1)	3:00 hours/ore	€	137,00

Housing for plasterboard

●	1Z00.070.01	€	52,00

Housing for brickwork

●	1M00.070.01	€	91,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 11 *trimless (only for plasterboard)*

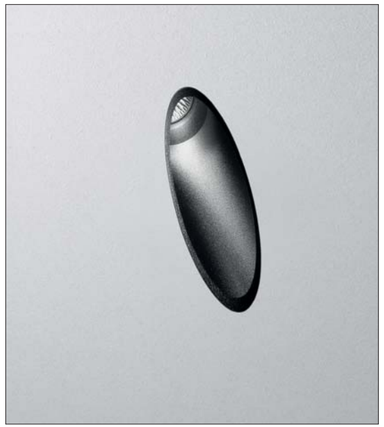



□ *Frame*

02 ● Black
06 ○ White

IP20 — CE

12V

3P11.200.□	GU4 1x35W	€	75,00
3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP20 — CE

700m/A	LED 2,4W	CRI>80
3P11.3■M.□	2,4W	€ 118,00

■ *Led color*	*Nominal lm*	*Beam spread*
3 = 3000°K	137	25°
4 = 4000°K	160	

©	(m-M)	Driver 700m/A		
3KIT.700.12	(1-3)	on/off	€	27,00
3KIT.700.32	(1-9)	on/off	€	51,00
3KIT.701.50	(1-14)	DALI Push - 1...10V	€	105,00

Housing for plasterboard

●	1Z00.043.01	€	100,00

Ceiling installation to obtain wall - washed effects



H ▶ Ø cm. *P11.200.□ = GU4 (30°)*



H ▶ Ø cm. *P11.3■M.XX = LED*



Pop P12 Ø 3,0 trimless *(for plasterboard and brickwork)*



IP20 ©

350m/A	LED 13,4W	CRI>90	
3P12.2 M. ☐		€	**236,00**
4P12.2 M. ☐		€	**242,00**
With honeycomb			

Led color	*Nominal lm*	*Beam spread*
2700 °K	1650	35°
3000 °K	1727	
4000 °K	1786	

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	**21,00**
3KIT.351.40 (1-2)	DALI - Push - 1...10V *Remote installation*	€	**105,00**
3KIT.352.15 (1-1)	DALI	€	**59,00**
3KIT.353.15 (1-1)	Push - 1...10V	€	**59,00**
3KIT.354.18 (1-1)	IGBT - TRIAC	€	**32,00**

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	**95,00**
3KIT.900.03 (1-1)	3:00 hours/ore	€	**137,00**

Housing for plasterboard

● **1Z00.080.01**	Ø 9,5cm	€	**33,00**

Housing for brickwork

● **1M00.080.01**		€	**96,00**

☐ *Frame*

02	●	Black
06	○	White

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop P12 T Ø 3,0 with trim *(only for plasterboard)*



IP20 ©

350m/A	LED 13,4W	CRI>90	
3P12T.2 M. ☐		€	**236,00**
4P12T.2 M. ☐		€	**242,00**
With honeycomb			

Led color	*Nominal lm*	*Beam spread*
2700 °K	1650	35°
3000 °K	1727	
4000 °K	1786	

© (m-M)	Driver		
3KIT.350.1L (1-1)	on/off	€	**21,00**
3KIT.351.40 (1-2)	DALI - Push - 1...10V *Remote installation*	€	**105,00**
3KIT.352.15 (1-1)	DALI	€	**59,00**
3KIT.353.15 (1-1)	Push - 1...10V	€	**59,00**
3KIT.354.18 (1-1)	IGBT - TRIAC	€	**32,00**

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	**95,00**
3KIT.900.03 (1-1)	3:00 hours/ore	€	**137,00**

☐ *Frame*

02	●	Black
06	○	White

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop P12/L Ø 3,0 trimless *(only for plasterboard)*

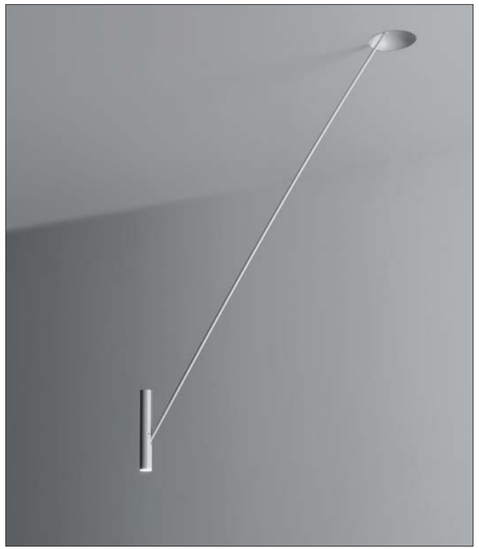



IP20 ©		CE ▽
350m/A	LED 13,4W	CRI>90
3P12L.2 M.		€ **386,00**
4P12L.2 M.		€ **392,00**
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2700 °K	1650	35°
3000 °K	1727	
4000 °K	1786	

	© (m-M)	Driver	
3KIT.350.1L	(1-1)	on/off	€ **21,00**
3KIT.351.40	(1-2)	DALI - Push - 1...10V *Remote installation*	€ **105,00**
3KIT.352.15	(1-1)	DALI	€ **59,00**
3KIT.353.15	(1-1)	Push - 1...10V	€ **59,00**
3KIT.354.18	(1-1)	IGBT - TRIAC	€ **32,00**

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01	(1-1)	1:00 hour/ora	€ **95,00**
3KIT.900.03	(1-1)	3:00 hours/ore	€ **137,00**

☐	*Frame*
02 ●	Black
06 ○	White

Housing for plasterboard with 1,2cm max thickness

●	**1W00.125.01**	Ø12,5cm	€ **134,00**

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop P12/K Ø 3,0 ceiling



☐	*Frame*
02 ●	Black
06 ○	White

IP20 ©		CE ▽
220-240V	LED 13,4W	CRI>90
3P12K.2 M.	dimm. IGBT - TRIAC	€ **541,00**
4P12K.2 M.	dimm. IGBT - TRIAC	€ **547,00**
With honeycomb		
3P12KA2 M.	DALI	€ **560,00**
4P12KA2 M.	DALI	€ **566,00**
With honeycomb		
3P12KG2 M.	Push - 1...10V	€ **560,00**
4P12KG2 M.	Push - 1...10V	€ **566,00**
With honeycomb		

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1650	35°
3 = 3000 °K	1727	
4 = 4000 °K	1786	

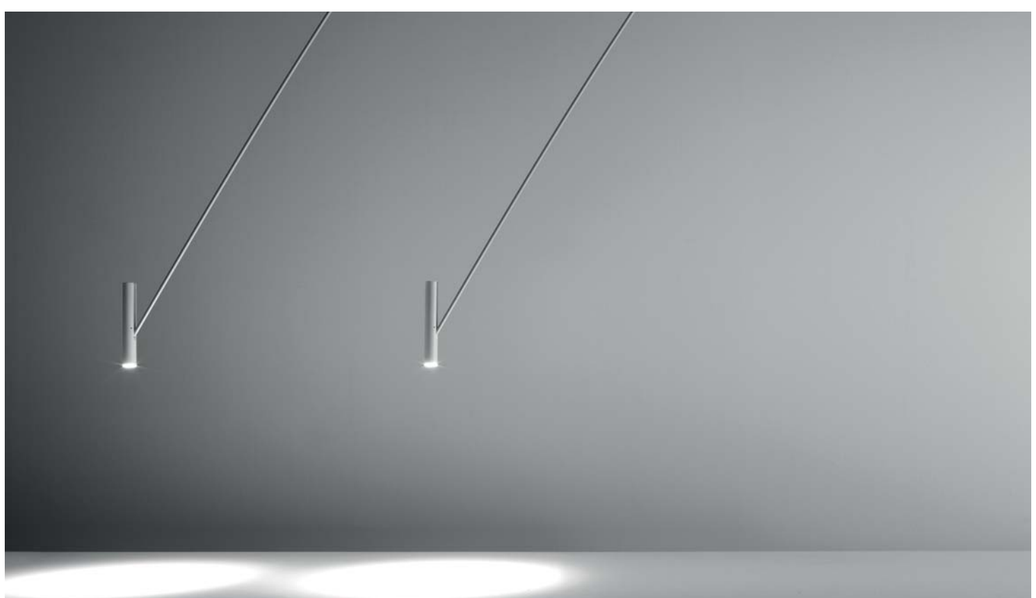

Pop P12 Ø 7,0 trimless *(for plasterboard and brickwork)*



Code		Ø	P
3P12.210.☐	GU10	7,0	5,0
3P12.220.☐	GU5.3	7,0	5,0
3P12.3■M.☐	led	7,0	0,5
3P12.3■S.☐	led	7,0	5,0
3P12.3■T.☐	led	7,0	0,5
4P12.3■M.☐	led + honeycomb	7,0	0,5
4P12.3■S.☐	led + honeycomb	7,0	5,0
4P12.3■T.☐	led + honeycomb	7,0	0,5

☐ *Frame*

02	●	Black
06	○	White

IP20 — CE

220V ÷ 240V

3P12.210.☐	GU10 max 50W	€	198,00

IP20 — CE

12V

3P12.220.☐	GU5.3 max 50W	€	193,00
3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP20 — MC-E=3 — CE

350m/A — LED 11W — CRI>90

3P12.3■■.☐		€	246,00
4P12.3■■.☐		€	252,00

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1195	M = 38°
3 = 3000 °K	1257	S = 22°
4 = 4000 °K	1313	T = 10°

	© (m-M)	Driver		
3KIT.350.1L	(1-1)	on/off	€	21,00
3KIT.351.40	(1-3)	DALI - Push - 1...10V *Remote installation*	€	105,00
3KIT.352.15	(1-1)	DALI	€	59,00
3KIT.353.15	(1-1)	Push - 1...10V	€	59,00
3KIT.354.18	(1-1)	IGBT - TRIAC	€	32,00

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01	(1-1)	1:00 hour/ora	€	95,00
3KIT.900.03	(1-1)	3:00 hours/ore	€	137,00

Housing for plasterboard — Ø 14,0cm

●	1Z00.120.01	Single	€	46,00
●●	1Z00.120.2L	Double	€	88,00
●●●	1Z00.120.3L	Triple	€	125,00

Housing for brickwork

●	1M00.120.01	€	111,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop P12 Ø 12,5 trimless *(for plasterboard and brickwork)*



☐ *Frame*

02	●	Black
06	○	White

IP20 — CE

12V

3P12.530.☐	G53 max 50W	€	193,00
3KIT.201.050	*max 50VA*	€	32,00

Dimmable gear: IGBT

IP40 — MC-E=3 — CE

350 - 500 - 700 m/A — CRI>90

3P12.6■■.☐		€	260,00 ▼

	© (m-M)	LED 12,5W	350m/A		
3KIT.350.1L	(1-1)	on/off		€	21,00
3KIT.351.40	(1-3)	DALI - Push - 1...10V		€	105,00
3KIT.352.15	(1-1)	DALI		€	59,00
3KIT.353.15	(1-1)	Push - 1...10V		€	59,00
3KIT.354.18	(1-1)	IGBT - TRIAC		€	32,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1477	L = 60°
3 = 3000 °K	1565	S = 24°
4 = 4000 °K	1635	T = 12°

	© (m-M)	LED 18,4W	500m/A		
3KIT.500.1L	(1-1)	on/off		€	21,00
3KIT.501.50	(1-3)	DALI - Push - 1...10V		€	105,00
3KIT.502.20	(1-1)	DALI		€	59,00
3KIT.503.20	(1-1)	Push - 1...10V		€	59,00
3KIT.504.20	(1-1)	IGBT - TRIAC		€	32,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

	© (m-M)	LED 27W	700m/A		
3KIT.700.1L	(1-1)	on/off		€	24,00
3KIT.701.50	(1-1)	DALI - Push - 1...10V		€	105,00

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2683	L = 60°
3 = 3000 °K	2842	S = 24°
4 = 4000 °K	2963	T = 12°

Housing for plasterboard — Ø 14,0cm

●	1Z00.120.01	Single	€	46,00
●●	1Z00.120.2L	Double	€	88,00
●●●	1Z00.120.3L	Triple	€	125,00

Housing for brickwork

●	1M00.120.01	€	111,00

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Pop 12 Ring ø 3,0 recessed *(only for plasterboard)*

IP20	MC-E=3	CE
500 m/A	6W	CRI>90
3PR12.2 S.		€ **230,00**
4PR12.2 S.		€ **236,00**
With honeycomb		

Led color	Nominal lm	Beam spread
2 = 2700 °K	528	S = 24°
3 = 3000 °K	552	
4 = 4000 °K	594	

	(m-M)	Driver	
3KIT.500.15	(1-1)	on/off	€ **27,00**
3KIT.501.50	(1-7)	DALI - Push - 1...10V *Remote installation*	€ **105,00**
3KIT.502.20	(1-3)	DALI	€ **59,00**
3KIT.503.20	(1-3)	Push - 1...10	€ **59,00**
3KIT.504.10	(1-1)	IGBT - TRIAC	€ **32,00**



	Frame	Ring
02	Black	Black
06	White	White
KC	Black	Copper Anodized
KS	Black	Brass Anodized
WC	White	Copper Anodized
WS	White	Brass Anodized

Time delivery: 15 Working Days

Pop 12 Cup ø 3,0 wall/ceiling

IP20	MC-E=3	CE
500 m/A	6W	CRI>90
3PC12.2 S.		€ **250,00**
4PC12.2 S.		€ **256,00**
With honeycomb		

Led color	Nominal lm	Beam spread
2 = 2700 °K	528	S = 24°
3 = 3000 °K	552	
4 = 4000 °K	594	

	(m-M)	*Driver ONLY in remote installation*	
3KIT.500.15	(1-1)	on/off	€ **27,00**
3KIT.501.50	(1-7)	DALI - Push - 1...10V	€ **105,00**
3KIT.502.20	(1-3)	DALI	€ **59,00**
3KIT.503.20	(1-3)	Push - 1...10	€ **59,00**
3KIT.504.10	(1-1)	IGBT - TRIAC	€ **32,00**



	Frame	Ring
02	Black	Black
06	White	White
KC	Black	Copper Anodized
KS	Black	Brass Anodized
WC	White	Copper Anodized
WS	White	Brass Anodized

Time delivery: 15 Working Days

Pop 12 Ring ø 6,0 recessed *(only for plasterboard)*

IP20	MC-E=3	CRI>90
350m/A	11W	
3PR12.3■◩.□		€ **230,00**
4PR12.3■◩.□		€ **236,00**

With honeycomb, only for S (22°) and T (10°)

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700°K	1195	M = 38°
3 = 3000°K	1257	S = 22°
4 = 4000°K	1313	T = 10°

© (m-M)	Driver	
3KIT.350.1L (1-1)	on/off	€ **21,00**
3KIT.351.40 (1-3)	DALI - Push - 1...10V *Remote installation*	€ **105,00**
3KIT.352.15 (1-1)	DALI	€ **59,00**
3KIT.353.15 (1-1)	Push - 1...10V	€ **59,00**
3KIT.354.18 (1-1)	IGBT - TRIAC	€ **32,00**



□	*Frame*	*Ring*
02	Black	Black
06	White	White
KC	Black	Copper Anodized
KS	Black	Brass Anodized
WC	White	Copper Anodized
WS	White	Brass Anodized

Time delivery: 15 Working Days

Pop 12 Cup ø 6,0 wall/ceiling

IP20	MC-E=3	CRI>90
350m/A	11W	
3PC12.3■◩.□		€ **250,00**
4PC12.3■◩.□		€ **256,00**

With honeycomb, only for S (22°) and T (10°)

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700°K	1195	M = 38°
3 = 3000°K	1257	S = 22°
4 = 4000°K	1313	T = 10°

© (m-M)	*Driver ONLY in remote installation*	
3KIT.350.1L (1-1)	on/off	€ **21,00**
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€ **105,00**
3KIT.352.15 (1-1)	DALI	€ **59,00**
3KIT.353.15 (1-1)	Push - 1...10V	€ **59,00**
3KIT.354.18 (1-1)	IGBT - TRIAC	€ **32,00**



□	*Frame*	*Ring*
02	Black	Black
06	White	White
KC	Black	Copper Anodized
KS	Black	Brass Anodized
WC	White	Copper Anodized
WS	White	Brass Anodized

Time delivery: 15 Working Days

Pop 12 Ring ø 12,0 recessed (only for plasterboard)



	Frame	Ring
02	Black	Black
06	White	White
KC	Black	Copper Anodized
KS	Black	Brass Anodized
WC	White	Copper Anodized
WS	White	Brass Anodized

Time delivery: 15 Working Days

IP40 — MC-E=3 — CE

350 - 500 - 700 m/A — CRI>90

3PR12.6 ■◭.□ — € **325,00**

Driver ONLY in remote installation

© (m-M)	LED 12,5W	350m/A	
3KIT.350.1L (1-1)	on/off	€	**21,00**
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€	**105,00**
3KIT.352.15 (1-1)	DALI	€	**59,00**
3KIT.353.15 (1-1)	Push - 1...10V	€	**59,00**
3KIT.354.18 (1-1)	IGBT - TRIAC	€	**32,00**

■ Led color	Nominal lm	◭ Beam spread
2 = 2700 °K	1578	L = 60°
3 = 3000 °K	1669	S = 24°
4 = 4000 °K	1740	T = 12°

© (m-M)	LED 18,4W	500m/A	
3KIT.500.1L (1-1)	on/off	€	**21,00**
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€	**105,00**
3KIT.502.20 (1-1)	DALI	€	**59,00**
3KIT.503.20 (1-1)	Push - 1...10V	€	**59,00**
3KIT.504.20 (1-1)	IGBT - TRIAC	€	**32,00**

■ Led color	Nominal lm	◭ Beam spread
2 = 2700 °K	2176	L = 60°
3 = 3000 °K	2301	S = 24°
4 = 4000 °K	2400	T = 12°

© (m-M)	LED 27W	700m/A	
3KIT.700.1L (1-1)	on/off	€	**24,00**
3KIT.701.50 (1-1)	DALI - Push - 1...10V	€	**105,00**

■ Led color	Nominal lm	◭ Beam spread
2 = 2700 °K	2914	L = 60°
3 = 3000 °K	3081	S = 24°
4 = 4000 °K	3213	T = 12°

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Qty srl.

Pop 12 Cup ø 12,0 wall/ceiling



	Frame	Ring
02	Black	Black
06	White	White
KC	Black	Copper Anodized
KS	Black	Brass Anodized
WC	White	Copper Anodized
WS	White	Brass Anodized

Time delivery: 15 Working Days

IP40 — MC-E=3 — CE

350 - 500 - 700 m/A — CRI>90

3PC12.6 ■◭.□ — € **335,00**

Driver ONLY in remote installation

© (m-M)	LED 12,5W	350m/A	
3KIT.350.1L (1-1)	on/off	€	**21,00**
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€	**105,00**
3KIT.352.15 (1-1)	DALI	€	**59,00**
3KIT.353.15 (1-1)	Push - 1...10V	€	**59,00**
3KIT.354.18 (1-1)	IGBT - TRIAC	€	**32,00**

■ Led color	Nominal lm	◭ Beam spread
2 = 2700 °K	1578	L = 60°
3 = 3000 °K	1669	S = 24°
4 = 4000 °K	1740	T = 12°

© (m-M)	LED 18,4W	500m/A	
3KIT.500.1L (1-1)	on/off	€	**21,00**
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€	**105,00**
3KIT.502.20 (1-1)	DALI	€	**59,00**
3KIT.503.20 (1-1)	Push - 1...10V	€	**59,00**
3KIT.504.20 (1-1)	IGBT - TRIAC	€	**32,00**

■ Led color	Nominal lm	◭ Beam spread
2 = 2700 °K	2176	L = 60°
3 = 3000 °K	2301	S = 24°
4 = 4000 °K	2400	T = 12°

© (m-M)	LED 27W	700m/A	
3KIT.700.1L (1-1)	on/off	€	**24,00**
3KIT.701.50 (1-1)	DALI - Push - 1...10V	€	**105,00**

■ Led color	Nominal lm	◭ Beam spread
2 = 2700 °K	2914	L = 60°
3 = 3000 °K	3081	S = 24°
4 = 4000 °K	3213	T = 12°

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Qty srl.

Polifemo PF1



IP20 © MC-E-3 CE

100-240V 11W CRI>90 dimmable

3PF1.3 ■ S.□ € 500,00

4PF1.3 ■ S.□ € 506,00

With honeycomb

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700°K	1195	22°
3 = 3000°K	1257	
4 = 4000°K	1313	



IP20 © MC-E-3 CE

100-240V 11W CRI>90 dimmable

3PF2.3 ■ S.□ € 650,00

4PF2.3 ■ S.□ € 656,00

With honeycomb

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700°K	1195	22°
3 = 3000°K	1257	
4 = 4000°K	1313	

□	*Frame*	*Ring*
KC	Black	Copper Anodized
KS	Black	Brass Anodized
WC	White	Copper Anodized
WS	White	Brass Anodized

Time delivery: 25 Working days

Polifemo PF2

Pop 13 Ø 7,0 wall/ceiling



	Frame
02	Black
06	White

IP20		CE
220-240V	GU10 1x50W	P=5,0
3P13.210.□		€ 255,00

IP20		CE
220-240V	GU5.3 1x50W	P=5,0
3P13.220.□		€ 273,00

IP20 ©		CE MC-E=3
220-240V	11W	CRI>90
3P13.3■◪.□	IGBT Triac	€ 354,00
4P13.3■◪.□ *With honeycomb*	IGBT Triac	€ 360,00
3P13A3■◪.□	DALI	€ 370,00
4P13A3■◪.□ *With honeycomb*	DALI	€ 376,00
3P13G3■◪.□	Push - 1...10V	€ 370,00
4P13G3■◪.□ *With honeycomb*	Push - 1...10V	€ 376,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	1119	M = 38° (P=0,5)
3 = 3000 °K	1257	S = 22° (P=5,0)
4 = 4000 °K	1313	T = 10° (P=0,5)



Installation kit on beams and horizontal surfaces

1KIT.P136.□ € 24,00

Pop 13 Ø 12,5 wall/ceiling



	Frame
02	Black
06	White

IP20		CE
220-240V	G53 1x50W	
3P13.530.□		€ 289,00

IP20 ©		CE MC-E=3
220-240V	12,5W	CRI>90
3P13.4■◪.□	IGBT Triac	€ 360,00 ▼
3P13A4■◪.□	DALI	€ 430,00
3P13G4■◪.□	Push - 1...10V	€ 430,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	1477	L = 60°
3 = 3000 °K	1565	S = 24°
4 = 4000 °K	1635	T = 12°

IP20 ©		CE MC-E=3
220-240V	18,5W	CRI>90
3P13.5■◪.□	IGBT Triac	€ 360,00 ▼
3P13A5■◪.□	DALI	€ 430,00
3P13G5■◪.□	Push - 1...10V	€ 430,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

IP20 ©		CE MC-E=3
220-240V	27W	CRI>90
3P13.6■◪.□	on/off	€ 360,00 ▼
3P13E6■◪.□	DALI - Push	€ 430,00
3P13C6■◪.□	1...10V	€ 430,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	2683	L = 60°
3 = 3000 °K	2842	S = 24°
4 = 4000 °K	2963	T = 12°



Installation kit on beams and horizontal surfaces

1KIT.P136.□ € 24,00

Pop 14 Ø 3,0 *for 230 voltage 3~ circuit Eutrac*



IP20 ©

220-240V	13,4W	CRI>90
3P14.2■M.□	on/off	€ 310,00 ▼
4P14.2■M.□	on/off	€ 316,00 ▼

With honeycomb

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	1650	35°
3 = 3000 °K	1727	
4 = 4000 °K	1786	

□	*Frame*
02	Black
06	White

Pop 14 Ø 7,0 *for 230 voltage 3~ circuit Eutrac*



IP20 Ⓚ Ⓣ

220-240V	GU5.3 50W	*P=5,0*
3P14.220.□		€ 295,00 ▼

IP20 ©

220-240V	11W	CRI>90
3P14.3■◩◹.□	IGBT Triac	€ 329,00 ▼
4P14.3■◩◹.□	IGBT Triac	€ 335,00 ▼

With honeycomb

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700 °K	1119	M = 38° *(P=0,5)*
3 = 3000 °K	1257	S = 22° *(P=5,0)*
4 = 4000 °K	1313	T = 10° *(P=0,5)*

□	*Frame*
02	Black
06	White

Pop 14 Ø 12,5 *for 230 voltage 3~ circuit Eutrac*

□	*Frame*
02	Black
06	White



IP20 Ⓚ Ⓣ

220-240V	G53 50W	
3P14.530.□		€ 305,00 ▼

IP20 ©

220-240V	18,5W	CRI>90
3P14.5■◩◹.□	IGBT Triac	€ 379,00 ▼

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

IP20 ©

220-240V	27W	CRI>90
3P14.6■◩◹.□	on/off	€ 379,00 ▼

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700 °K	2683	L = 60°
3 = 3000 °K	2842	S = 24°
4 = 4000 °K	2963	T = 12°

Pop 15 Ø 3,0 *for 48V track Eutrac*



IP20 — CE — MC-E=3

48V	13,4W	CRI>90
3P15.2■M.□	on/off	€ **230,00**
4P15.2■M.□	on/off	€ **236,00**

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1650	35°
3 = 3000 °K	1727	
4 = 4000 °K	1786	

Electronic Gear in remote position
Dimmable on demand

3KIT.048.120	on/off 0 ~ 5A	€ **83,00**
3KIT.048.240	on/off 0 ~ 10A	€ **170,00**

□ *Frame*

02 ●	Black
06 ○	White

Pop 15 Ø 7,0 *for 48V track Eutrac*



IP20 — CE — MC-E=3

48V	11W	CRI>90
3P15.3■■.□	on/off	€ **285,00**
4P15.3■■.□	on/off	€ **291,00**

With honeycomb

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	1119	M = 38° *(P=0,5)*
3 = 3000 °K	1257	S = 22° *(P=5,0)*
4 = 4000 °K	1313	T = 10° *(P=0,5)*

Electronic Gear in remote position
Dimmable on demand

3KIT.048.120	on/off 0 ~ 5A	€ **83,00**
3KIT.048.240	on/off 0 ~ 10A	€ **170,00**

□ *Frame*

02 ●	Black
06 ○	White

Pop 15 Ø 12,5 *for 48V track Eutrac*

IP20 — CE — MC-E=3

48V	18,5W	CRI>90
3P15.5■■.□	on/off	€ **319,00** ▼

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2020	L = 60°
3 = 3000 °K	2140	S = 24°
4 = 4000 °K	2236	T = 12°

IP20 — CE — MC-E=3

48V	27W	CRI>90
3P15.6■■.□	on/off	€ **319,00** ▼

Led color	*Nominal lm*	*Beam spread*
2 = 2700 °K	2683	L = 60°
3 = 3000 °K	2842	S = 24°
4 = 4000 °K	2963	T = 12°

Electronic Gear in remote position
Dimmable on demand

3KIT.048.120	on/off 0 ~ 5A	€ **83,00**
3KIT.048.240	on/off 0 ~ 10A	€ **170,00**

□ *Frame*

02 ●	Black
06 ○	White



Pop P16 Pull 16,0 h. for 230 voltage 3~ circuit Eutrac



IP20 © CE ▽ MC-E=3

220-240V 18,5W CRI>90

3P16P. 5■◪.□ IGBT Triac **€ 390,00** ▼

■ Led color	Nominal lm	◪ Beam spread
2 = 2700 °K	2683	L = 60°
3 = 3000 °K	2842	S = 24°
4 = 4000 °K	2963	T = 12°

□ Frame	
02 ●	Black
06 ○	White

Pop P16 Pull 21,0 h. for 230 voltage 3~ circuit Eutrac

IP20 ⓒ Ⓣ CE ▽

220-240V G53 1x50W

3P16P. 530.□ **€ 302,00** ▼

IP20 © CE ▽ MC-E=3

220-240V 23W CRI>90

3P16P. 6■◪.□ on/off **€ 415,00** ▼

■ Led color	Nominal lm	◪ Beam spread
2 = 2700 °K	2228	L = 60°
3 = 3000 °K	2357	S = 24°
4 = 4000 °K	2455	T = 12°

□ Frame	
02 ●	Black
06 ○	White



Lighting track 230V 3-CCT and accessories



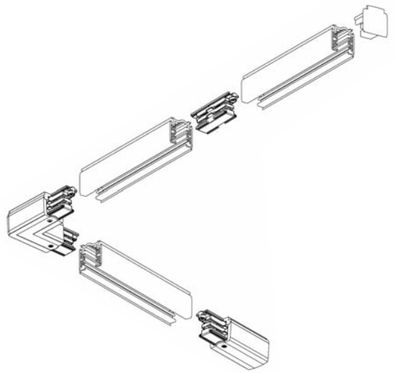

Supply connector earth conductor on right

1R-555112011 *White* € 31,00
1R-555112012 *Black* € 31,00

Supply connector earth conductor on left

1R-555112021 *White* € 31,00
1R-555112022 *Black* € 31,00

Lighting track 3-CCT aluminium length 1000 mm

1R-25101 *White* € 74,00
1R-25102 *Black* € 74,00

Lighting track 3-CCT aluminium llength 2000 mm

1R-25201 *White* € 125,00
1R-25202 *Black* € 125,00

Lighting track 3-CCT aluminium length 3000 mm

1R-25301 *White* € 185,00
1R-25302 *Black* € 185,00

Concealed coupling with wiring

1R-555112061 *White* € 19,00
1R-555112062 *Black* € 19,00

L-shaped coupling ground external

1R-555112091 *White* € 64,00
1R-555112092 *Black* € 64,00

L-shaped coupling ground internal

1R-555112101 *White* € 64,00
1R-555112102 *Black* € 64,00



Flexible coupling

1R-555112111 *White* € 95,00
1R-555112112 *Black* € 95,00



End cap

1R-555012171 *White* € 3,50
1R-555012172 *Black* € 3,50

Low-voltage Led track 48V and accessories





Supply connector earth conductor on right

1R-556242011 *White* € 56,00
1R-556242012 *Black* € 56,00



Supply connector earth conductor on left

1R-556242021 *White* € 56,00
1R-556242022 *Black* € 56,00



Lighting track aluminium length 2000 mm

1R-556241021 *White* € 134,00
1R-556241022 *Black* € 134,00



Lighting track aluminium length 3000 mm

1R-556241031 *White* € 190,00
1R-556241032 *Black* € 190,00

Straight coupler

1R-556242061 *White* € 19,00
1R-556242062 *Black* € 19,00



End cap

1R-556042171 *White* € 4,50
1R-556042172 *Black* € 4,50

Pop P30 Sun Static ROS



IP20 ©

220-240V	18,1W	CRI>90
3P30S . 6 ■ L. □	IGBT Triac	€ 332,00
3P30SA6 ■ L. □	DALI	€ 365,00
3P30SG6 ■ L. □	Push - 1...10V	€ 365,00

■ Led color	Nominal lm	Beam spread
2 = 2700 °K	2494	60°
3 = 3000 °K	2611	
4 = 4000 °K	2697	

□	Frame
02	Black
06	White

Pop P30 Sun Pull ROS



IP20 ©

220-240V	12,3W	CRI>90
3P30P . 5 ■ ◪ . □	IGBT Triac	€ 461,00
3P30PA5 ■ ◪ . □	DALI	€ 500,00
3P30PG5 ■ ◪ . □	Push - 1...10V	€ 500,00

■ Led color	Nominal lm	◪ Beam spread
2 = 2700 °K	1792	L = 80°
3 = 3000 °K	1876	M = 32°
4 = 4000 °K	1938	S = 24°

□	Frame
02	Black
06	White

Pop Host *Ø 32,0 mono-color* New



IP20 Ⓛ CE ▽

220-240V | e27 7W | CRI>80

3H32C.12L.□ | dimm. IGBT - Triac | € **360,00**

Led color 2700 °K | *Nominal lm* 806 | *Beam spread* 180°

□	*Frame*	*Bulb*	*CUP canopy*	*cable*
06	White	Mirror Chrome	White	White



IP20 Ⓛ A+B=390cm CE ▽

220-240V | e27 7W | CRI>80

3H32D.12L.□ | dimm. IGBT - Triac | € **385,00**

Led color 2700 °K | *Nominal lm* 806 | *Beam spread* 180°



Kit Cable for Host composition: H32C

1KIT.300.06 White € **36,00**



IP20 Ⓛ CE ▽

220-240V	e27 7W	CRI>80
3H80C.12L.☐	dimm. IGBT - Triac	€ **570,00**

Led color	*Nominal lm*	*Beam spread*
2700 °K	806	180°



IP20 Ⓛ A+B=390cm CE ▽

220-240V	e27 7W	CRI>80
3H80D.12L.☐	dimm. IGBT - Triac	€ **610,00**

Led color	*Nominal lm*	*Beam spread*
2700 °K	806	180°

☐	*Frame*	*Bulb*	*CUP canopy*	*cable*
06	White	Mirror Chrome	White	White



Kit Cable for Host composition: H80C

1KIT.300.06	White	€	**36,00**

Pop Host *Ø 80,0 mono-color* *New*

Pop Host *Ø 32,0 bi-color*



IP20 Ⓛ CE ▽

220-240V	e27 7W	CRI>80
3H32C.12L.□	IGBT - Triac	€ **500,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	806	180°



IP20 Ⓛ A+B=390cm CE ▽

220-240V	e27 7W	CRI>80
3H32D.12L.□	IGBT - Triac	€ **590,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	806	180°

□	*Up*	*Down*		*Canopy*	*cable*	*Bulb*
KS			Black/Brass	Black	Brass	Mirror Brass
WS			White/Brass	White	Brass	Mirror Brass
BS			Blue/Brass	Blue	Brass	Mirror Brass
GS			Green/Brass	Green	Brass	Mirror Brass
PS			Rose/Brass	Rose	Brass	Mirror Brass
RS			Red/Brass	Red	Brass	Mirror Brass

Time delivery: 25 Working Days



Kit Cable for Host composition: H32C

1KIT.300.S	Brass	€ **65,00**



IP20 Ⓛ		CE ▽
220-240V	e27 7W	CRI>80
3H80C.12L.☐	IGBT - Triac	**€ 1.230,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	806	180°



IP20 Ⓛ	A+B=390cm	CE ▽
220-240V	e27 7W	CRI>80
3H80D.12L.☐	IGBT - Triac	**€ 1.265,00**
Led color	*Nominal lm*	*Beam spread*
2700 °K	806	180°

☐	*Up*	*Down*	*Diffuser color*	*CUP*	*cable*	*Bulb*
KS			Black/Brass	Black	Brass	Mirror Brass
WS			White/Brass	White	Brass	Mirror Brass
BS			Blue/Brass	Blue	Brass	Mirror Brass
GS			Green/Brass	Green	Brass	Mirror Brass
PS			Rose/Brass	Rose	Brass	Mirror Brass
RS			Red/Brass	Red	Brass	Mirror Brass

Time delivery: 25 Working Days



Kit Cable for Host composition: H80C

1KIT.300.S	Brass	€	**65,00**

Pop Host *Ø 80,0 bi-color*

Pop Host - W - wall/ceiling bi-color



IP20 Ⓛ CE ▽

220-240V	e27 7W CRI>80	IGBT - Triac
3H32W.12L.☐	Ø 32cm	€ 355,00
3H80W.12L.☐	Ø 80cm	€ 1.050,00

Led color	*Nominal lm*	*Beam spread*
2700°K	806	180°

☐	*Up*	*Down*	*Diffuser color*	*Bulb*
KS			Black/Brass	Mirror Brass
WS			White/Brass	Mirror Brass
BS			Blue/Brass	Mirror Brass
GS			Green/Brass	Mirror Brass
PS			Rose/Brass	Mirror Brass
RS			Red/Brass	Mirror Brass

Time delivery: 25 Working Days

Pop Host *L/M - T/N bi-color*



IP20 Ⓛ A= max. 140cm CE ▽

220-240V | e27 7W | CRI>80

3H32N.12L.☐ | dim. IGBT - Triac | € **650,00**

Led color 2700 °K | *Nominal lm* 806 | *Beam spread* 180°

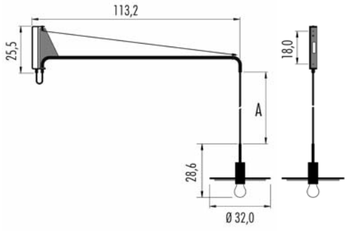

IP20 Ⓛ A= max. 130cm CE ▽

220-240V | e27 7W | CRI>80

3H32M.12L.☐ | dim. IGBT - Triac | € **900,00**

Led color 2700 °K | *Nominal lm* 806 | *Beam spread* 180°



IP20 Ⓛ A+B=360cm CE ▽

220-240V | e27 7W | CRI>80

3H32T.12L.☐ | dim. IGBT - Triac | € **620,00**

Led color 2700 °K | *Nominal lm* 806 | *Beam spread* 180°



IP20 Ⓛ A+B=300cm CE ▽

220-240V | e27 7W | CRI>80

3H32L.12L.☐ | dim. IGBT - Triac | € **850,00**

Led color 2700 °K | *Nominal lm* 806 | *Beam spread* 180°

☐	*Up*	*Down*	*Diffuser color*	*Bulb*
KS			Black/Brass	Mirror Brass
WS			White/Brass	Mirror Brass
BS			Blue/Brass	Mirror Brass
GS			Green/Brass	Mirror Brass
PS			Rose/Brass	Mirror Brass
RS			Red/Brass	Mirror Brass

Time delivery: 25 Working Days

Pop P40 Chandelier

Free of Tax

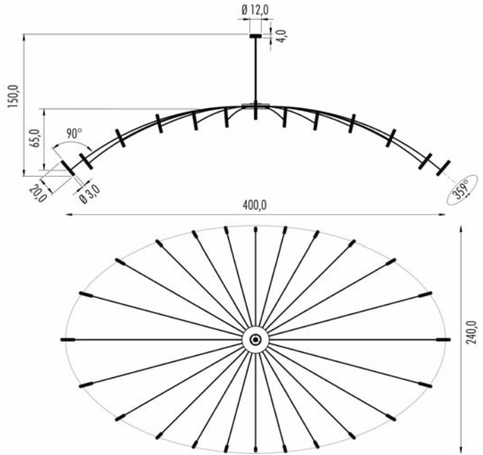

IP20 Ⓣ MC-E=3 CE ▽

220-240V	24x13,4W	CRI>90
3P40A.2 M.02		€ 7.800,00
3P40A.2 M.06		€ 7.800,00
3P40A.2 M.B		€ 8.800,00
3P40A.2 M.C		€ 9.000,00
3P40A.2 M.G		€ 8.800,00
3P40A.2 M.P		€ 8.800,00
3P40A.2 M.R		€ 8.800,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	24 x 1650	M = 35°
3 = 3000 °K	24 x 1727	

3DRV.024.DIM DALI - Push - 1...10V € 91,00
Remote installation: need 2 units



IP20 Ⓣ MC-E=3 CE ▽

220-240V	24x13,4W	CRI>90
3P40B.2 M.02		€ 6.600,00
3P40B.2 M.06		€ 6.600,00
3P40B.2 M.B		€ 7.600,00
3P40B.2 M.C		€ 7.800,00
3P40B.2 M.G		€ 7.600,00
3P40B.2 M.P		€ 7.600,00
3P40B.2 M.R		€ 7.600,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	24 x 1650	M = 35°
3 = 3000 °K	24 x 1727	

3DRV.024.DIM DALI - Push - 1...10V € 91,00
Remote installation: need 2 units



IP20 Ⓣ MC-E=3 CE ▽

220-240V	24x13,4W	CRI>90
3P40R.2 M.02		€ 6.600,00
3P40R.2 M.06		€ 6.600,00
3P40R.2 M.B		€ 7.600,00
3P40R.2 M.C		€ 7.800,00
3P40R.2 M.G		€ 7.600,00
3P40R.2 M.P		€ 7.600,00
3P40R.2 M.R		€ 7.600,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	24 x 1650	M = 35°
3 = 3000 °K	24 x 1727	

3DRV.024.DIM DALI - Push - 1...10V € 91,00
Remote installation: need 2 units

☐	*Frame*
02	Black
06	White
B	Blue
C	Copper
G	Green
P	Rose
R	Red

Time delivery: 30 Working days

Ⓣ
Two given electronic gears (remote installation) for double switching on (alternating mode).

Die zwei gegebenen Netzgeräte (separat einzubauen) einstellen die Doppelzündung der Strahler (abwechselnd).

Les deux transformateurs fournis (à positionner en retrait) commandent un double allumage des sources lumineuses (12 d'une part, 12 d'autre part).

Los dos transformadores suministrados (a instalar de forma remota) permiten el doble encendido de la lámpara (cuyos brazos lo hacen de manera alterna).

P50 Pinocchio



IP20 ©	MC-E-3	CE ▽	
100-240V	6W CRI>90	dimmable	
4P50.2 ■ M.02	*With honeycomb*	€	410,00
4P50.2 ■ M.06	*With honeycomb*	€	410,00
4P50.2 ■ M.B	*With honeycomb*	€	480,00
4P50.2 ■ M.C	*With honeycomb*	€	480,00
4P50.2 ■ M.G	*With honeycomb*	€	480,00
4P50.2 ■ M.P	*With honeycomb*	€	480,00
4P50.2 ■ M.R	*With honeycomb*	€	480,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	824	35°
3 = 3000 °K	861	
4 = 4000 °K	888	

□	*Frame*
02	Black
06	White
B	Blue
C	Copper
G	Green
P	Rose
R	Red

Time delivery: 25 Working days

P55 Pinocchio



IP20 ©	MC-E-3	CE ▽	
100-240V	6W CRI>90	dimmable	
4P55.2 ■ M.02	*With honeycomb*	€	500,00
4P55.2 ■ M.06	*With honeycomb*	€	500,00
4P55.2 ■ M.B	*With honeycomb*	€	560,00
4P55.2 ■ M.C	*With honeycomb*	€	560,00
4P55.2 ■ M.G	*With honeycomb*	€	560,00
4P55.2 ■ M.P	*With honeycomb*	€	560,00
4P55.2 ■ M.R	*With honeycomb*	€	560,00

■ *Led color*	*Nominal lm*	*Beam spread*
2 = 2700 °K	824	35°
3 = 3000 °K	861	
4 = 4000 °K	888	

□	*Frame*
02	Black
06	White
B	Blue
C	Copper
G	Green
P	Rose
R	Red

Time delivery: 25 Working days

Pop P120 - P200

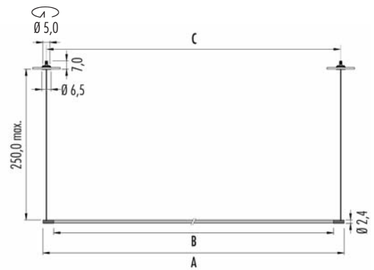

Pop P120 ARC *recessed canopy for plasterboard ceiling*

IP20 Ⓣ CE

220-240V	26W	CRI>85
3PA1.43L.□		**€ 707,00**

A = 124cm B = 108,4cm C = 119cm

Led color	*Nominal lm*	*Beam spread*
3000°K	2350	106°

Pop P200 ARC *recessed canopy for plasterboard ceiling*

IP20 Ⓣ CE

220-240V	43W	CRI>85
3PA2.43L.□		**€ 1.050,00**

A = 196cm B = 180,4cm C = 191cm

Led color	*Nominal lm*	*Beam spread*
3000°K	3915	106°

Electronic gear has to be placed in a remote position

3KIT.024.DIM Dimmable option: DALI - Push - 1...10V **€ 91,00** Remote installation - need 1 unit to order

□		*Frame*	*ARC canopy*	*CUP canopy*	*Cable*
02	●	Black	White	Black	Black
06	○	White	White	White	White

Time delivery: 25 Working Days



Pop P120 CUP *external canopy*

IP20 Ⓣ CE

220-240V	26W	CRI>85
3PC1.43L.□	on/off	**€ 733,00**

Led color	*Nominal lm*	*Beam spread*
3000°K	2350	106°

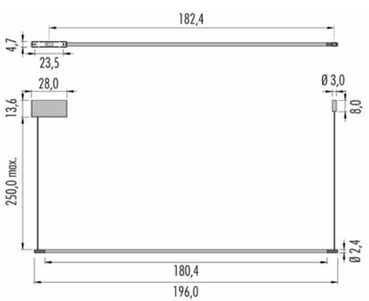

Pop P200 CUP *external canopy*

IP20 Ⓣ CE

220-240V	43W	CRI>85
3PC2.43L.□	on/off	**€ 1.016,00**

Led color	*Nominal lm*	*Beam spread*
3000°K	3915	106°

Pop P122 - P202 Brooklyn

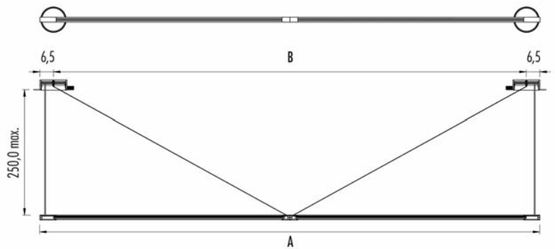

Pop P122 ARC *recessed canopy for plasterboard ceiling*

IP20 CE

220-240V | 2x26W | CRI>85

3P122.43L.□ **€ 1.391,00**

A = 240cm B = 227cm

Led color	*Nominal lm*	*Beam spread*
3000 °K	2x2350	106°

3KIT.024.DIM Dimmable option: DALI - Push - 1...10V **€ 91,00**
Remote installation - need 2 units to order

Housing for plasterboard Ø 14,0cm

1Z00.120.01 ● x2 **€ 46,00** *each*

Housing for brickwork

1M00.120.01 ● x2 **€ 111,00** *each*

Pop P202 ARC *recessed canopy for plasterboard ceiling*

IP20 CE

220-240V | 2x43W | CRI>85

3P202.43L.□ **€ 2.023,00**

A = 384cm B = 371cm

Led color	*Nominal lm*	*Beam spread*
3000 °K	2x3915	106°

3KIT.024.DIM Dimmable option: DALI - Push - 1...10V **€ 91,00**
Remote installation - need 2 units to order

□		*Frame*	*ARC canopy*	*CUP canopy*	*cable*
02	●	Black	White	Black	Black
06	○	White	White	White	White

Time delivery: 25 Working Days

Pop P123 - P203

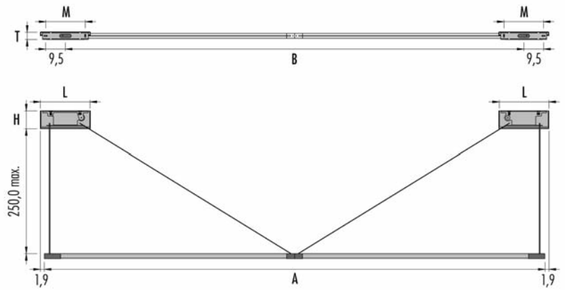

Pop P123 CUP *external canopy*

IP20 Ⓣ CE

220-240V	2x26W	CRI>85
3P123.43L.□	on/off	**€ 1.600,00**

A = 240cm B = 219,8cm
L = 24,0cm H = 8,6cm T = 4,1cm M = 19,0cm

Led color	*Nominal lm*	*Beam spread*
3000°K	2x2350	106°

Pop P203 CUP *external canopy*

IP20 Ⓣ CE

220-240V	2x43W	CRI>85
3P203.43L.□	on/off	**€ 2.200,00**

A = 384cm B = 363,8cm
L = 28,0cm H = 13,6cm T = 4,7cm M = 23,5cm

Led color	*Nominal lm*	*Beam spread*
3000°K	2x3915	106°

□		*Frame*	*ARC canopy*	*CUP canopy*	*cable*
02	●	Black	White	Black	Black
06	○	White	White	White	White

Time delivery: 25 Working Days

Pop Up 1 wall



IP20 Ⓣ		CE ▽
220-240V	17W CRI>85	on/off
3PU1.43L.02		€ 480,00
3PU1.43L.06		€ 480,00
3PU1.43L.CB		€ 530,00
3PU1.43L.CR		€ 530,00
Led color	*Nominal lm*	*Beam spread*
3 = 3000°K	1794	L = 106°

Electronic gear has to be placed in a remote position

3KIT.024.DIM	Dimmable option: DALI - Push - 1...10V Remote installation	€	91,00

☐ *Frame*		*Plate*	
02	Black		Black
06	White		White
CB	Copper		Blue
CR	Copper		Red

Time delivery: 25 Working days

Pop Up 207

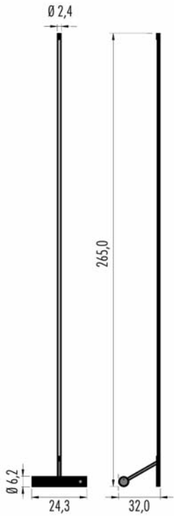

IP20 Ⓣ CE ▽

220-240V	58W	CRI>85
3P207.A3L.□	on/off	**€ 1.150,00**

wired for switch controlled socket CEI 3-23

Led color	*Nominal lm*	*Beam spread*
3000°K	5285	106°

IP20 Ⓣ CE ▽

220-240V	58W	CRI>85
3P207.B3L.□	on/off	**€ 1.150,00**

Switch on power supply cable

Led color	*Nominal lm*	*Beam spread*
3000°K	5285	106°

□	*Frame*
02	Black
06	White

Tim T01

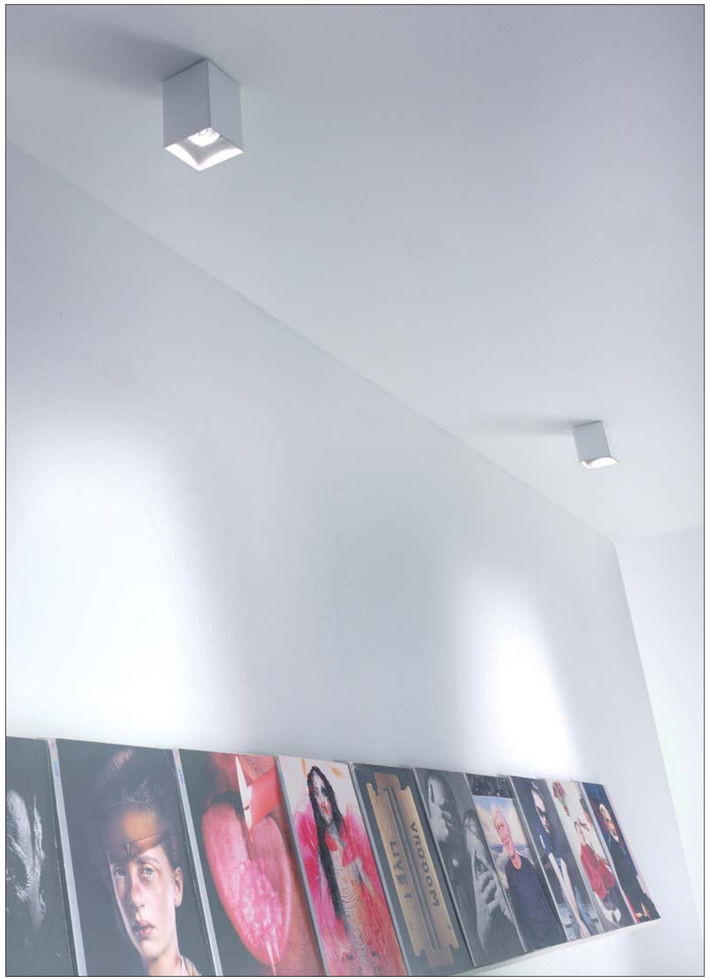



IP20		CE
220-240V	GU10 max50W	
3T01.210.02		€ 113,00
3T01.210.04		€ 123,00
3T01.210.06		€ 113,00



IP20	dimmable IGBT	CE
220-240V	led 13W	CRI>85
3T01.33S.02		€ 209,00
3T01.33S.06		€ 209,00

Led color	Nominal lm	Beam spread
3000 °K	1010	70°

	Frame
02	Black
04	Brushed steel
06	White

Tim T13

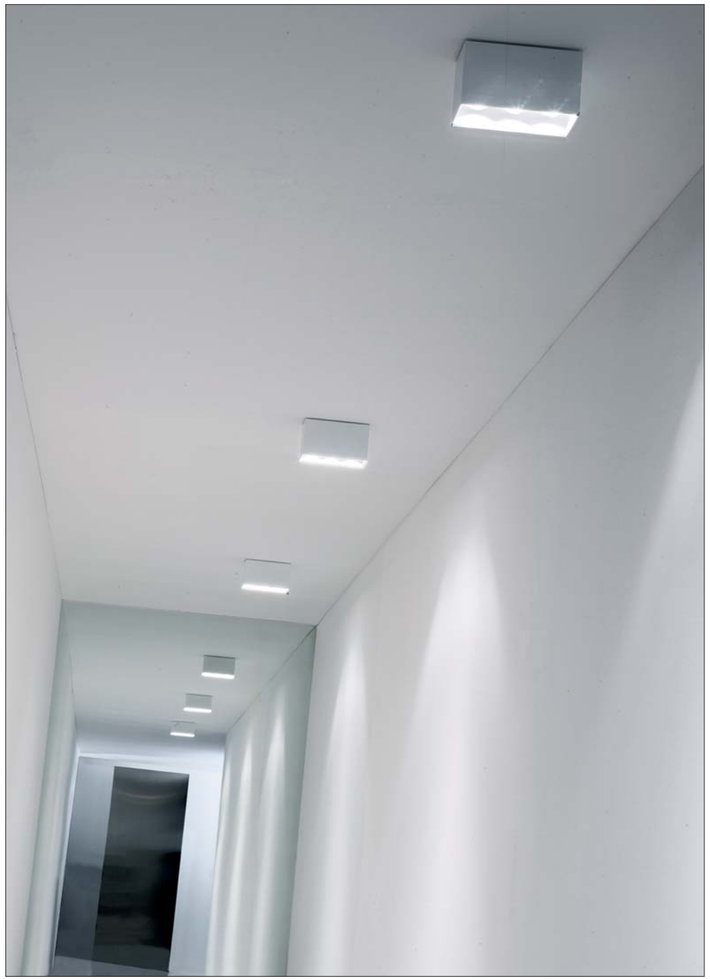



IP20		CE
220-240V	GU10 max 3x50W	
3T13.210.02		€ 171,00
3T13.210.04		€ 216,00
3T13.210.06		€ 171,00



IP20	dimmable IGBT	CE
220-240V	led 13W	CRI>85
3T13.33S.02		€ 257,00
3T13.33S.06		€ 257,00

Led color	Nominal lm	Beam spread
3000 °K	1010	70°

	Frame
02	Black
04	Brushed steel
06	White

Tim T02



IP20 © CE ▽ MC-E=3

220-240V	27W	CRI>90
3T02.6■■.□	on/off	€ 354,00
3T02A6■■.□	DALI	€ 370,00
3T02B6■■.□	Push	€ 370,00
3T02C6■■.□	1...10V	€ 370,00

■ Led color	Nominal lm	■ Beam spread
2 = 2700 °K	2683	L = 60°
3 = 3000 °K	2842	S = 24°
4 = 4000 °K	2963	T = 12°

IP20 Ⓣ ⓚ CE ▽

220-240V	G53 1x50W	
3T02.535.□		€ 230,00

□ *Frame*

02 ● Black
06 ○ White

Tim T03

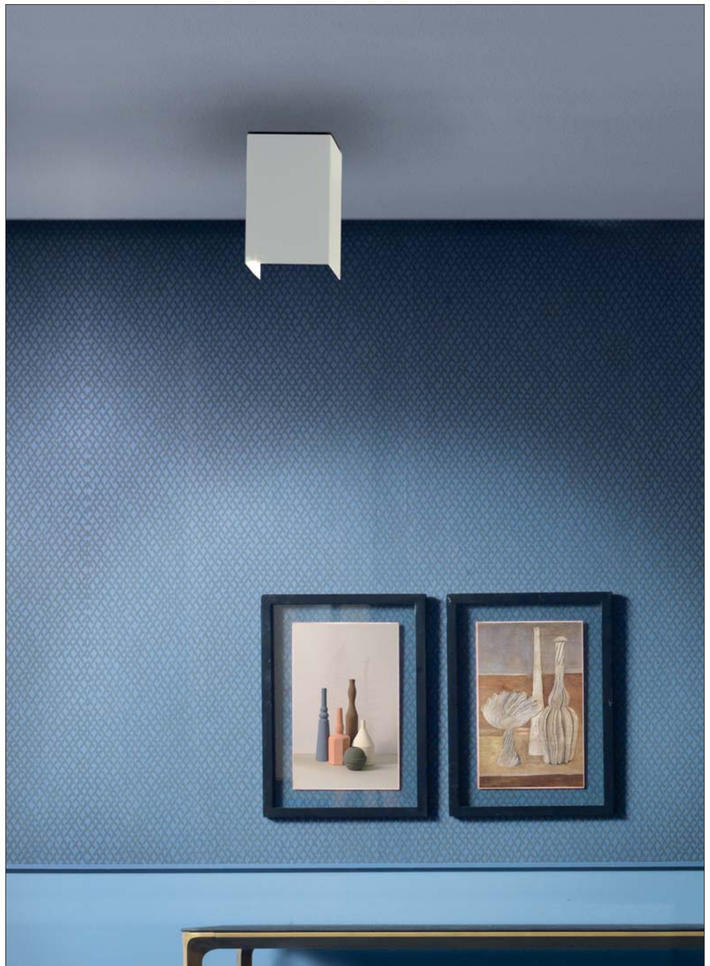



IP20 © CE ▽ MC-E=3

220-240V	27W	CRI>90
3T03.6■■.□	on/off	€ 354,00
3T03A6■■.□	DALI	€ 370,00
3T03B6■■.□	Push	€ 370,00
3T03C6■■.□	1...10V	€ 370,00

■ Led color	Nominal lm	■ Beam spread
2 = 2700 °K	2683	L = 60°
3 = 3000 °K	2842	S = 24°
4 = 4000 °K	2963	T = 12°

IP20 Ⓣ ⓚ CE ▽

220-240V	G53 1x50W	
3T03.535.□		€ 230,00

□ *Frame*

02 ● Black
06 ○ White

Tim T22



IP20 ©

220-240V	2x27W	CRI>90
3T22.6■◪◩.□	on/off	€ 610,00
3T22A6■◪◩.□	DALI	€ 680,00
3T22B6■◪◩.□	Push	€ 680,00
3T22C6■◪◩.□	1...10V	€ 680,00

■ Led color	Nominal lm	◪ Beam spread
2 = 2700 °K	2x2683	L = 60°
3 = 3000 °K	2x2842	S = 24°
4 = 4000 °K	2x2963	T = 12°

IP20 Ⓣ Ⓛ

220-240V	G53 2x50W	
3T22.535.□		€ 350,00 ▼

□ *Frame*

02	●	Black
06	○	White

Tim T32

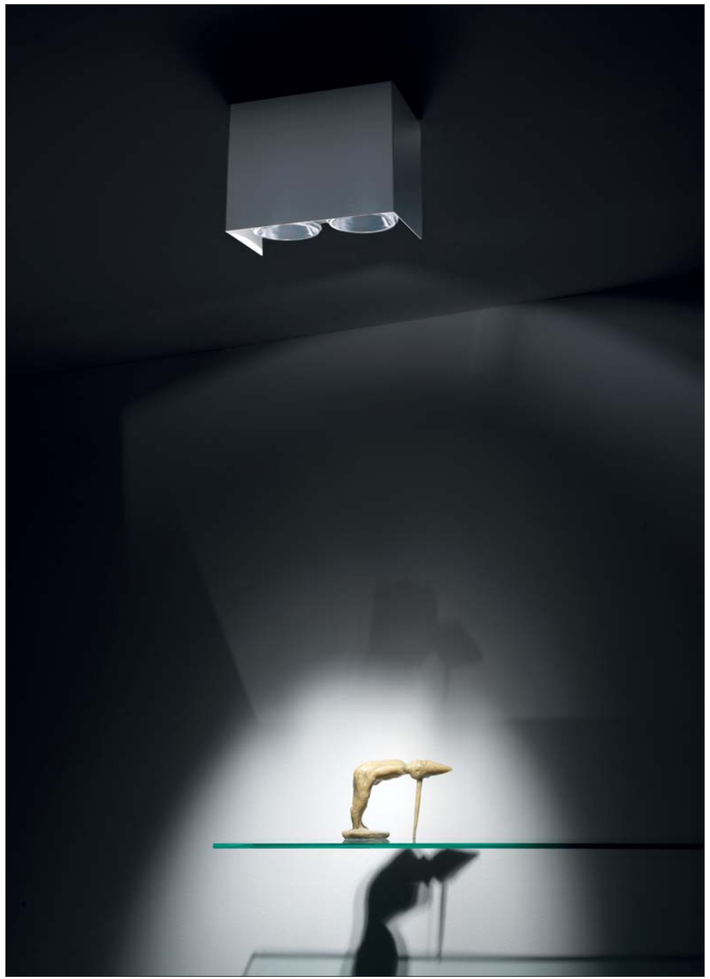



IP20 ©

220-240V	2x27W	CRI>90
3T32.6■◪◩.□	on/off	€ 610,00
3T32A6■◪◩.□	DALI	€ 680,00
3T32B6■◪◩.□	Push	€ 680,00
3T32C6■◪◩.□	1...10V	€ 680,00

■ Led color	Nominal lm	◪ Beam spread
2 = 2700 °K	2x2683	L = 60°
3 = 3000 °K	2x2842	S = 24°
4 = 4000 °K	2x2963	T = 12°

IP20 Ⓣ Ⓛ

220-240V	G53 2x50W	
3T32.535.□		€ 350,00 ▼

□ *Frame*

02	●	Black
06	○	White

Tim T25 -T60 - T120 ROS



Tim T25

IP20 L = 25,1cm CE

220-240V	17W	CRI>85
3T25.63L.☐	on/off	€ 279,00

Led color	Nominal lm	Beam spread
3000°K	2030	104°

Tim T60

IP20 L = 60,1cm CE

220-240V	34W	CRI>85
3T60 . 63L.☐	on/off	€ 364,00
3T60A63L.☐	DALI	€ 430,00
3T60G63L.☐	Push - 1...10V	€ 430,00

Led color	Nominal lm	Beam spread
3000°K	4120	104°

Tim T120

IP20 L = 120,1cm CE

220-240V	68W	CRI>85
3T120 . 63L.☐	on/off	€ 568,00
3T120A63L.☐	DALI	€ 620,00
3T120G63L.☐	Push - 1...10V	€ 620,00

Led color	Nominal lm	Beam spread
3000°K	8240	104°

☐ *Frame*

02 ● Black
06 ○ White

Tim T124 - T196

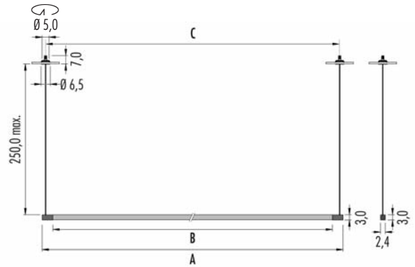

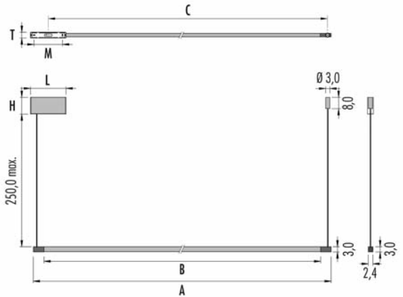

Tim T124 ARC *recessed canopy for plasterboard ceiling*

IP20 Ⓣ CE ▽ ◈

220-240V 2x26W CRI>85

3TA1.43L.□ **€ 835,00**

double switches up and down

A = 124cm B = 108,4cm C = 119cm

Led color	*Nominal lm*	*Beam spread*
3000 °K	2x2350	106°

Tim T124 CUP *external canopy*

IP20 Ⓣ CE ▽ ▣

220-240V 2x26W CRI>85

3TC1.43L.□ **€ 835,00**

singular switch up and down - dimmable on request

A = 124cm B = 108,4cm C = 110,4cm

L = 24,0cm H = 8,6cm T = 4,1cm M = 19,0cm

Led color	*Nominal lm*	*Beam spread*
3000 °K	2x2350	106°

Tim T196 ARC *recessed canopy for plasterboard ceiling*

IP20 Ⓣ CE ▽ ◈

220-240V 2x43W CRI>85

3TA2.43L.□ **€ 1.177,00**

double switches up and down

A = 196cm B = 180,4cm C = 191cm

Led color	*Nominal lm*	*Beam spread*
3000 °K	2x3915	106°

Tim T196 CUP *external canopy*

IP20 Ⓣ CE ▽ ▣

220-240V 2x43W CRI>85

3TC2.43L.□ **€ 1.177,00**

singular switch up and down

A = 196cm B = 180,4cm C = 182,4cm

L = 28,0cm H = 13,6cm T = 4,7cm M = 23,5cm

Led color	*Nominal lm*	*Beam spread*
3000 °K	2x3915	106°

3KIT.024.DIM

Dimmable option:
DALI - Push - 1...10V **€ 91,00**
Remote installation - need 2 unit to order

□		*Frame*	*ARC canopy*	*CUP canopy*	*cable*
02	●	Black	White	Black	Black
06	○	White	White	White	White

Time delivery: 25 Working Days

Wally 01 *Dynamic Ø 12,5*

	Frame
02	Black
06	White



IP20 | MC-E=3 | CE

350 - 500 m/A | CRI>90

3W01D.5■◩.□ € **270,00** ▼

© (m-M)	LED 12,5W	350m/A
3KIT.350.1L (1-1)	on/off	€ **21,00**
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€ **105,00**
3KIT.352.15 (1-1)	DALI	€ **59,00**
3KIT.353.15 (1-1)	Push - 1...10V	€ **59,00**
3KIT.354.18 (1-1)	IGBT - TRIAC	€ **32,00**

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700 °K	1792	M = 50°
3 = 3000 °K	1876	S = 24°
4 = 4000 °K	1938	

© (m-M)	LED 18,4W	500m/A
3KIT.500.1L (1-1)	on/off	€ **21,00**
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€ **105,00**
3KIT.502.20 (1-1)	DALI	€ **59,00**
3KIT.503.20 (1-1)	Push - 1...10V	€ **59,00**
3KIT.504.20 (1-1)	IGBT - TRIAC	€ **32,00**

■ *Led color*	*Nominal lm*	◩ *Beam spread*
2 = 2700 °K	2494	M = 50°
3 = 3000 °K	2611	S = 24°
4 = 4000 °K	2697	

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€ **95,00**
3KIT.900.03 (1-1)	3:00 hours/ore	€ **137,00**

Housing for plasterboard ◡ Ø 14,0cm

●	**1Z00.125.01**	Single	€ **40,00**
●●	**1Z00.125.2L**	Double	€ **75,00**
●●●	**1Z00.125.3L**	Triple 205	€ **106,00**

Housing for brickwork

●	**1M00.125.01**	€ **139,00**

(m-M) = min. Led unit - Max Led unit.
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Wally Ring *Dynamic Ø 13,1*



IP20 | MC-E=3 | CE

350 - 500 m/A | CRI>90

3WR1D.5■◪.□ € **288,00**

© (m-M)	LED 12,5W	350m/A	
3KIT.350.1L (1-1)	on/off	€	**21,00**
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€	**105,00**
3KIT.352.15 (1-1)	DALI	€	**59,00**
3KIT.353.15 (1-1)	Push - 1...10V	€	**59,00**
3KIT.354.18 (1-1)	IGBT - TRIAC	€	**32,00**

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	1792	M = 50°
3 = 3000 °K	1876	S = 24°
4 = 4000 °K	1938	

© (m-M)	LED 18,4W	500m/A	
3KIT.500.1L (1-1)	on/off	€	**21,00**
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€	**105,00**
3KIT.502.20 (1-1)	DALI	€	**59,00**
3KIT.503.20 (1-1)	Push - 1...10V	€	**59,00**
3KIT.504.20 (1-1)	IGBT - TRIAC	€	**32,00**

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	2494	M = 50°
3 = 3000 °K	2611	S = 24°
4 = 4000 °K	2697	

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	**95,00**
3KIT.900.03 (1-1)	3:00 hours/ore	€	**137,00**

□ *Frame*

02 ● Black
06 ○ White

*(**m-M**) = min. Led unit - Max Led unit.*
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Wally Ring *Pull Ø 12,5 cm*



IP20 | MC-E=3 | CE

350 - 500 m/A | CRI>90

3WR1P.5■◪.□ € **330,00**

© (m-M)	LED 12,5W	350m/A	
3KIT.350.1L (1-1)	on/off	€	**21,00**
3KIT.351.40 (1-3)	DALI - Push - 1...10V	€	**105,00**
3KIT.352.15 (1-1)	DALI	€	**59,00**
3KIT.353.15 (1-1)	Push - 1...10V	€	**59,00**
3KIT.354.18 (1-1)	IGBT - TRIAC	€	**32,00**

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	1792	M = 50°
3 = 3000 °K	1876	S = 24°
4 = 4000 °K	1938	

© (m-M)	LED 18,4W	500m/A	
3KIT.500.1L (1-1)	on/off	€	**21,00**
3KIT.501.50 (1-3)	DALI - Push - 1...10V	€	**105,00**
3KIT.502.20 (1-1)	DALI	€	**59,00**
3KIT.503.20 (1-1)	Push - 1...10V	€	**59,00**
3KIT.504.20 (1-1)	IGBT - TRIAC	€	**32,00**

■ *Led color*	*Nominal lm*	◪ *Beam spread*
2 = 2700 °K	2494	M = 50°
3 = 3000 °K	2611	S = 24°
4 = 4000 °K	2697	

Emergency unit: (inverter + battery. Driver not included)

3KIT.900.01 (1-1)	1:00 hour/ora	€	**95,00**
3KIT.900.03 (1-1)	3:00 hours/ore	€	**137,00**

□ *Frame*

02 ● Black
06 ○ White

*(**m-M**) = min. Led unit - Max Led unit.*
Led and Emergency unit, warranty only when used together with driver bought from Oty srl.

Wally 07 *Pull Ø 12,5*

	Frame
02	Black
06	White



IP20 © CE MC-E=3

220-240V	18W	CRI>90
3W07P . 5 .	IGBT Triac	€ 430,00
3W07PA5 .	DALI	€ 455,00
3W07PG5 .	Push - 1...10V	€ 455,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	1792	M = 50°
3 = 3000 °K	1876	S = 24°
4 = 4000 °K	1938	



IP20 © CE MC-E=3

220-240V	26W	CRI>90
3W07P . 6 .	on/off	€ 430,00
3W07PA6 .	DALI	€ 455,00
3W07PG6 .	Push - 1...10V	€ 455,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	3374	M = 50°
3 = 3000 °K	3533	S = 24°
4 = 4000 °K	3649	

Wally 16 *Pull Ø 12,5* *for 230 voltage 3 circuit Eutrac*

	Frame
02	Black
06	White



IP20 © CE MC-E=3

220-240V	18W	CRI>90
3W16P. 5 .	IGBT Triac	€ 319,00 ▼

Led color	Nominal lm	Beam spread
2 = 2700 °K	1792	M = 50°
3 = 3000 °K	1876	S = 24°
4 = 4000 °K	1938	



IP20 © CE MC-E=3

220-240V	26W	CRI>90
3W16P. 6 .	IGBT Triac	€ 430,00

Led color	Nominal lm	Beam spread
2 = 2700 °K	3374	M = 50°
3 = 3000 °K	3533	S = 24°
4 = 4000 °K	3649	

X-Running

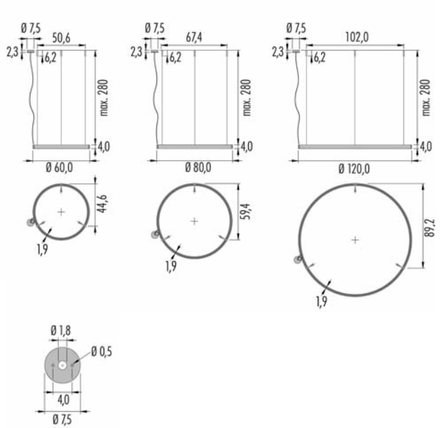

R06 Ø 60,0 — *Electronic Gear in remote position*

IP40 Ⓣ — CE ▽ ◈

24V	88W	CRI>90
3R06.4■L.□	on/off	€ 1.100,00

■ *Led color*	*Nominal lm*	*Beam spread*
2700 °K	6552	44°
3000 °K	7280	

3KIT.E24.DIM — *Dimmable option:* DALI - Push - 1...10V — € 70,00

R08 Ø 80,0 — *Electronic Gear in remote position*

IP40 Ⓣ — CE ▽ ◈

24V	126W	CRI>90
3R08.4■L.□	on/off	€ 1.350,00

■ *Led color*	*Nominal lm*	*Beam spread*
2700 °K	9432	44°
3000 °K	10480	

3KIT.E24.DIM — *Dimmable option:* DALI - Push - 1...10V — € 70,00

R12 Ø 120,0 — *Electronic Gear in remote position*

IP40 Ⓣ — CE ▽ ◈

24V	184W	CRI>90
3R12.4■L.□	on/off	€ 1.700,00

■ *Led color*	*Nominal lm*	*Beam spread*
2700 °K	13752	44°
3000 °K	15280	

3KIT.E24.DIM — *Dimmable option:* DALI - Push - 1...10V — € 70,00

□ *Frame*

02 ● Black
06 ○ White

Available from 15/10/2019

X-Running

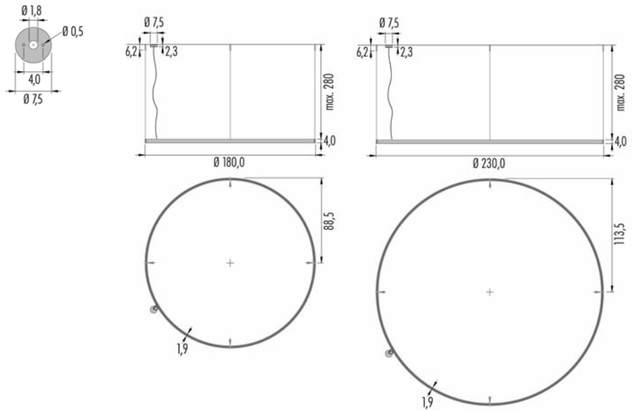

R18 Ø 180,0 *Electronic Gear in remote position*

IP40 Ⓣ CE

24V	270W	CRI>90
3R18.4■L.□	on/off - 1...10V	**€ 2.250,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2700 °K	20232	44°
3000 °K	22480	

Dimmable option:

3KIT.D24.DIM DALI - Push - 1...10V **€ 250,00**

R23 Ø 230,0 *Electronic Gear in remote position*

IP40 Ⓣ CE

24V	347W	CRI>90
3R23.4■L.□	on/off - 1...10V	**€ 3.100,00**

■ *Led color*	*Nominal lm*	*Beam spread*
2700 °K	26028	44°
3000 °K	28920	

DDimmable option:

3KIT.D24.DIM DALI - Push - 1...10V **€ 250,00**

□ *Frame*

02 ● Black
06 ○ White

Available from 15/10/2019

Zip 90 ROS



IP20 — CE

220V ÷ 240V	GU10 max 50W		
3ZIP90GU10 ☐	*P = 8,0cm*	€	52,00

IP20 — CE

12V	GU5.3 max 50W		
3ZIP90GU5.3 ☐	*P = 8,0cm*	€	49,00
3KIT.201.050	*max 50VA dimmable gear: IGBT*	€	32,00



Housing for Brickwork **ONLY for ZIP 90 - ZIP 45**

1ZIP - Z	one unit	€	17,50
1ZIP - Zx10	ten units	€	157,50

☐ *Frame*

3	●	Aluminium painted
6	○	White painted

Glass for **ZIP 90 - ZIP 60 - ZIP 45**

2ZIP - V	one unit	€	10,00
2ZIP - Vx10	ten units	€	90,00

Zip 60 ROS

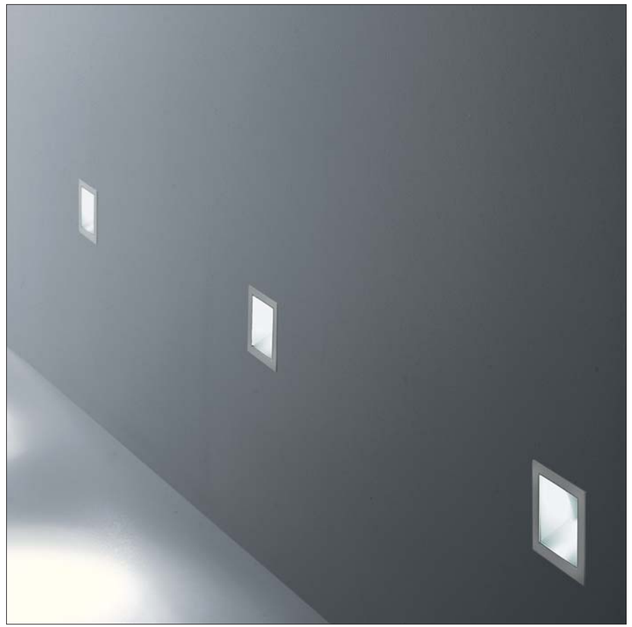



Zip 60 only for plasterboard

IP20 — CE

220V ÷ 240V	GU10 max 50W		
3ZIP60GU10 ☐	*P = 9,5cm*	€	56,00

IP20 — CE

12V	GU5.3 max 50W		
3ZIP60GU5.3 ☐	*P = 8,5cm*	€	54,00
3KIT.201.050	*max 50VA dimmable gear: IGBT*	€	32,00

Appendix

- Filo System: configurations and geometries
- Housings for plasterboard and brickwork
- Mounting instructions for housings

Filo System: configurations

Example 1



2 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

1 x Canopy: CUP
1 x Kit: KIT.WM5.02

Example 2



2 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

1 x Canopy: CUP
1 x Kit: KIT.WM5.02

Example 3



1 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

1 x Canopy: ARC or CUP
1 x Kit: KIT.WM5.02

Example 4



2 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

1 x Canopy: CUP
1 x Kit: KIT.WM5.02

Example 5



2 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

1 x Canopy: CUP
1 x Kit: KIT.WM8.02

Example 6



2 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

1 x Canopy: CUP
1 x Kit: KIT.WM8.02

Example 7



1 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

1 x Canopy: ARC or CUP
1 x Kit: KIT.WM5.02

Example 8



2 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

2 x Canopy: ARC or CUP
1 x Kit: KIT.WM5.02

Example 9



1 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBonn

1 x Canopy: CUP with Plug-in
1 x Kit: KIT.WM5.02

Example 10



1 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

1 x Canopy: CUP with Plug-in
1 x Kit: KIT.WM5.02

Example 11



1 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

1 x Canopy: CUP with Plug-in
1 x Kit: KIT.WM5.02

Example 12



2 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

2 x Canopy: CUP with Plug-in
1 x Kit: KIT.WM8.02

Filo System: wall geometries

1 x Diffuser:
Bijou | C'est moi | C'est toi | Chérie | Petit | Chapeau | BonBon

1 x Canopy:
ARC or CUP or CUP with Plug-in

1 x Kit:
KIT.WM5.02 or KIT.WM8.02

Z00.030.01/N00.030.01

Housing for plasterboard

Pop P00 Ø 3,0



1Z00.030.01
Ø 4,0 cm

Pop P00 NaNo Ø 3,0

1N00.030.01
Ø 4,0 cm

M00.030.01

Housing for brickwork

Pop P00 Ø 3,0



1M00.030.01

Z00.040.01

Housing for plasterboard

Pop P01 Ø 4,0



1Z00.040.01
Ø 5,1 cm

Z00.055.01

Housing for plasterboard

POP P01 Ø 5,5
POP P01 NaNo Ø 5,5
POP P01 Bulb Ø 6,0
POP P01 Bulb Ø 9,5
POP P02 Ø 5,5



1Z00.055.01
Ø 6,5 cm



M00.055.01

Housing for brickwork



1M00.055.01

Z00.060.01

Housing for plasterboard

Pop P03 Ø 6,0
Pop P03 NaNo Ø 6,0



1Z00.060.01
Ø 7,6 cm

Pop P03 Ø 8,0

Z00.080.01

Housing for plasterboard

Pop P03 Ø 8,0
Pop P03 NaNo Ø 8,0
Pop P04 Ø 8,0
Pop P12 Ø 3,0



1Z00.080.01
Ø 9,5 cm



M00.080.01

Housing for brickwork

Pop P03 Ø 8,0
Pop P03 NaNo Ø 8,0
Pop P12 Ø 3,0



1M00.080.01

Pop PX3 Ø 10,0

Z00.100.01

Housing for plasterboard

Pop PX3 Ø 10,0
Pop PX3 NaNo Ø 10,0
Pop PY3 Ø 10,0
Pop PY3 NaNo Ø 10,0
Pop PZ3 Ø 10,0



1Z00.100.01

Pop P12 Ø 7,0

Z00.120.01

Housing for plasterboard

Pop P04 Ø 12,0
Pop P12 Ø 7,0
Pop P12 Ø 12,5
Pop P122 Brooklin Arc
Pop P202 Brooklin Arc



1Z00.120.01
Ø 14,0 cm



M00.070.01

Housing for brickwork



1M00.120.01

Pop P01 Dynamic Ø 12,5

Z00.125.01

Housing for plasterboard

Pop P01 Static Ø 12,5
Pop P01 Dynamic Ø 12,5
Wally W01 Dynamic Ø 12,5



1Z00.125.01
Ø 14,0 cm



M00.125.01

Housing for brickwork



1M00.125.01

Pop P03 Ø 17,0

Z00.170.01

Housing for plasterboard

M00.170.01

Housing for brickwork

Pop P03 Ø 17,0
Pop P03 Static Ø 17,0
Pop P03 Wall Wash Ø 17,0
Pop P03 Look Ø 17,0



1Z00.170.01
Ø 19,0 cm



1M00.170.01



easy Pop X3 Ø 10,0

Easy POP

Housing for brickwork

Easy Pop P00 Ø 3,0
Easy Pop P00 NaNo Ø 3,0
Easy Pop P01 Ø 4,0
Easy Pop P01 Ø 5,5
Easy Pop P01 NaNo Ø 5,5
Easy Pop P01 Bulb
Easy Pop P02 Ø 5,5



1E00.030.01



1E00.040.01



1E00.055.01

Easy Pop P03 Ø 8,0
Easy Pop P03 NaNo Ø 8,0
Easy Pop P04 Ø 8,0
Easy Pop PX3 Ø 10,0
Easy Pop PX3 NaNo Ø 10,0
Easy Pop PY3 Ø 10,0
Easy Pop PY3 NaNo Ø 10,0
Easy Pop PZ3 NaNo Ø 10,0



1E00.080.01



1E00.100.01

W00.085.01

Housing for plasterboard

Pop P04A Magic
Pop P04B Magic



1W00.085.01

W00.125.01

Housing for plasterboard

Pop P04C Magic
Pop P12/L Ø 3,0



1W00.125.01

K00.170.01
Housing for plasterboard

Pop P03 Look



1K00.170.01
Ø 19,0 cm

Pop P05 Ø 6,7 For brickwork

M00.067.01
Housing for brickwork

Pop P05 Ø 6,7



1M00.067.01

M00.082.01
Housing for brickwork

Pop P05 Ø 8,2



1M00.082.01

Z00.070.01
Housing for plasterboard

Pop P10



1Z00.070.01

M00.070.01
Housing for brickwork



1M00.070.01

Z00.043.01
Housing for plasterboard

Pop P11



1Z00.043.0

Pop installation on plasterboad

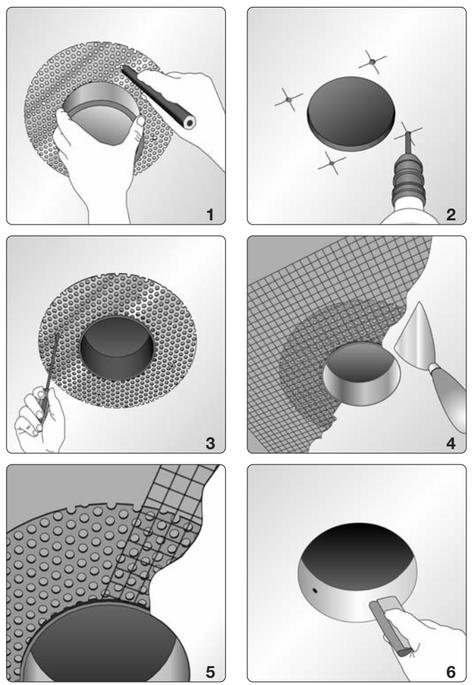

1) once pointed the position of the lamp
mark the fixing holes for the housing
2) make the hole for the housing and the holes for
the fixing rawlplugs
3) fix the screws of the housing to the ceiling plasterboard
4) apply the proper grasping net
5) plaster and trim the compensating 2 mm gap
6) keep clean the inside of the housing

Z00.030.01
Z00.040.01
Z00.055.XX
Z00.060.01
Z00.080.XX
Z00.120.XX
Z00.125.XX
Z00.170.XX
K00.170.01
Z00.070.01
Z00.043.01

Pop installation on brickwork

Form a recess in the ceiling for the brickwork housing.
Insert the power cables in to the brickwork housing and complete the ceiling with plaster finish.
Keep the inside brickwork housing clean. Install the item into the housing.

M00.030.01
M00.055.01
M00.080.01
M00.120.01
M00.125.01
M00.170.01
M00.070.01

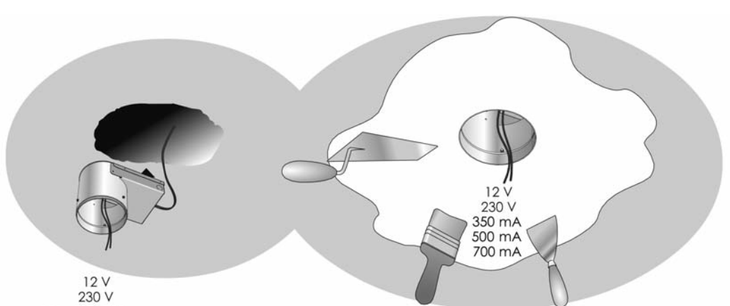

Pop 04 Magic 25/40/120 h.

Code:
W00.085.01 (P04A - P04B)
Housing for plasterboard



Code:
W00.125.01 (P04C)
Housing for plasterboard
Gehäuse für Gipskarton

















1) Once pointed the position of the lamp, make the hole for the housing.
2) Place the housing on the side of the plasterboard plate that will remain invisible after the work is done.
3 - 4) Put some metal profiles to fix and reinforce the area of the housing.
5) Fix with screws, the housing to the plasterboard and to the reinforcement profiles.
6 - 7) Complete the false ceiling, plaster and trim.
8) Keep clean the inside of the housing.

Pop 12 L 120 h.

Code: **W00.125.01 (P12L)**
Housing for plasterboard















1) Once pointed the position of the lamp, make the hole for the housing.
2) Place the housing on the side of the plasterboard plate that will remain invisible after the work is done.
3 - 4) Put some metal profiles to fix and reinforce the area of the housing.
5) Fix with screws, the housing to the plasterboard and to the reinforcement profiles.
6 - 7) Complete the false ceiling, plaster and trim.
8) Keep clean the inside of the housing.

Pop 10 installation on plasterboad

Code: **Z00.070.01**
Housing for plasterboard



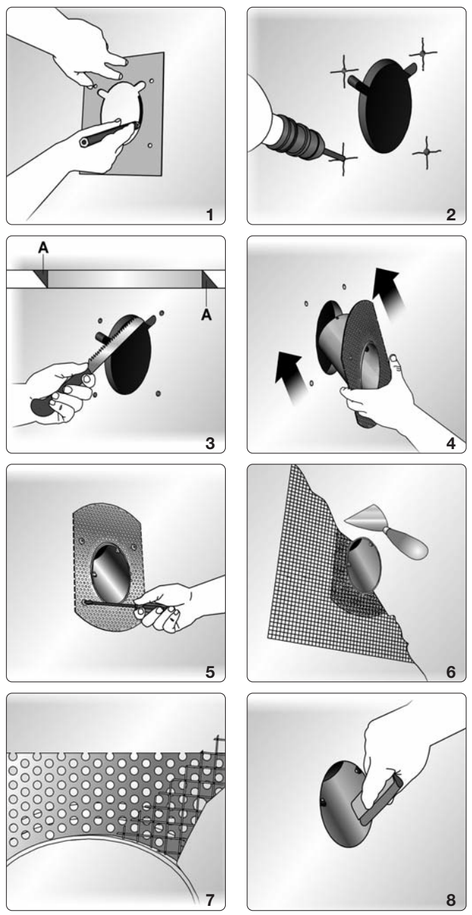

1) Once pointed the position of the lamp, mark with the given shape the entry hole and the fixing holes for the housing.
2) Make the hole for the housing and the holes for the fixing dowels.
3) Adjust the inside edge of the housing entry hole to allow the element installation at 45°.
4) Put the housing into the hole with a move at nearly 45° compared to the fixing surface.
5) Fix the housing to the ceiling or wall plasterboard with the screws.
6) Apply the proper grasping net.
7) Plaster and trim compensating the 1 mm gap.
8) Keep clean the inside of the housing.

Pop 10 installation on brickwork

Code: **M00.070.01**
Housing for brickwork



Form a recess in the ceiling for the brickwork housing.
Insert the power cables in to the brickwork housing and complete the ceiling with plaster finish.
Keep the inside brickwork housing clean.
Install the item into the housing.

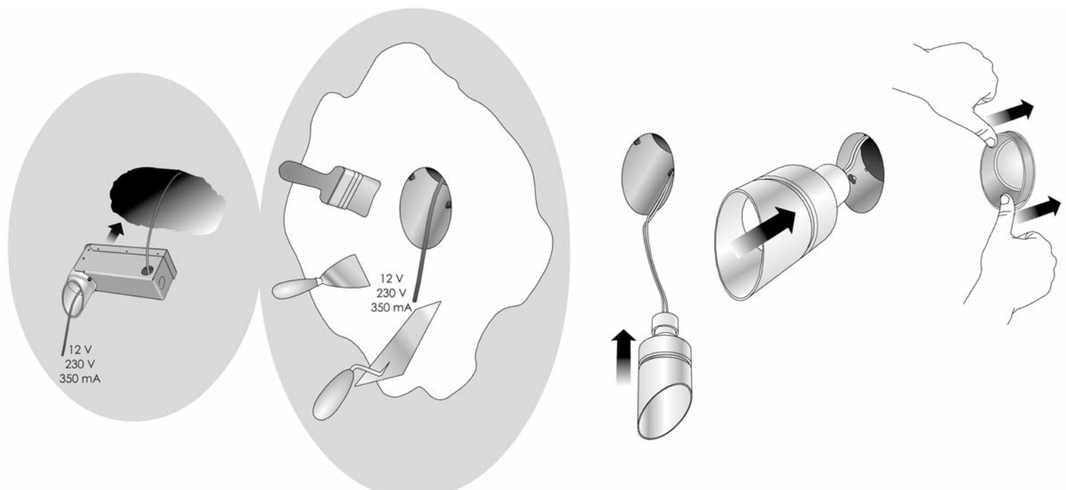

Pop 11 installation on plasterboad

Code:
Z00.043.01
Housing for plasterboard



















1) Once pointed the position of the lamp, mark with the given shape the entry hole and the fixing holes for the housing.
2) Make the hole for the housing and the holes for the fixing dowels.
3) Adjust the inside edge of the housing entry hole.
4) Put the housing into the hole.
5) Fix the housing to the ceiling or wall plasterboard with the screws.
6) Apply the proper grasping net.
7) Plaster and trim compensating the 1 mm gap.
8) Keep clean the inside of the housing.

Bic installation on plasterboad

Z07.070.01
Housing for plasterboard





BIC B07











Z12.120.01
Housing for plasterboard



BIC B12

Z0B.016.01
Housing for plasterboard



BIC B16











Z0B.025.01 - Z0B.050.01 - Z0B.060.01 - Z0B.120.01



BIC B25 L1= *25,8*
BIC B50 L1= *50,8*
BIC B60 L1= *60,8*
BIC B120 L1= *120,8*









Easy Pop installation on plasterboad: Pop P00/P01/P02



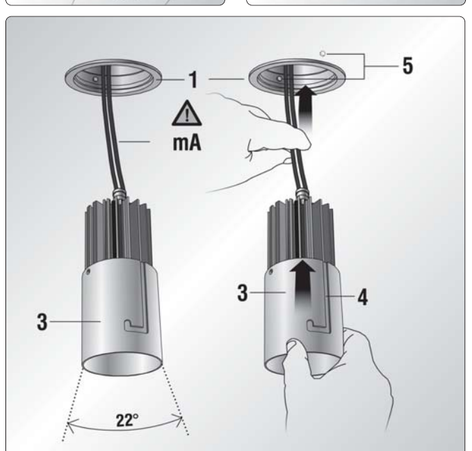

Drill the ceiling with a cutter corresponding to the diameter.

Bend the springs (2) of the housing (1) to put it into the hole with a counterclockwise rotation.

Make the connection of the spot light to the remote gear.

*Inserting element (3) inside element (1), pay attention to fit the two little guide cylinders (5) of the housing (1) into the grooves (4) (**Stage A**).*

*Rotate element (3) as far as it goes (**Stage B**).*

*Finally pull down element (3) till the foreseen final position (**Stage C**).*

To replace the LED light bulb, unscrew the two screws (6). Gently remove the LED support (1). After having replaced the LED lightbulb (7) put again support (1) and screw again the two screws (6).









Easy Pop installation on plasterboad: Pop P03/PX3/PY3/PZ3







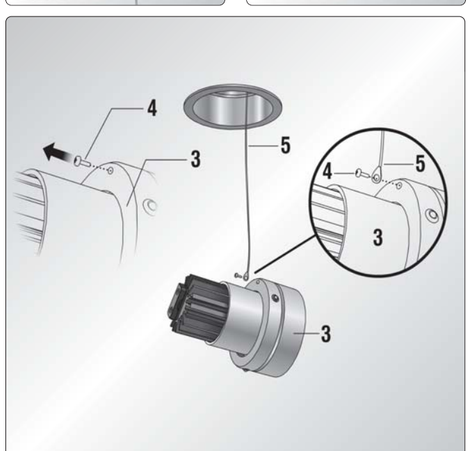

Drill the ceiling with a cutter corresponding to the diameter.

Bend contemporarily the springs (2) of the housing (1) to put it into the hole.

Unscrew the screw (4) of the lamp body.

Using the screw (4), fix the lamp body (3) to the safety anti-fall cable (5).

Make the connection of the spot light to the remote gear.

*Put the body of the lamp (3) into element (1) with the **CLICK UP**.*

Adjust element (6) as required.

*To replace the LED light bulb, gently remove the body of the lamp (3) **DOWN**.*



Vademecum

MC-E
MacAdams step:

é un parametro attraverso il quale si definisce il grado di decadimento del colore della luce di una sorgente led nel tempo.
Lo step 3 rappresenta ad oggi il livello di decadimento più basso.

it is a parameter which defines the deterioration degree of the colour of the light coming from a led source during its life.
Step 3 is nowadays the lower deterioration level.

es ist ein Parameter, der der Verschlechterungsgrad der Lichtfarbe eines Led Leuchtmittels während seines Lebens bestimmt.
Step 3 ist heutzutage das niedrigste Verschlechterungsniveau.

Est un paramètre avec le quel on défini le degré de détérioration de la couleur de la lumière d'une source led dans le temps.
Aujourd'hui le Step 3 est le niveau de détérioration le plus bas.

el es un parámetro que define el grado de deterioración del color de la luz de una fuente led en el tiempo. El step 3 representa hoy el nivel de deterioración más bajo.

CRI

Indice di resa cromatica di una sorgente luminosa, e misura di quanto naturali appaiano i colori degli oggetti da essa illuminati.

Colour Rendering Index of a light source and measure indicating how natural the colours of objects appear when enlightened from it.

Farbwiedergabeindex einer Lichtquelle und Maß, das, wie nach der Natur die Farben der Objekten sich herausstellen, wenn sie von dieser Lichtquelle beleuchtet sind, anzeigt.

Indice de rendu des couleurs d'une source lumineuse et mesure qui indique la pureté des couleurs des objets éclairés par cette source.

Indice de rendimiento lumínico de una fuente luminosa, y medida de lo natural del color de los objetos iluminados con dicha fuente.

lm

Il lumen è l'unità di misura del flusso luminoso di una sorgente luminosa.

Lumen is the unit of the light flux of a light source.

Lumen ist ein Maß der Strahlengang einer Lichtquelle.

Le lumen est l'unité de mesure du flux d'éclairage d'une source lumineuse.

El lumen es la unidad de medida del flujo luminoso de una fuente luminosa.

lx

Il lux è l'unità di misura per l'illuminamento di un'area piana.
Un lux è pari a un lumen fratto un metro quadrato.

Lux is the unit for the lighting of a flat area. One lux is equal to one lumen divided per one square meter.

Lux ist ein Maß für die Beleuchtung einer ebenen Oberfläche.
Ein lux ist gleich ein lumen geteilt durch einen quadratischen Meter.

Le lux est l'unité de mesure pour l'illumination d'une zone plaine.
Un lux corresponde à un lumen divisé par mètre carré.

El lux es la unidad de medida de iluminación de una superficie.
Un lux es equivalente a un lumen por metro cuadrado.

Classe I: Le componenti elettriche accessibili sono collegate ad un conduttore di terra.
Class I: Only basic insulation, accessible conductors are earthed. Earthing compulsory.
Klass I: Grundisolation leitenden; berührbare Metallteile sind mit Schutzerdung verbunden. Schtzerdung vorgeschriben.
Class I: Seulement isolation de base, les partes conductrices acessibles sont reliées à un conducteur terre. Mise à la terre obligatorie.
Clase I: Sólo aislamiento fundamental; además, las partes conductoras accesibles están conectados a un conductor de tierra. Puesta a tierra indispensable.

Classe II: Messa a terra esclusa, sostituita da cavi elettrici con un isolamento rinforzato.
Class II: basic insulation plus second insulation or both are replaced by reinforced insulation. Earthing excluded
Klasse II: Entweder zu der Grundisolierung kommt noch eine zweite Isolierung hinzu oder ist eine verstrebten Isolierung vorgesehen.
Class II: Soit à l'isolation, soit ces deux dernières sont remplacées par une isolation renforcée. Mise à la terre: excluse.
Clase II: Al aislamiento fundamental se añade un segundo aislamiento, o bien los dos aislamientos se reemplazan por un aislamiento reforzado.

Classe III: Alimentazione a bassa tensione, inferiore a 50V-50Hz. Messa a terra non prevista.
Class III: Low tension inferior to 50V-50Hz. No ground cable.
Klasse III: Niedervolt < 50V-50 HZ, ohne Erdung
Class III: Alimentation de sècurité à basse tension. Ne doit en aucun cas êntre utilisèe pour des tensions supèrieures à 50V-50Hz. mise à la terre.
Clase III: Alimentación de baja tensión, inferior a 50V-50Hz. Toma de tierra no prevista.

Apparecchio con caratteristiche per il montaggio diretto su superfici normalmente infiammabili (EN 60 598/VDE 0711).
Device which can be mounted on flammable surfaces (EN 60 598/VDE 0711).
Aparato con características para el montaje directo sobre superficies normalmente inflamables (EN 60 598/VDE 0711).

CE Prodotto conforme alle direttive europee.
Products complying with the Eur. Comm. rules.
Produkt gemaess den EU-Normen.
Producido conforme a las directivas europeas.

IP identification

Driver incluso
Driver included
Treiber mitgeliefert
Driver fourni
Driver incluido

Driver non incluso
Driver not included
Treiber nicht mitgeliefert
Driver non fourni
Driver excluido

lampadina inclusa
including bulb
Leuchtmittel inklusiv
ampoule comprise
bombilla incluida

trasformatore incluso
transformer included
Trafo mitgeliefert
transformateur fournie
transformador incluido

trasformatore non incluso
transformer not included
Trafo nicht mitgeliefert
transformateur non fournie
transformador excluido

IP0X
nessuna protezione
no protection
kein Schutz
non protégé
sin protección

IP1X
protezione contro corpi estranei ≥ 50mm
protection against solid objects ≥ 50mm
Schutz gegen Fremdkörpern ≥ 50mm
protection contre des corps étrangers ≥ 50mm
protegido contra objectos extraños ≥ 50mm

IP2X
protezione contro corpi estranei ≥ 12mm
protection against solid objects ≥ 12mm
Schutz gegen Fremdkörpern ≥ 12 mm
protection contre des corps étrangers ≥ 12mm
protegido contra objectos extraños ≥ 12mm

IP3X
protezione contro corpi estranei ≥ 2,5mm
protection against solid objects ≥ 2,5mm
Schutz gegen Fremdkörpern ≥ 2,5mm
protection contre des corps étrangers ≥ 2,5mm
protegido contra objectos extraños ≥ 2,5mm

IP4X
protezione contro corpi estranei ≥ 1mm
protection against solid objects ≥ 1mm
Schutz gegen Fremdkörpern ≥ 1mm
protection contre des corps étrangers ≥ 1mm
protegido contra objectos extraños ≥ 1mm

IP5X
protezione da polvere
dust-protected
Staubgeschützt
protection contre la poussière
aparato protegido contra el polvo

IP6X
stagno alla polvere
dust-proof
Staubdicht
hermétique à la poussière
aparato totalmente protegido contra el polvo

IPX0
nessuna protezione
no protection
kein Schutz
non protégé
sin protección

IPX1
protezione contro caduta acqua verticale
protected against water drops falling vertically
Schutz gegen Wassertropfen, die senkrecht herabfallen
protégé contre les gouttes d'eau tombant verticalement
protegido contra la caida de gotas de aqua

IPX2
protezione contro caduta di gocce oblique a 15°
protected against water drops max inclination 15°
Schutz gegen Wassertropfen, die senkrecht herabfallen Neigung15°
protégé contre les gouttes d'eau à inclinaison maximale de max15°
protegido contra la caida de gotas de aqua con inclinación max 15°

IPX3
protezione contro caduta di gocce oblique a 60°
protected against water drops max inclination 60°
Schutz gegen Wassertropfen, die senkrecht herabfallen Neigung 60°
protégé contre les gouttes d'eau à inclinaison de max 60°
protegido contra la caida de gotas de aqua con inclinación max 60°

IPX4
protezione contro spruzzi d'acqua
protected against sprinkling water
Spritzwassergeschützt
protégé contre les éclaboussures
aparato protegido contralas salpicaduras

IPX5
protezione contro getti d'acqua
protected against water jets
Wasserstrahlgeschutzt
protégé contre les gouttes d'eau
aparato totalmente protegido contra los chorros de agua

IPX6
protezione contro inondazioni
Potected against flooding
Uberschwemmunggeschutzt
rotected against flooding
aparato totalmente protegido contra

IPX7
protezione per immersione temporanea
protected against brief immersions
gegen kurzen Tauchen geschutzt
hermétique à la immersion
aparato totalmente protegido contra la sumersión

IPX8
protezione per immersione costante
protected against long immersion
Tauchengeschutzt
protégé pour des immersions prolongées
aparato totalmente protegido contra la larga imersión

General Sales Terms

1- Invalidity of the General Sales Terms and of the Price Lists previously in force
1.1 All the sales and payment terms previously in force are expressly cancelled and replaced by the following general sales terms, as the present price list cancels and replaces each previous edition; both are **valid since 01/09/2019** and they could be updated or modified at any time, giving notice if necessary through the pages of the web site www.otylight.com

2- Application and acceptance of the General Sales Terms:
2.1 The business relationships between Oty srl and its customers are exclusively regulated by the following general sales terms, with express renunciation and exclusion of any other agreement.
2.2 Sending an order to Oty srl, the customer declares to have gone through all the information given to him and to accept entirely, without any reservation, all the following general sales terms, which must be considered as an integral and substantial part of the sales contract.
2.3 The contract will be valid only once the customer's order is approved in writing by Oty srl. The parties could agree on possible changes, integrations or derogations to the above mentioned general sales terms, which should appear in writing in the documents including the order of the purchaser and the relating express acceptance of the seller in the order confirmation. The exclusions or the modifications introduced by the customer, if not expressly confirmed in written by Oty srl, do not bind Oty and do not become integral part of the contract, even if they have not been expressly refused and/or challenged. In any case the missing answer does not mean acceptance.
2.4 The customer is not entitled to damages and it is excluded any contractual or extra-contractual responsibility for direct or indirect damages to persons and/or things, caused by the missing acceptance, even if partial, of an order.

3- Presentation of the products:
3.1 Oty srl improves constantly its products and therefore reserves the right to introduce the necessary changes or updating at its exclusive discretion at any time. For this reason the products' technical and dimensional information (instructions for use, drawings, illustrations, technical data, weight, measure and performances descriptions) written in brochures, catalogues, newsletters, advertisements and in price lists are not binding if not expressly specified in the order confirmation, and could be subject to modifications or updating without any advance notice.

4- Offers and Prices:
4.1 All prices written in the price list are expressed in EURO, not including VAT.
4.2 These prices could be modified at any time at Oty srl exclusive discretion and with no obligation of any advance notice or communication.
4.3 Prices do not include light bulbs, if not differently and previously specified in written between the parties.
4.4 The offers of Oty srl and the customers' orders must be always considered "except for availability and prices changes".

5- Orders:
5.1 Each Order sent to Oty srl must be considered as a definitive and binding proposal for the purchaser, and this could be cancelled or modified only through a written agreement between the parties.
Anyway, the orders for customized products or for products different from standard Oty light's product, could not be cancelled neither totally nor partially once they have been sent to Oty srl.
5.2 After receiving the order Oty srl is not obliged to communicate to the customer that the net value of the above mentioned order, since it is lower than the free port limit, implies the non-application of the under mentioned delivery "free port" clause.
5.3 In case of integration orders or anyway of orders linked to the previous ones, Oty do not guarantee the delivery of the same tone or design of the material previously delivered.

6- Delivery
6.1 The delivery terms indicated on the orders' confirmations or verbally agreed between the parties, have only an indicative value. Their non-observance, as also the possible delivery of partial or reduced supplies, will not cause either the cancellation of the relating order or the application of any fine or the acknowledgment of any kind of compensation.

7- Packaging:
7.1 The products are provided packed in boxes of recyclable carton, whose cost is included in the price.

8- Pick up of the goods:
8.1 The ordered and supplied goods must be regularly picked up by the customer.
If Oty srl will not be responsible for the non-delivery or if the customer refuses the delivery of the goods, the customer himself will have to organize on his own, at his own expenses and on Oty written exhortation the pick up of the previously mentioned goods, which is the object of the contract, within the deadline communicated by Oty srl and, in addition, the customer will have to pay the price of the goods. Once this expiry date is passed uselessly, Oty srl is free from any responsibility and is authorized to issue an additional regular invoice for interests on arrears (ex D.Lgs 231/2002) accrued on capital and for goods storage costs and any further damage.
8.2 At the moment of the goods delivery by the forwarder, the customer has to make all the necessary controls to check the possible damages, missing pieces, defects or other apparent imperfections of the delivered goods in comparison to the order. Precisely he must control that:
8.2.1 The number of the delivered items corresponds to the number indicated in the delivery note.
8.2.2 The packaging is integral , not damaged , not wet or anyway altered, also the closing materials. Possible damages to the packaging and/or the goods, or the non-correspondence of the number of items or of the indications, must be immediately notified, writing " reservation of control" (and specifying the cause of this reservation) on the delivery note of the forwarder and also confirmed, writing the raised reservations in a recorded delivery letter with receipt of return to Oty srl. Once the delivery note of the forwarder has been signed, the customer could not complain anymore about the external peculiarities of the delivered goods.

9- Installation:
9.1 The installation and the connection/assembly of the goods, object of the supply, are at the customer's expenses and management.
All the products must be connected and installed according to the CE laws, or anyway to those in force, and according to the information contained in the catalogue and in the instruction sheets by skilled and expert personnel. Oty srl declines every responsibility for products sold and/or installed in countries in which there are laws that do not allow their use.

10- Returned goods:
10.1 Returned goods will be accepted only after written authorization by Oty srl and only if the product will be returned with all its original parts (including the possible documentation and accessories: instruction manuals, cables, etc…), in the original packaging, and within 7 days since the authorization. If just one of these requirements will be missing, Oty srl will return the goods to the sender ex factory. In any case, returned goods are considered free of port to Oty srl seat.
10.2 Except for any different instruction, the material will be credited only if it could be resold by Oty srl, net of costs for the control and restoring of it.
10.3 Anyway all the special productions, customized or produced according to the customer's specifications, or anyway different from standard Oty light product, as also the feeders/ballasts and housings for recessed items, could not be returned or refused.

11- Complaints:
11.1 Possible problems concerning the integrity, the correspondence or the completeness of the received goods, or any claim concerning manufacturing and/or quality defects of the goods must be notified in written, otherwise invalid, to Oty within 8 (eight) days since the date of the receipt of the goods (in case of apparent defects and/or imperfections) or since the discovery (in case of non-visible defects and/or defects).
Once this term is expired , no complain will be accepted.
11.2 For the approval of the complaint, the customer will have to demonstrate the correct maintenance and, if necessary, the correct installation of the product.
11.3 Possible claims or complaints, notified either bringing an action or raising an objection, will not allow the suspension of the goods' payments.
11.4 If the complaints will result groundless, Oty srl will debit the expenses paid for possible controls on the spot and also the costs and charges for possible surveys even if made by a third part.

12- Guarantee:
12.1 Oty product is made and controlled according to the CE laws, which guarantee the security and the technical quality of the materials.
12.2 Each Oty product has the guarantee foreseen by the laws in force since the delivery date of the goods, and by the way, the guarantee is limited to the items considered faulty and anyway to a maximum amount equal to the one of the bought goods. In any case Oty srl will not be obliged to compensate the customer for direct or indirect damages or for any other financial damage suffered by buyer or by a third part.
12.3 To benefit from assistance under guarantee, the customer must show the original invoice (or delivery note) and/or receipt for fiscal purposes.
12.4 The guarantee is applied to Oty product, if and only if, it is used correctly, according to its main use and to what is foreseen in the technical instructions attached.
12.5 It is excluded from the guarantee each defect of the product caused by a wrong installation, storage, maintenance, connection or assembling (non-observance of the CE laws in force and of the information written in the catalogue and in the possible assembling and instructions sheets), by a faulty servicing, by a wrong use or by a use not according to the technical or employment specifications (non-observance of the servicing and maintenance instructions and of the use conditions), by modifications or repairs, made by the customer or by a third part, by deteriorations or damages caused by external objects or events (such as incidents, blows, fires, acts of vandalism, water loss from pipes, natural or artificial lights (in case of discoloration), bad weather.
12.6 Products which have been tampered with or anyway damaged because of overloads, high or low voltage, unexpected chemical electrochemical/electrical alterations or because of a third party in general have no guarantee.
12.7 During the guarantee period, Oty srl commits itself , at its sole discretion, to substitute or repair the products or the products' pieces which Oty recognizes as faulty, or to reduce or pay back the corresponding price. Possible invoices for repairs made by a third part will not be in any case refunded by Oty srl.
12.8 If required , the customer will have to prove the defect with pictures which must be sent to Oty's e-mail address info@otylight.com.

13- Payment terms:
13.1 Except for any different instruction agreed in written between the parties, the supplies must be paid cash on delivery.
13.2 The payment must be made exclusively in Euro.
13.3 The customer does not have the right to counterbalance his debts towards Oty with his own possible credits or opposite demands. The customer could not raise any kind of objection to avoid or delay the payment of the required price.
13.4 In case of delayed payments, the customer must pay to Oty srl the interests on arrears (ex D.Lgs 231/2002), since the fixed expiry payment term. Possible discounts or allowances will decay.
13.5 In addiction to what specified in the previous point, if the customer will not pay, even a part of the price, within the fixed expiry term, he will lose the benefit of the postponed payment ("benefit of the term"), also for the existing supplies;
Oty srl could appeal to the application of articles no.1460 and 1461 of the Italian Civil Code and therefore suspend the ongoing supplies.

14- Withdrawal of the contract
14.1 Oty srl has the power to withdraw from the contract, with no charges, if it will know about the existence of protests as also the beginning of judicial (commanding decree) or extrajudicial processes against the client.

15- Renounce to recourse
15.1 Oty srl does not recognize to the customer the right of recourse (ex art. 131 D. Lgs: 06/09/2005, n. 206 and following modifications).

16- Applicable law and competent court:
16.1 The sales contract is regulated by the Italian law and it is excluded the application of any other international law or convention.
16.2 Considering the possible application of mandatory regulations , for any dispute related to the interpretation, application, execution of the sales contract and/or to the present "general sales terms" or anyhow related to them, the exclusive competent court will be Treviso.

Specific approval:
The customer/purchaser sending an order to Oty srl, admits and clearly confirms to have gone through and, according to the art. 1341 and 1342 C.C., and after reading, to accept and approve integrally and without reserve the above mentioned General Sales Terms, written also in the web site (www.otylight.com), which must be considered as an integral and substantial part of the sales contract and, in particular, the following articles:
1) Invalidity of the General Sales Terms and of the Price lists previously in force;
2) Application and acceptance of the General Sales Terms;
4) Offers and Prices;
5) Orders;
6) Delivery;
8) Pick up of the goods;
9) Installation of the product;
10) Returned goods;
11) Complaints;
12) Guarantee;
13) Payment terms;
14) Withdrawal of the contract;
15) Renounce to recourse;
16) Applicable law and competent court.

CREDITS

Graphic Concept	Claudio Malvestio
Stylist	Patrizia Toffolo
Images	Studio Fuoco - Franco Dell'Anna
Color separation	Artilab
Printing	Grafiche Gemma
Copyright	OTY s.r.l.
Printed in Italy	July - 2019

OTY RESERVES THE RIGHT TO INTRODUCE ANY CHANGES TO ITS OWN MODELS, WITHOUT NOTICE IN ADVANCE. ALL MODELS HAVE BEEN DULY REGISTRATED.

OTY SI RISERVA IL DIRITTO DI APPORTARE AL PROPRI MODELLI, SENZ'ALCUN PREAVVISO, QUALSIASI MODIFICA RITENESSE OPPORTUNA. TUTTI I MODELLI SONO DEPOSITATI.

OTY BEHALT SICH DAS RECHT VOR ÄNDERUNGEN VORZUNEHMEN, OHNE SOFORTIGE BENCHRICHTIGUNG. ALLE MODELLE SIND EINGETRAGEN.

OTY SE RÉSERVE LE DROIT D'APPORTER UNE QUELCONQUE MODIFICATION À LES MODÈLES SANS PRÉAVIS. TOUS NOUS MODÉLES SONT DÉPOSÉS.

OTY SE RESERVA EL DERECHO DE REALIZAR CUALQUIER MODIFICATIÒN SOBRE SUS MODELOS SIN PREVIO AVISO. TODOS LOS MODELOS HAN SIDO DEPOSITADOS.

Oty s.r.l.
via Spangaro 8/a
30030 Peseggia di Scorzé
(Venezia) Italy

www.otylight.com
e-mail: info@otylight.com
t. +39 (0)41 5830499
f. +39 (0)41 5830520